

SINCE **1990**

EDITION **17**



Open your dreams... and find your style

Nowadays, we live in a constant rush, trying to find peace, beauty, and a safe refuge at home and other places where we spend our time. A sense of security and harmony improves the everyday quality of life. INVADO understands and respects those needs.

Being one of the most rapidly developing manufacturers of door joinery and skirting boards in Poland, we do our best to give you products that meet your needs, with high, individual aesthetics, and the best possible functional features. Our market position is built on over thirty years of experience and continuous investment in technology, people, and quality improvement.



Quality above all

The belief that quality is of the utmost importance remains the common denominator of the design phase and the entire production process at INVADO. This is confirmed, among others, by the ISO 9001 Certificate, which ensures that all our products meet high European standards. The guarantee of the quality of products and services, in addition to the price and timeliness of deliveries, is the basic goal of the company, enabling it to be perceived as a trusted partner.

INVADO Technology

Production of door leaves and door frames is the strongest point of our INVA-DO offer, therefore the implementation of innovative production technology of foiled doors (INVADO Technology) became a breakthrough in the Company's activity. The most distinct feature of this technology is foiling surfaces without connecting foil on rebate edges. Because of this method, the edge of a door leaf looks aesthetically clean and is also more resistant to damage. It's very unlikely to break off the foil because it ends in the inner corner of the rebate—invisible to the eye. "Technology of foiling flat doors in the mass production system" has been in use since 2007 when it comes to all foiled doors. In addition—off-rebate foiling creates rounded edges in INVADO door leaves, safe for the hands of adults and children. Nowadays, thanks to the innovative method of door production, INVADO is among the most technologically advanced companies in Europe.

Hygienic certificates

Hygienic certifications aim to prevent materials and products hazardous to health and life to be introduced to the public or limit the acceptable range and application methods to eliminate health risks. All INVADO products have hygienic certificates:

- interior door frames in artificial veneer No. 441/322/451/2017
- interior door leaves in artificial veneer or flat lacquered No. 348/322/353/2020
- skirting boards in artificial veneer No. 256/322/261/2019

Technical Approvals and National Technical Assessments

Technical Approvals and National Technical Assessments, issued by the Building Research Institute, are decisions that grant the use of building materials and products. In accordance with the Construction Products Act of April 16th 2004, as amended (unified text: Journal of Laws of 2016, item 1570), the products to which the Technical Approvals and National Technical Assessments relate, may be placed on the market and can be used in construction. INVADO Company assessed and verified the constancy of performance, made a national declaration of performance, and labeled the products with a construction mark in accordance with applicable regulations. INVADO's Technical Approvals and National Technical Assessments:

- Interior flat and glass doors—ITB-KOT-2017/0313 edition 2;
- Modular interior doors—ITB-KOT-2017/0003 edition 2;
- Folding, swinging, and sliding interior doors—ITB-KOT-2018/0296 edition 1;
- Technical doors GUARDIA El,30 and El,60 (wooden interior entrance doors of HALSPAN system)—ITB-KOT-2018/0407 edition 1; National Certificate Of Stable Performance AC 158-UWB-W1355;
- Technical doors IGNIS—National Certificate Of Stable Performance AC 158-UWB-W3479;
- Interior entrance doors EGIDA with increased resistance to breaking-in—ITB-KOT-2018/0598 edition 1;
- Adjustable door frames for interior doors—ITB-KOT-2019/1221 edition 2;
- Block door frames for interior doors OB3 type P—ITB-KOT-2017/0312 edition 2;
- Door frames SARA-PRO for interior doors—ITB-KOT-2019/1076 edition 1;
- Metal door frames—ITB-KOT-2021/2091 edition 1;
- Housing system for metal door frames—ITB-KOT-2019/1221 edition 1.

CERTIFICATES AND AWARDS







BRAND OF THE DECADE 2009-2019 GOOD BRAND 2019 and 2021

An independent group of experts confirmed that products bearing the INVADO logo are characterized by: quality, trust, and reputation, awarding

our company the title of BRAND OF THE DECADE 2009-2019 and the titles of GOOD BRAND 2019 and GOOD BRAND 2021. We would like to thank our customers for the trust you place in us by choosing INVADO doors for their dream interiors, our Business Partners for fruitful cooperation, recommending, and support, and all INVADO Employees for jointly building a good brand at every stage of its creation. We are incredibly grateful that our hard work is appreciated and we look forward to the future with pride.



CONSUMER'S LAUREL

INVADO brand has been recognized by Polish consumers and honored with the prestigious Consumer's Laurel emblem.



VOC

The VOC certification tests the emission of volatile organic compounds released from the facility and, depending on the results obtained, the tested sample is assigned a class, ranging from A+ (best)

to C (worst). The possession of the VOC certificate confirms that the product does not release harmful to health substances inside the house, such as formaldehyde and benzene—carcinogenic elements that unfortunately are often contained in paints, and materials used on windows.



ISO 9001

ISO 9001

The INVADO Company applies to the Quality Management System and fulfills the requirements of PN-EN ISO 9001 in the scope of designing, production, and sale of furniture components and finishing profiles, interior doors made of wood and wood-based materials, and technical doors.



FSC™

Control of Product Origin and environmental protection are the leading elements of INVADO's development strategy. This is confirmed by an international certificate issued by the Forest Stewardship Council™ and obtained by the company in 2007.

The mark of

Ask for FSC™ certified products in our range.



CERTIFICATE RESOURCES SAVED

INVADO has obtained the international certificate in waste management and recycling issued by INTERSEROH zero waste solutions.













Novelties

AVANT-GARDE STYLE MILLED

the Belgatto and Decorato collection

We invite you to interiors inspired by **INVADO** milled doors. We present a harmonious combination of classics and modern design solutions—the **Belgatto** and **Decorato** collections. Mills—previously associated rather with classic design—have gained a completely new, fresh character, thanks to our designers. We recommend them for interiors where there is no room for boredom and clichéd arrangement ideas.

With a black dot above the "i"

You don't need much to create an interior with character. The door with a **black panel**, which

serves as an original decorative form, will be perfect as an arrangement of the dot above the "i". It perfectly corresponds with both the timeless white veneer, the classic color of European Oak, and Naturo Oak for those who miss the retro or fusion style.



PAGE 88





PAGE 90



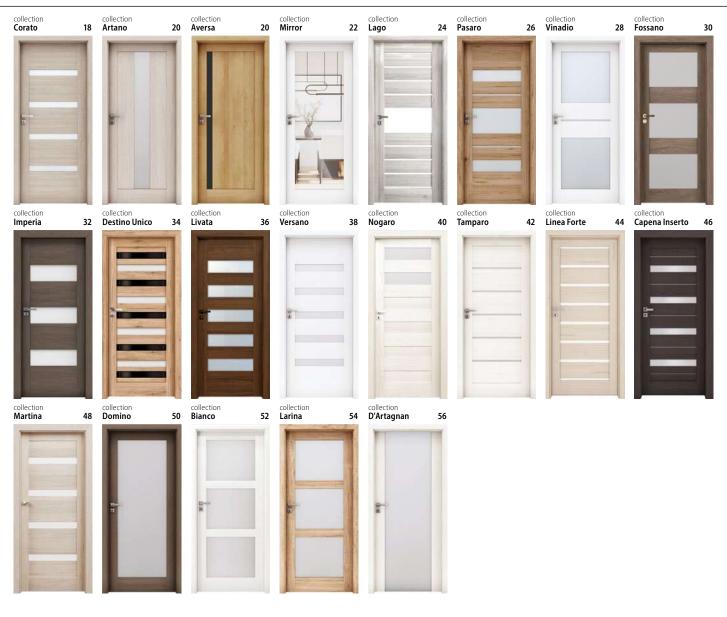


Table of contents



GOOD TO KNOW	8–10
GLASS TYPES	11
DECOR PALETTE	12–15
COLLECTION OF MODULAR DOORS	16–57
COLLECTION OF FOILED DOORS	58–85
MODERN AND OPTIMO LINE COLLECTION	86–107
COLLECTION OF GLASS DOORS	108
COLLECTION OF FOLDING DOORS	110
SLIDING SYSTEMS	
POCKET DOOR sliding system	112
WALL-MOUNTED sliding system	114
TECHNICAL DOORS	
EGIDA interior entrance doors	116
IGNIS fire doors	118
GUARDIA fire doors	120
TECHNICAL INFORMATION	122
DOOR FRAMES	
BLOCK door frame	125
ADJUSTABLE door frame (REBATED)	126
ADJUSTABLE door frame (NON-REBATED)	127
METAL door frames	128
Concealed door frame SARA-PRO	130
Housing system for metal door frames	132
ACCESSORIES	133–135
HANDLES	136
SKIRTINGS	138





COLLECTION OF FOILED DOORS



FOILED DOORS

Visually, **foiled doors** are lighter than modular ones, which is combined with their stability. Their construction is a frame made of MDF board with a "honeycomb" or tubular chipboard (charged extra) filling. The frame with the filling is covered with a 3 mm-thick HDF board from both sides and wrapped with a decorative foil. The glazing beads of different profiles are used to hold the filling elements in these doors.


16 DOOR collections 4 O colours of VENEERS SI LEAVES in total



MODULAR DOORS


Construction of **modular** doors: two vertical elements, upper and lower horizontal elements. Filling: MDF panels of different thicknesses or glass 4 mmthick. For each model you can select a decorative foil. Glass and other filling elements in these door leaves are not installed using glazing beads, but with all the construction elements at once, which greatly improves their stability.


21 DOOR 24 colours of 110 LEAVES in total

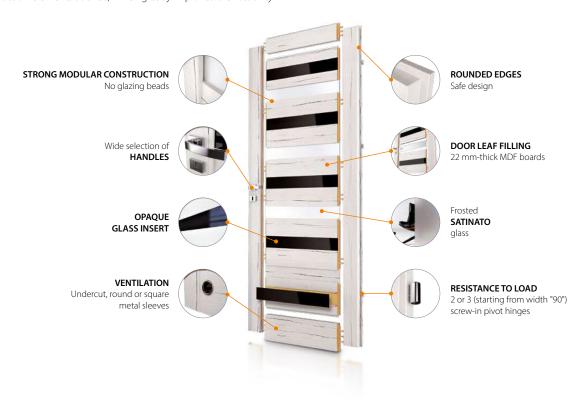

a obeyain







The edge of **a rebated door** leaf is finished with a rebate (visible in the picture A1) that overlaps a door frame when the door is closed. Door leaves made this way do not fit flush with a door frame.

The edge of **a non-rebated** door leaf has a flat surface. Door leaves made this way fit flush with a door frame (A2).

LEFT AND RIGHT DOOR

Before buying doors, it is worth considering in which direction they should open. For safety reasons, bathroom or kitchen doors should be installed in a way that makes it possible to open them outwards. In other areas, it is dependent on users' preference and the layout of the apartment or house.

The next step is to determine what kind of doors we are looking for; right or left doors. What does that mean? If the hinges are installed on the right side of a door frame, it means we need a right door, if the opposite—we have to choose the left door. Therefore, before going to the store it is worth reconsidering this question and writing down a list of needed right and left doors and to determine the opening direction for each of them.





DOOR PRICE CALCULATION

In most cases, the quoted prices are for a door leaf without a door frame and door handles. To obtain the full price of the door set, you have to use the following calculation:



LEGEND

Please note the annotations marked with the following icons. They contain important information related to the door leaf models.























FOIL-TYPES OF WOOD TEXTURE (GRAINING)


Structures of INVADO foils can be divided into 3 categories:



UNIDIRECTIONAL FOIL
WITH VERTICAL TEXTURE:
Most INVADO foils are available in this type of texture. Exceptions: Chestnut (ENDURO), Italian oak, and Severo oak (ENDURO 3D).



WITH HORIZONTAL TEXTURE:
Currently, there are two foils with this texture in the INVADO offer. These are: Italian oak and Severo oak (ENDURO 3D).



AND HORIZONTAL TEXTURE:
The combination of two previous types of texture.
There is one foil of that type in the INVADO
offer—Chestnut (ENDURO).









DOOR EDGE COLOUR



Due to the manufacturing technique, for doors from the OPTIMO LINE collection, it is possible to use the edge of the leaf in a different colour than its surface. The base for creating unique creations is the edge in the colour: pure black, alpine white, or natural Hamilton oak in combination with the OPTIMO LINE colour palette (p. 13)

DOOR EDGE COLOUR	DOOR COLOUR
B726 pure black	COLOUR PALETTE FOR OPTIMO LINE (p. 13)
B688 alpine white	COLOUR PALETTE FOR OPTIMO LINE (p. 13)

B717 natural hamilton oak

B687, B688 alpine white (p. 13)



satinato



chinchilla



transparent



ENDURO intensity of use: ● ● ○ ○ ○

ENDURO classification: Foil of high-quality design and a very good imitation of a natural wood structure. High durability. **Intended for:** buildings and living quarters with a wide range of use.

















ENDURO 3D intensity of use: ● ● ○ ○ ○

Three-dimensional reproduction of the wood structure and high durability.















UNIDIRECTIONAL FOIL (HORIZONTAL)

ENDURO PLUS intensity of use: ● ● ○ ○ ○
















ECO-VENEER FORTE ECO-VENEER laminate **CPL** •••• intensity of use: $\bullet \bullet \bullet \circ \circ$

 $\textbf{ECO-VENEER FORTE classification} - \textbf{high-quality laminate in modern colours, very high durability.} \\ \textbf{CPL} - \textbf{foil in modern colours.} \\$ Intended for: hotels, offices, public buildings.











LAMINATE CPL 0.15 mm / 0.8 mm

intensity of use: 0.15 mm: $\bullet \bullet \bullet \bullet \circ$ 0.8 mm: $\bullet \bullet \bullet \bullet \bullet$

Maximum strength decors, dedicated exclusively to the OPTIMO LINE door collection. Available in 2 thicknesses: 0.15mm (door leaves and frames), 0.8mm (door leaves).



















LAMINOLACK

intensity of use: $\bullet \bullet \bullet \circ$

LAMINOLACK

Classification LAMINOLACK: high-quality polypropylene foil is characterised by excellent durability.

Intended for: buildings and living quarters with a wide range of use.









NEW pure graphite B741





Pure black foil [B726], previously available only as a door frame colour, can now also be used in selected collections of our door leaves


CPL 0.15 mm and CPL 0.8 mm decors in NCS colours available for individual requests.

CPL 0.15 mm and CPL 0.8 mm decors in NCS colours available for individual requests.						
NCS S0907-Y30R	S0907-Y30R NCS S1060-Y10R		NCS S1505-Y50R	NCS 52060-Y10R		
Cotton Beige	Brilliant Yellow	Citrus Yellow	Sand Beige	Curry Yellow		
NCS 53502-Y	NCS S0502-Y50R	NCS S5040-R	NCS S1580-Y90R	NCS S3060-R		
Pebble Grey	Came Beige	Burgundy Red	China Red	Chilli Red		
NCS S7010-R30B	NCS S1030-R80B	NCS 53060-R90B	NCS S8505-R80B	NCS S3050-G40Y		
Aubergine Purple	Horizon Blue	Delft Blue	Indigo Blue	Kiwi Green		
NCS S1060-G40Y	NCS S5030-B30G	NCS S2005-Y60R	NCS S1500-N	NCS S2000-N		
Lime Green	Niagara Green	Cashmere Grey	Silk Grey	Light Grey		
NCS S4005-Y50R	NCS S5000-N	NCS S7005-Y20R	NCS S2005-Y20R	NCS S6005-Y20R		
Stone Grey	Dust Grey	Lava Grey	Taupe Grey	Cubanit Grey		
NCS S1000-N	NCS 54500-N	NCS 58500-N	NCS S6500-N	NCS S8000-N		
White Grey	Arctic Grey	Solid Soft Black	Onyx Grey	Graphite Grey		
NCS 59000-N	NCS S0502-G50Y	NCS S0300-N	NCS S0500-N	NCS S0500-N		
Black	Cream White	Platinum White	Premium White ST22	Premium White Solid		

Details on a non-standard offer should be arranged with the appropriate market manager
— see page 140.



CPL 0.15 mm and CPL 0.8 mm decors available for individual requests.

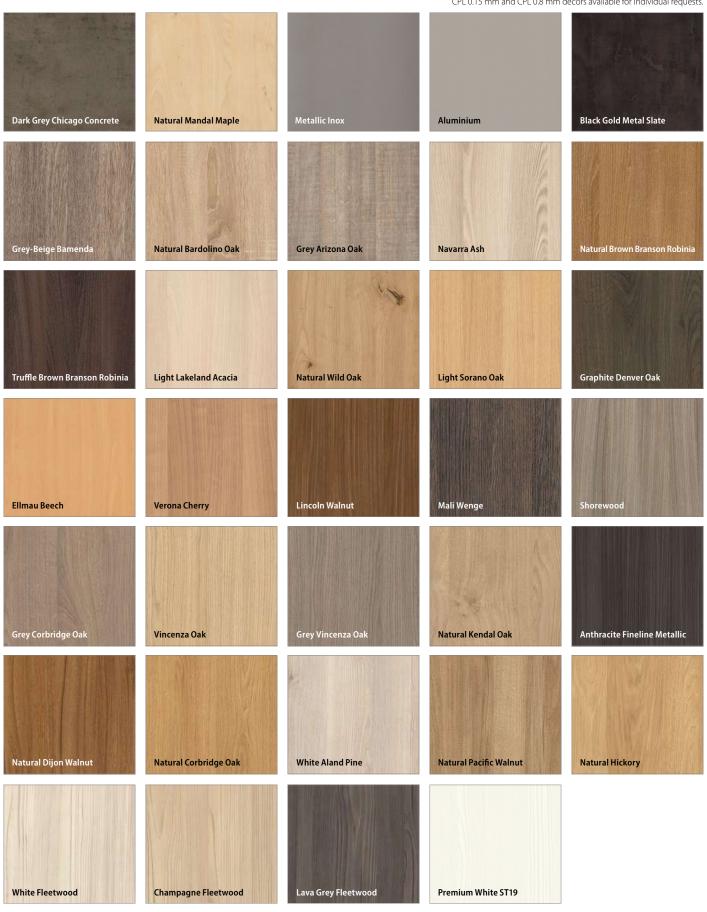

Details on a non-standard offer should be arranged with the appropriate market manager — see page 140.

COLLECTION OF

MODULAR DOORS

Corato	18
Artano	20
Aversa	20
Mirror	22
Lago	24
Pasaro	26
Vinadio	28
Fossano	30
Imperia	32
Destino Unico	34
Livata	36
Versano	38
Nogaro	40
Tamparo	42
Linea Forte	44
Capena Inserto	46
Martina	48
Domino	50
Bianco	52
Larina	54
D'Artagnan	56











DECORS

















CONSTRUCTION

filling element: 22 mm thick panel

filling element: panel or glass depending on the model (4 mm thick). Model 6 has black panels in B726

the frame is made of an MDF board: upper part of the frame is 350 mm high, lower part of the frame is 400 mm high

door leaf covered with ENDURO foil, ECO-VENEER or LAMINOLACK

- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)

4

3

width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert

 screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

 magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert

• hidden hinges with a 3D regulation in the colour satin chrome

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- door width "100"
- additional hinge for the door in sizes "60"-"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- · PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- door made in non-rebated version
- · double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

DEDICATED DOOR FRAMES

- [OB3] block door frame (possibility to add an architrave 10 \times 60 mm or 16 \times 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	e P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS







DECORS















CONSTRUCTION

- 1 filling element: 16 mm thick panel
- filling element: panel or glass depending on the model (4 mm thick). Aversa 3 has a black panel in B726
- 3 the frame is made of an MDF board
- door leaf covered with ENDURO foil, ECO-VENEER or LAMINOLACK
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

• lock /2

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"–"80", 3 pcs for door leaves in sizes "90" and "100"

 magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert

• hidden hinges with a 3D regulation in the colour satin chrome

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- door width "100"
- additional hinge for the door in sizes "60"-"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- · PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- door made in non-rebated version
- · double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

DEDICATED DOOR FRAMES

- [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
 [ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide 	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
 [ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide 	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS









DECORS













CONSTRUCTION

- 1 filling element: 6 mm thick panel
- 2 filling element: mirror (4 mm thick)
- the frame is made of an MDF board
- 4 door leaf covered with ENDURO foil, ECO-VENEER or LAMINOLACK
 - side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

- magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert
- hidden hinges with a 3D regulation in the colour satin chrome

DEDICATED DOOR FRAMES

- [OB3] block door frame (possibility to add an architrave 10 \times 60 mm or 16 \times 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	e P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"–"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- door made in non-rebated version
- double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137



















DECORS











ADDITIONAL OPTIONS

• additional hinge for the door in sizes "60"-"80"

· metal ventilation sleeves, round (chrome, golden)

• cylinder lock insert 31/36 (31/31 in non-rebated door leaves)

metal ventilation sleeves, square (chrome, nickel)
 door made in a non-rebated version for sliding systems

• automatic bottom door seal, widths "60"-"100"

Additional information: equipment and accessories

• aluminium threshold, widths "60"-"100"

· door made in non-rebated version

• additional hinge for the non-rebated door—included in a door frame

• caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit

· door without a keyhole

· door width "100"

· ventilation undercut

double door

· PVC ventilation sleeves



no extra charge

P. 133-137

CONSTRUCTION

- filling element: 22 mm thick panel
- filling element: panel or glass, depending on the model (4 mm thick)
- the frame is made of an MDF board
- 4 door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"



STANDARD EQUIPMENT

DEDICATED DOOR FRAMES

architrave 60 mm-wide

architrave 80 mm-wide

architrave 60 mm-wide

pa

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

- magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert
- · hidden hinges with a 3D regulation in the colour satin chrome

• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)

[ORS7] adjustable door frame for modular non-rebated doors with a flat angle

[ORS1] adjustable door frame for rebated doors with a flat angle

• [ORS8] adjustable door frame for rebated doors with a flat angle

[ORS10] adjustable door frame for modular non-rebated

doors with a flat angle architrave 80 mm-wide

[ORS4] adjustable 90° door frame for modular non-rebated

doors with a flat angle architrave 80 mm-wide

NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES



GLASS















DECORS















3





CONSTRUCTION

- filling element: 22 mm thick panel
- filling element: panel or glass, depending on the model (4 mm thick)
- the frame is made of an MDF board: upper part of the frame is 350 mm high, lower part of the frame is 400 mm high
- 4 door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

• lock 72 mm for a standard key, a WC knob, or a cylinder lock insert

 screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"–"80", 3 pcs for door leaves in sizes "90" and "100"

 magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert

• hidden hinges with a 3D regulation in the colour satin chrome

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- door width "100"
- additional hinge for the door in sizes "60"-"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- · door made in non-rebated version
- · double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

DEDICATED DOOR FRAMES

• $[OB3]$ block door frame (possibility to add an architrave 10×60 mm or 16×80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
 [ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide 	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS







DECORS ENDURO ·· ENDURO 3D · · LAMINOLACK ···· DOOR FRAME COLOUR B406 B541 B597 B598 B637 B402 B706 B639 ENDURO PLUS · · ECO-VENEER FORTE · · · ECO-VENEER CPL ··· B587 B473 B476 B462 B596 B705 B707 B708 B490









CONSTRUCTION

- 1 filling element: 22 mm thick panel
- filling element: panel or glass, depending on the model (4 mm thick)
- the frame is made of an MDF board
- 4 door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)

3

• width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

pa.

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

 magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert

• hidden hinges with a 3D regulation in the colour satin chrome

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"-"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- door made in non-rebated version
- double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories


P. 133-137

DEDICATED DOOR FRAMES

• $[{ m OB3}]$ block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	e P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS



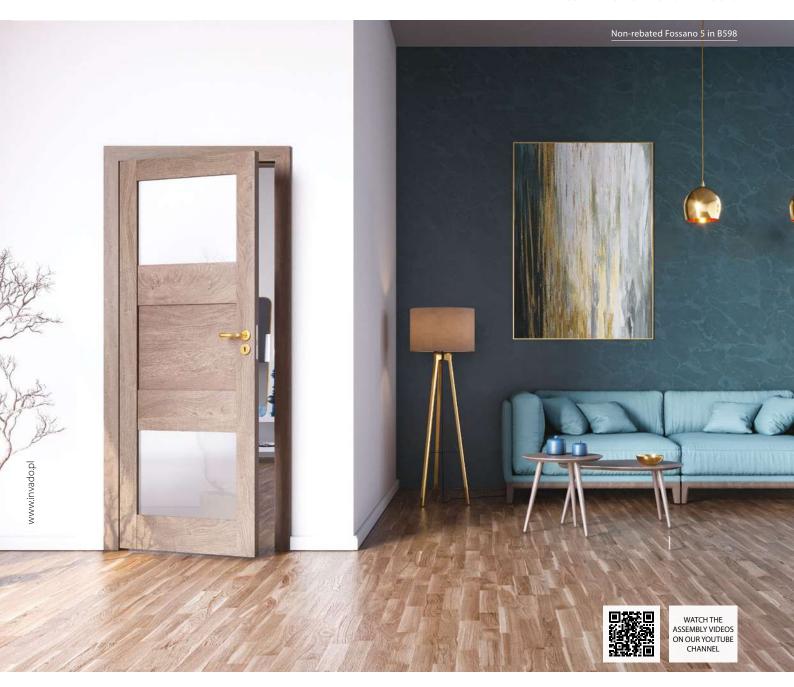















DECORS











B705















ECO-VENEER CPL ···



































CONSTRUCTION

- filling element: 22 mm thick panel
- filling element: panel or glass, depending on the model (4 mm thick)
- the frame is made of an MDF board
- 4 door leaf covered with ENDURO foil or ECO-VENEER
 - side edges and upper edge are foiled
 - rounded vertical edges of door leaves (more info on p. 122)
 - double door leaves have a rebate and a counter-rebate (drawing on p. 122)
 - width of single doors: "60"-"100" / width of double doors: "120"-"200"

3

STANDARD EQUIPMENT

• lock 72 mm for a standard key, a WC knob, or a cylinder lock insert

screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert

hidden hinges with a 3D regulation in the colour satin chrome

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"–"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- door made in non-rebated version
- double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

DEDICATED DOOR FRAMES

- $[OB3]$ block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
 [ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide 	P. 126
 [ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide 	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angl architrave 60 mm-wide	e P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
 [ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide 	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS







DECORS













CONSTRUCTION

- filling element: 22 mm thick panel
- filling element: panel or glass, depending on the model (4 mm thick)
- the frame is made of an MDF board: upper part of the frame is 350 mm high, lower part of the frame is 400 mm high
- door leaf covered with ENDURO foil, ECO-VENEER or LAMINOLACK
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

• lock 72 mm for a standard key, a WC knob, or a cylinder lock insert

• screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"–"80", 3 pcs for door leaves in sizes "90" and "100"

 magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert

• hidden hinges with a 3D regulation in the colour satin chrome

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"-"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- · door made in non-rebated version
- · double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories


P. 133-137

DEDICATED DOOR FRAMES

- [OB3] block door frame (possibility to add an architrave 10 \times 60 mm or 16 \times 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	e P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS



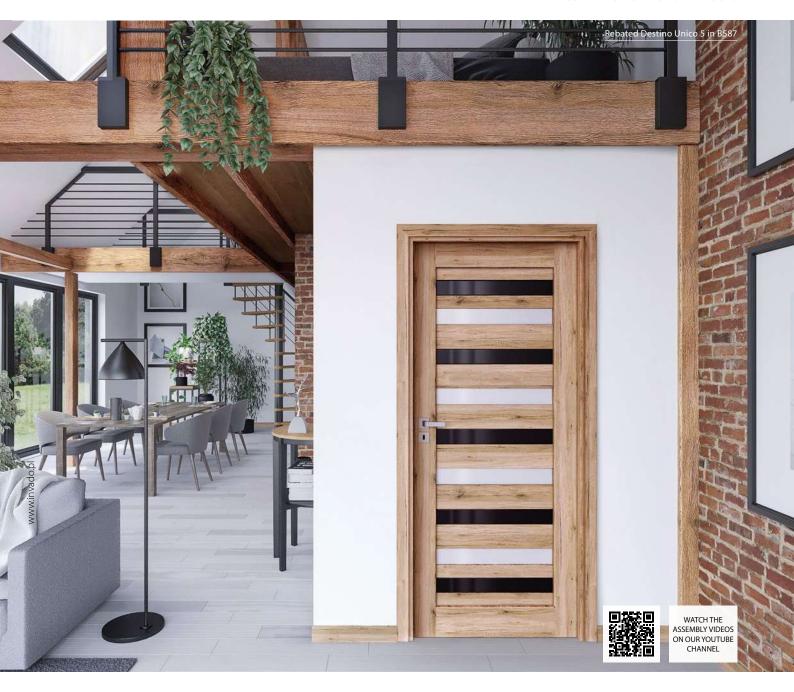























ER CPL ···

ENDURO PLUS ••						ECO-VENEER I	ORTE ···		ECO-VENEER
	7	1 9				1000	100000		
B462	B587	B596	B705	B707	B708	B473	B474	B476	B490
D40Z	D30/	D390	D/U3	D/U/	D/U0	D4/3	D4/4	D4/0	D490
 cedar forte 	naturo oak	snowy oak	spring oak	winter oak	siberian larch	duro walnut	eterno oak	grey oak	white















One of the most popular models of INVADO doors—DESTINO UNICO—has been awarded a "Gold Medal". These door leaves make a bold combination of colours which allows the creation of intriguing, stylized interiors.

Therefore, we did not doubt that this was the most suitable collection to be submitted to the prestigious "Gold Medal" contest, held at the International Poznań Fair BUDMA. The IPF "Gold Medal" is one of the most recognizable awards in the Polish market, which is given to innovative products of the highest quality. We are proud of this achievement and we would like to thank all those involved in the production and sales of our Destino Unico doors.

CONSTRUCTION

filling element: panel or glass, depending on the model (4 mm thick)

filling element: 22 mm thick panel

the frame is made of an MDF board

double-sides glass insert—80 mm wide

5 door leaf covered with ENDURO foil or ECO-VENEER

- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

· lock 72 mm for a standard key, a WC knob, or a cylinder lock insert

screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm

hidden hinges with a 3D regulation in the colour satin chrome

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

· door width "100"

• additional hinge for the door in sizes "60"-"80"

• additional hinge for the non-rebated door—included in a door frame

• caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit

· ventilation undercut

· PVC ventilation sleeves

· metal ventilation sleeves, round (chrome, golden)

• metal ventilation sleeves, square (chrome, nickel)

· door made in a non-rebated version for sliding systems

· door made in non-rebated version

double door

• cylinder lock insert 31/36 (31/31 in non-rebated door leaves)

• automatic bottom door seal, widths "60"-"100"

aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

DEDICATED DOOR FRAMES

- $[OB3]$ block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	e P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129


GLASS









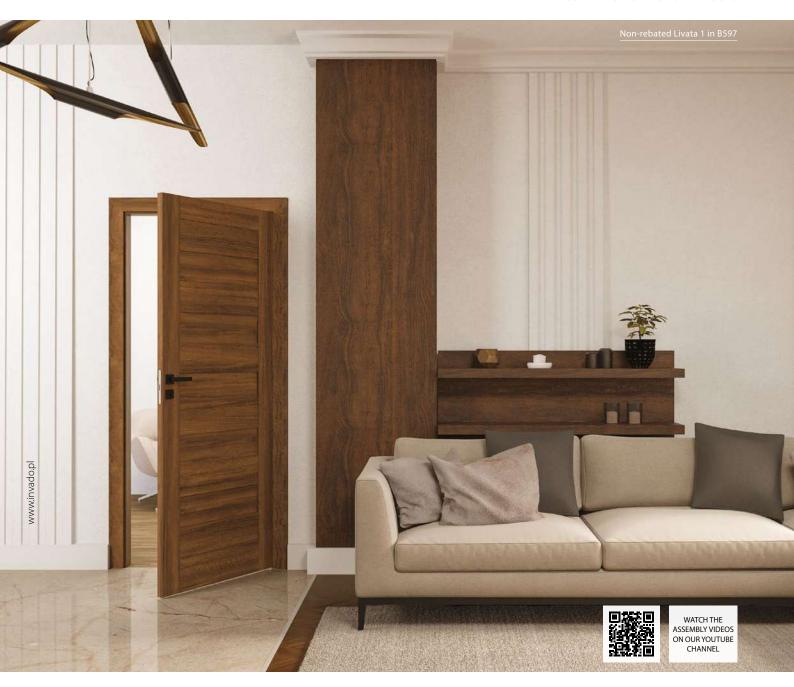















- filling element: 22 mm thick panel
- filling element: panel or glass, depending on the model (4 mm thick)
- the frame is made of an MDF board
- 4 door leaf covered with ENDURO foil or ECO-VENEER
 - side edges and upper edge are foiled
 - rounded vertical edges of door leaves (more info on p. 122)
 - double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

1

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert

 screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

 magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert

• hidden hinges with a 3D regulation in the colour satin chrome

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"-"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- door made in non-rebated version
- double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

DEDICATED DOOR FRAMES

• $[{ m OB3}]$ block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	e P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS





rebated



DECORS



ENDURO PLUS · ·





















ECO-VENEER CPL ···

B490





filling element: 22 mm thick panel

filling element: panel or glass, depending on the model (4 mm thick)

the frame is made of an MDF board: upper part of the frame is 350 mm high, lower part of the frame is 400 mm high

- 4 door leaf covered with ENDURO foil or ECO-VENEER
 - side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)

3

• width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

• lock 72 mm for a standard key, a WC knob, or a cylinder lock insert

 screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

 magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert

· hidden hinges with a 3D regulation in the colour satin chrome

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- door width "100"
- additional hinge for the door in sizes "60"–"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- · PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- door made in non-rebated version
- · double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

DEDICATED DOOR FRAMES

• $[OB3]$ block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
 [ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide 	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	e P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS



















CONSTRUCTION

- 1 filling element: 22 mm thick panel
- filling element: panel or glass, depending on the model (4 mm thick)
- the frame is made of an MDF board
- 4 door leaf covered with ENDURO foil, ECO-VENEER or LAMINOLACK
 - side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

pated

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"–"80", 3 pcs for door leaves in sizes "90" and "100"

- magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert
- hidden hinges with a 3D regulation in the colour satin chrome

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"-"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- door made in non-rebated version
- double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

DEDICATED DOOR FRAMES

• $[OB3]$ block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
 [ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide 	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	e P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS



















filling element: 22 mm thick panel

4 filling element: panel or glass, depending on the model (4 mm thick). Model 4 has black panels in B726

the frame is made of an MDF board

4 door leaf covered with ENDURO foil, ECO-VENEER or LAMINOLACK

- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

- magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert
- hidden hinges with a 3D regulation in the colour satin chrome

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

· door width "100"

2

3

- additional hinge for the door in sizes "60"-"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- door made in non-rebated version
- double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137


DEDICATED DOOR FRAMES

- [OB3] block door frame (possibility to add an architrave 10 \times 60 mm or 16 \times 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	e P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS













- 1 filling element: 22 mm thick panel
- filling element: panel or glass, depending on the model (4 mm thick). Models 7 and 8 have black panels in B726
- the frame is made of an MDF board
- door leaf covered with ENDURO foil, ECO-VENEER or LAMINOLACK
 - side edges and upper edge are foiled
 - rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

g

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

- magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert

• hidden hinges with a 3D regulation in the colour satin chrome

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- door width "100"
- additional hinge for the door in sizes "60"-"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- · PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- door made in non-rebated version
- · double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

DEDICATED DOOR FRAMES

- [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
 [ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide 	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
 [ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide 	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS















DECORS























ENDURO PLUS · ·































filling element: panel or glass, depending on the model (4 mm thick)

- filling element: 22 mm thick panel
- the frame is made of an MDF board
- 4 ALU strip—8 mm
- 5 door leaf covered with ENDURO foil or ECO-VENEER
 - side edges and upper edge are foiled
 - rounded vertical edges of door leaves (more info on p. 122)
 - double door leaves have a rebate and a counter-rebate (drawing on p. 122)
 - width of single doors: "60"-"100" / width of double doors: "120"-"200"

1 2 3

STANDARD EQUIPMENT

• lock 72 mm for a standard key, a WC knob, or a cylinder lock insert

 screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

 magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert

• hidden hinges with a 3D regulation in the colour satin chrome

ADDITIONAL OPTIONS

door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"-"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- · PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- · door made in non-rebated version
- · double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137


DEDICATED DOOR FRAMES

- [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS







LAMINOLACK ····

DOOR FRAME COLOUR

ENDURO ·· ENDURO 3D ·· ENDURO 3D ·· B597 B598 B637 B639 autumn oak precious oak classic walnut ashy oak anthracite european oak













CONSTRUCTION

- 1 filling element: 22 mm thick panel
- filling element: panel or glass, depending on the model (4 mm thick)
- the frame is made of an MDF board
- 4 door leaf covered with ENDURO foil or ECO-VENEER
 - side edges and upper edge are foiled
 - rounded vertical edges of door leaves (more info on p. 122)
 - double door leaves have a rebate and a counter-rebate (drawing on p. 122)
 - width of single doors: "60"-"100" / width of double doors: "120"-"200"

3

STANDARD EQUIPMENT

• lock 72 mm for a standard key, a WC knob, or a cylinder lock insert

 screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

 magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert

• hidden hinges with a 3D regulation in the colour satin chrome

ADDITIONAL OPTIONS

door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"-"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- · PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- door made in non-rebated version
- · double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

DEDICATED DOOR FRAMES

• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	e P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS













DOMINO 3-4, 8, 15-19 ARE NOT AVAILABLE IN DECORS: **B739**, **B726**, **B741**, **B743**, **B744**, **B742**

KONSTRUKCJA

- filling element: 10 mm thick panel
- filling element: panel or glass, depending on the model (4 mm thick)
- the frame is made of an MDF board
- 4 door leaf covered with ENDURO foil or ECO-VENEER
 - side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)

3

• width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

• lock 72 mm for a standard key, a WC knob, or a cylinder lock insert

 screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

 magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert

• hidden hinges with a 3D regulation in the colour satin chrome

ADDITIONAL OPTIONS

door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"-"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- door made in non-rebated version
- double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

DEDICATED DOOR FRAMES

- [OB3] block door frame (possibility to add an architrave 10 \times 60 mm or 16 \times 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	e P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS





















2

4

3

CONSTRUCTION

- filling element: 33 mm thick panel
- filling element: panel (10 mm thick) or glass (4 mm thick) depending on the model
- the frame is made of an MDF board
- door leaf covered with ECO-VENEER or LAMINOLACK
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

- magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert
- hidden hinges with a 3D regulation in the colour satin chrome

- additional hinge for the door in sizes "60"-"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut

ADDITIONAL OPTIONS

door without a keyhole

· door width "100"

- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- door made in non-rebated version
- double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

no extra charge

DEDICATED DOOR FRAMES

	- 405
• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
 [ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide 	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	e P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS



















DECORS



ENDURO PLUS · ·















































CONSTRUCTION

filling element: 35 mm thick panel

filling element: panel (10 mm thick) or glass (4 mm thick) depending on the model

the frame is made of an MDF board

4 door leaf covered with ENDURO foil, ECO-VENEER or LAMINOLACK

- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"-"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- · metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- door made in non-rebated version
- · double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert


hidden hinges with a 3D regulation in the colour satin chrome

DEDICATED DOOR FRAMES

•	$\hbox{\hbox{$[\tt OB3]} block door frame (possibility to add an architrave~10 \times 60 mm~or~16 \times 80 mm)$}$	P. 125
•	[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
	[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
•	[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	P. 127
•	[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
•	[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
	NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS



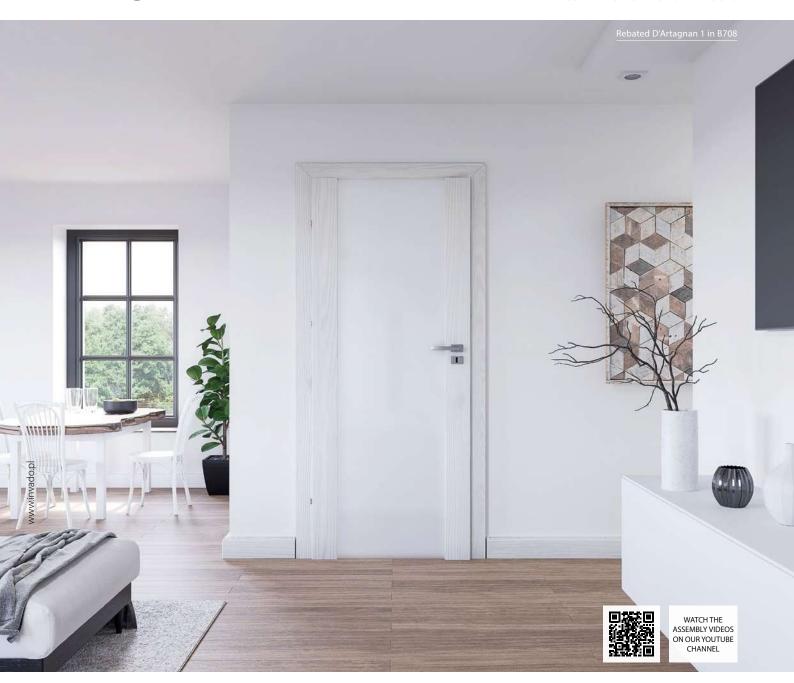



















frame is made of finger joint pinewood, covered with MDF and HDF boards

filling element: panel (10 mm thick) or glass (6 mm thick) depending on the model

door leaf covered with ENDURO foil or ECO-VENEER

- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

ADDITIONAL OPTIONS

• door without a keyhole

no extra charge

- door width "100"
- additional hinge for the door in sizes "60"–"80"
- additional hinge for the non-rebated door—included in a door frame
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- ventilation undercut (INTERO model)
- door made in non-rebated version
- · double door
- cylinder lock insert 31/36 (31/31 in non-rebated door leaves)

Additional information: equipment and accessories

P. 133-137

STANDARD EQUIPMENT

bated

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"–"80", 3 pcs for door leaves in sizes "90" and "100"
- magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert
- hidden hinges with a 3D regulation in the colour satin chrome

DEDICATED DOOR FRAMES

- $[OB3]$ block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
 [ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide 	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	e P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS

the matt (engraved) side of glass is located on the hinge side







longer execution time

longer execution time

COLLECTION OF

FOILED DOORS


Salerno	6
Norma Decor	6
orino	64
Merano	66
.ido	68
Dolce	70
Strada	72
Sagittarius	74
Gemini	76
/irgo	78
Parma	80
Orso	82
ibra	84
aurus .	84







DOOR LEAVES OPTIONS















1 the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut

3

- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- double door
- cylinder lock insert 31/36
- tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

DEDICATED DOOR FRAMES

•	[OB3] block door frame (possibility to add an architrave $10 \times 60 \text{ mm}$ or $16 \times 80 \text{ mm}$)	P. 125
•	[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
•	[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126


NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES

GLASS

P. 128-129







THE DOOR LEAF IS ALSO AVAILABLE IN A REBATED OPTION WITH A SHARP EDGE AND A NON-REBATED OPTION—INFO. P. 92, 104













1 the frame is made of an MDF board


(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides



- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)

5

width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"–"80", 3 pcs for door leaves in sizes "90" and "100"

DEDICATED DOOR FRAMES

• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
NOTE: THE OFFER ALSO INCLLIDES METAL DOOR FRAMES	P 128-129

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

• door width "100"

3

- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- · PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- · double door
- · cylinder lock insert 31/36
- tubular chipboard filling
- automatic bottom door seal, widths "60"-"90"
- automatic bottom door seal, widths "100"
- aluminium threshold, widths "60"–"90"
- aluminium threshold, widths "100"
- · ventilation grid

Additional information: equipment and accessories

P. 133-137

GLASS

the glossy side of glass is on the hinge side







ND2-ND5

extra charge


ND6 only




PORTHOLE in NORMA DECOR 6: available in silver and black colour with

the possibility of using a transparent or satin glass pane (option included in the price of the door leaf)

Torino — COLLECTION OF FOILED DOORS

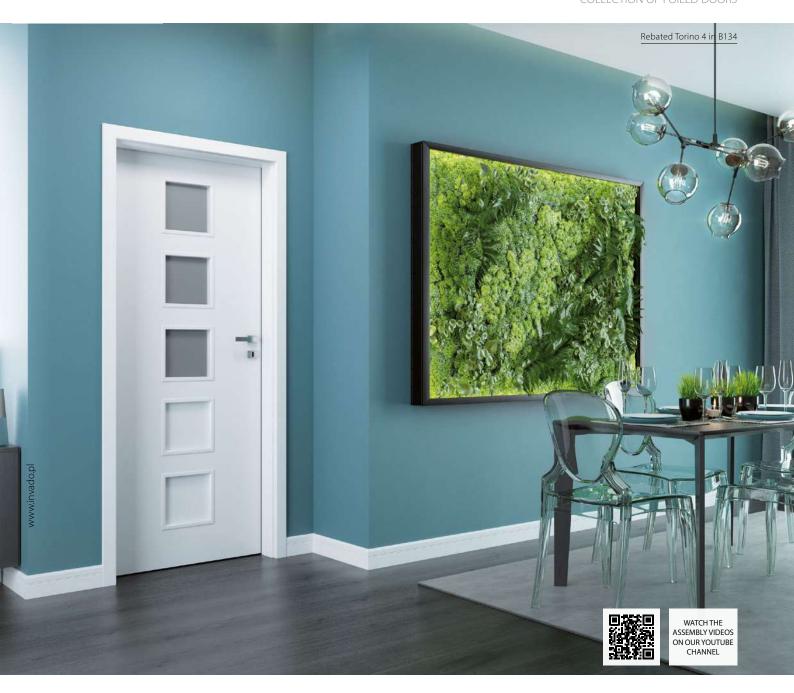

DOOR LEAVES OPTIONS









CONSTRUCTION

1 the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)

1

5

width of single doors: "60"-"100" / width of double doors: "120"-"200"

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- · PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- · double door
- cylinder lock insert 31/36
- tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"–"80", 3 pcs for door leaves in sizes "90" and "100"

DEDICATED DOOR FRAMES


• [OB3] block door frame (possibility to add an architrave 10×60 mm or 16×80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS






Merano —

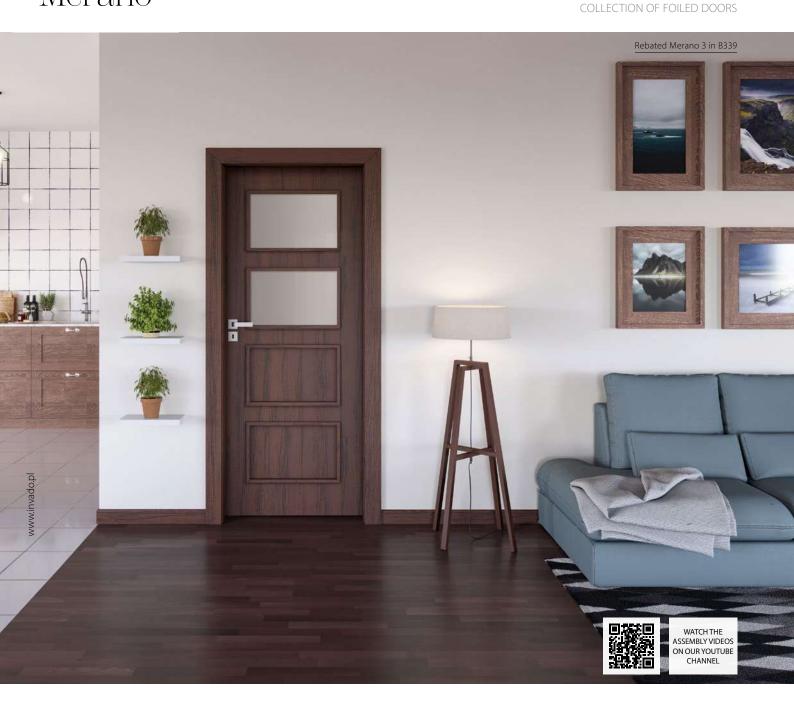

DOOR LEAVES OPTIONS



THE DOOR LEAF IS ALSO AVAILABLE IN A REBATED OPTION WITH A SHARP EDGE AND A NON-REBATED OPTION—INFO. P. 102

















CONSTRUCTION

1 the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- 5 door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)

5

• width of single doors: "60"-"100" / width of double doors: "120"-"200"

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- double door
- cylinder lock insert 31/36
- tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

DEDICATED DOOR FRAMES

• [OB3] block door frame (possibility to add an architrave $10 \times 60 \text{ mm}$ or $16 \times 80 \text{ mm}$)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126

NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES

GLASS

P. 128-129







Rebated Lido 14 in B134



DOOR LEAVES OPTIONS

"soft" foiling rebated 60–100 120–200 sliding systems with ventilation

THE DOOR LEAF IS ALSO AVAILABLE IN A REBATED OPTION WITH A SHARP EDGE AND A NON-REBATED OPTION—INFO. P. 94, 106







CONSTRUCTION

1 the frame is made of an MDF board

(STANDARD)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

4 door leaf covered with ENDURO foil or ECO-VENEER

- ALU strip—8 mm
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

ADDITIONAL OPTIONS

door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- double door
- cylinder lock insert 31/36
- tubular chipboard filling

standard

- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137


STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

DEDICATED DOOR FRAMES

• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAM	FS P. 128-129





THE DOOR LEAF IS ALSO AVAILABLE IN A REBATED OPTION WITH A SHARP EDGE AND A NON-REBATED OPTION—INFO. P. 96











1 the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- · double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

· door width "100"

3

- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- double door
- cylinder lock insert 31/36
- tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"–"100"

Additional information: equipment and accessories

P. 133-137

STANDARD EQUIPMENT


- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

DEDICATED DOOR FRAMES

• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ors8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS



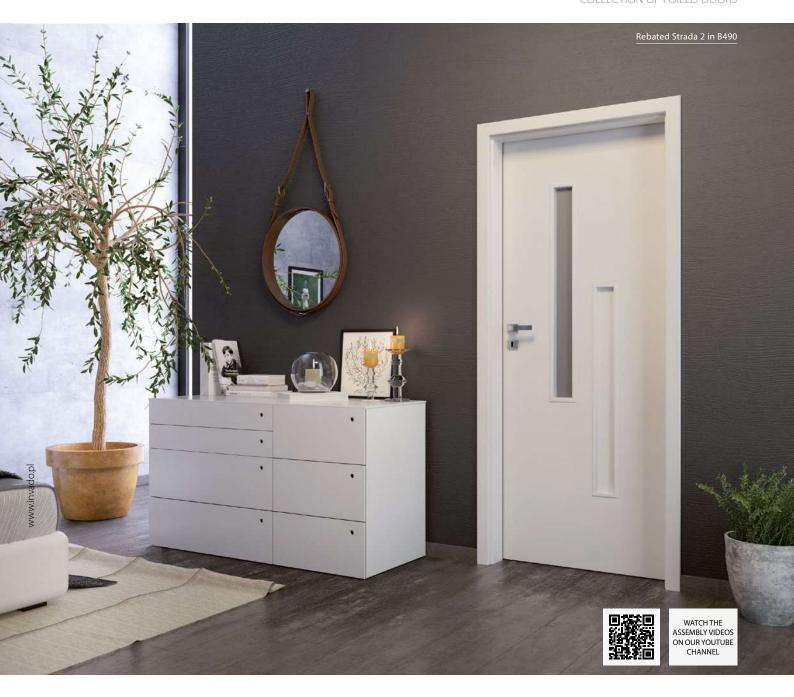

DOOR LEAVES OPTIONS



DECORS ENDURO ·· ENDURO 3D · · B136 B224 B339 B406 B288 B541 B134 B402 B706 B597 B598 B637 B639 ENDURO PLUS · · ECO-VENEER FORTE ··· ECO-VENEER CPL ··· LAMINOLACK ···· DOOR FRAME COLOUR B587 B473 B476 B462 B596 B705 B708









1 the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)

5

width of single doors: "60"-"100" / width of double doors: "120"-"200"

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

· door width "100"

3

- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- double door
- cylinder lock insert 31/36
- tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

DEDICATED DOOR FRAMES

• [OB3] block door frame (possibility to add an architrave $10 \times 60 \text{ mm}$ or $16 \times 80 \text{ mm}$)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS







DECORS ENDURO ·· ENDURO 3D · · B136 B224 B339 B406 B288 B541 B134 B402 ENDURO PLUS · · ECO-VENEER FORTE ··· ECO-VENEER CPL ··· LAMINOLACK ···· DOOR FRAME COLOUR B476 B462







3



CONSTRUCTION

1 the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)

5

width of single doors: "60"-"100" / width of double doors: "120"-"200"

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- double door
- cylinder lock insert 31/36
- tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"


DEDICATED DOOR FRAMES

• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ors8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS







DECORS ENDURO ·· ENDURO 3D · · B136 B224 B339 B406 B706 B288 B541 B134 B402 B597 B598 B637 B639 B656 B657 ENDURO PLUS •• ECO-VENEER FORTE ··· ECO-VENEER CPL ··· LAMINOLACK ···· DOOR FRAME COLOUR

B476

B490

B473

B708

B462

B587

B596

B705









1 the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)

5

• width of single doors: "60"-"100" / width of double doors: "120"-"200"

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

· door width "100"

3

- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- double door
- cylinder lock insert 31/36
- tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

STANDARD EQUIPMENT


- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

DEDICATED DOOR FRAMES


• [OB3] block door frame (possibility to add an architrave $10 \times 60 \text{ mm}$ or $16 \times 80 \text{ mm}$)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS



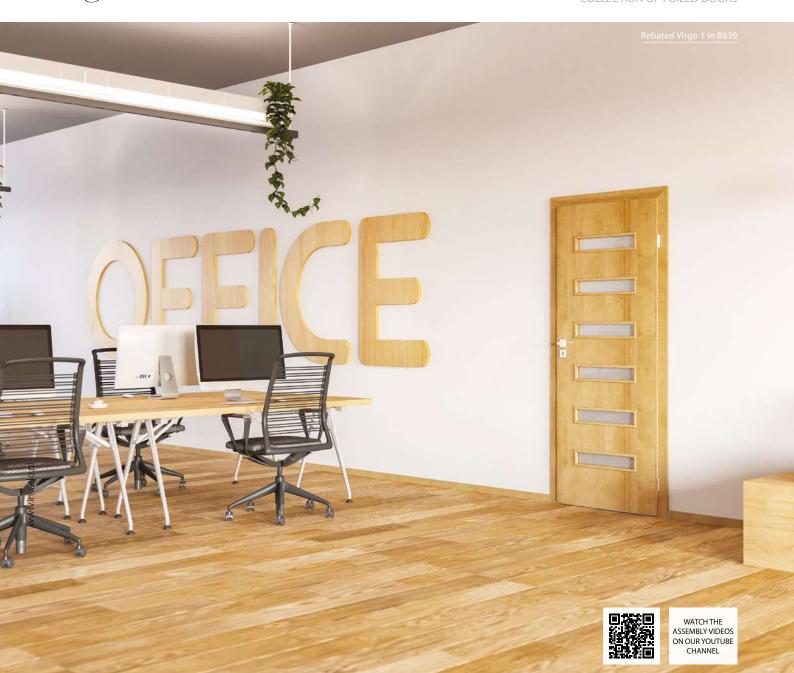

DOOR LEAVES OPTIONS



THE DOOR LEAF IS ALSO AVAILABLE IN A REBATED OPTION WITH A SHARP EDGE AND A NON-REBATED OPTION—INFO. P. 98













1 the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- 5 door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)

5

• width of single doors: "60"-"100" / width of double doors: "120"-"200"

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut

3

- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- double door
- cylinder lock insert 31/36
- tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"


DEDICATED DOOR FRAMES

• [OB3] block door frame (possibility to add an architrave 10×60 mm or 16×80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS







DECORS ENDURO ·· ENDURO 3D · · B136 B224 B339 B406 B288 B541 B134 B402 B706 B597 B598 B637 B639 B656 B657 ENDURO PLUS •• ECO-VENEER FORTE ··· ECO-VENEER CPL ··· LAMINOLACK ···· DOOR FRAME COLOUR

B476

B490

B473

B708

B462

B587

B596

B705

B707









1 the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- 5 door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut

3

- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- double door
- cylinder lock insert 31/36
- tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

DEDICATED DOOR FRAMES

• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
 [ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide 	P. 126
 [ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide 	P. 126
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS







THE DOOR LEAF IS ALSO AVAILABLE IN A REBATED OPTION WITH A SHARP EDGE AND A NON-REBATED OPTION—INFO. P. 100













3





CONSTRUCTION

1 the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

ADDITIONAL OPTIONS

• door without a keyhole

no extra charge

- · door width "100"
- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- double door
- cylinder lock insert 31/36
- tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"


DEDICATED DOOR FRAMES

• [OB3] block door frame (possibility to add an architrave 10×60 mm or 16×80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS















TAURUS DOOR LEAVES ARE AVAILABLE ONLY IN CHESTNUT B288

- 1 the frame is made of an MDF board
 - (STANDARD)
 - "honeycomb" filling
- (OPTIONAL)
 - tubular chipboard filling
- frame with filling is covered with HDF boards on both sides
- 5 door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

· door width "100"

3

- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- door made in a non-rebated version for sliding systems
- double door
- cylinder lock insert 31/36
- tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"

Additional information: equipment and accessories

P. 133-137

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

DEDICATED DOOR FRAMES

• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	P. 128-129

GLASS



MODERN AND OPTIMO

LINE

To meet the needs of the market and our most demanding customers, we present six collections of door leaves made in the technology of sharp edge veneering (90°)—**CUT EDGE**.

The **MODERN LINE** collection is available in selected, solid veneers from the standard offer, thanks to which the door can be matched to the interior dedicated to it.

OPTIMO LINE, in addition to the new, unique colours, also offers the possibility of using the edge of the door leaf in a different colour.





New



DOOR LEAVES OPTIONS



DECORS



LAMINOLACK ····



DOOR FRAME COLOUR































the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- 5 door leaf covered with ENDURO foil
 - side edges and upper edge are foiled
 - edge band in the colour of the door leaf (STANDARD) or pure black (OPTION)
- cut edges (90°) of door leaf (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"
- black milling—"U" with a width of 8 mm

STANDARD EQUIPMENT

• lock 72 mm for a standard key, a WC knob, or a cylinder lock insert

screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert

hidden hinges with a 3D regulation in the colour satin chrome

DEDICATED DOOR FRAMES

- [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
 [ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide 	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	. 128-129

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge


- · door width "100"
- · door made in non-rebated version
- door made in a non-rebated version for sliding systems
- · double door (selected models)
- · tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths: "60"-"100"
 - cylinder lock insert 31/36

- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit

- additional hinge—included in a door frame
- cylinder lock insert 31/31 · reinforcement for self-closer
- · ventilation undercut
- · pure black edge band of the door leaf (rebated and non-rebated)

Additional information: equipment and accessories


P. 133-137




New

Decorato

MODERN LINE COLLECTION

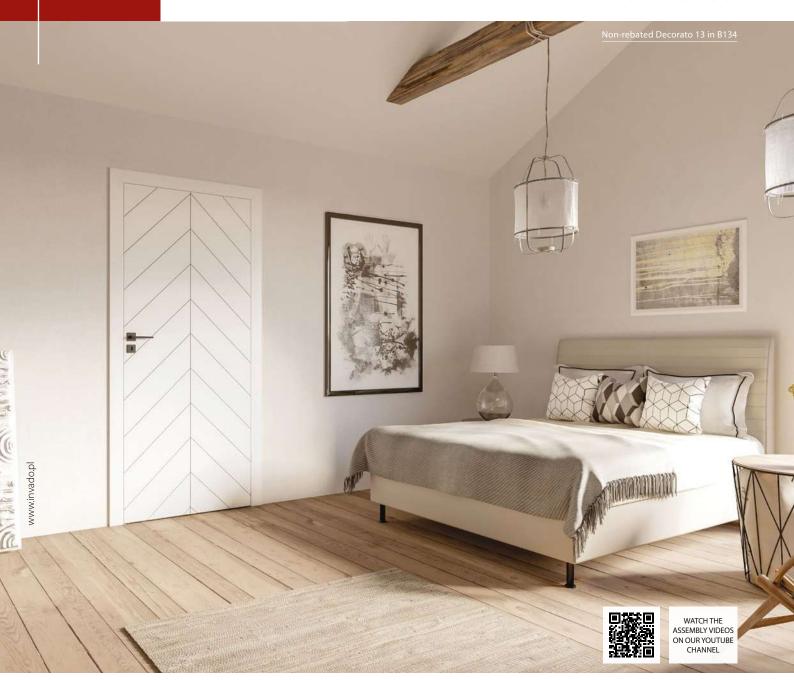

DOOR LEAVES OPTIONS

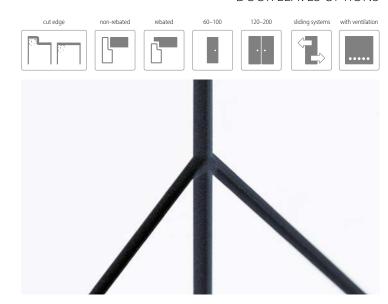


DECORS



LAMINOLACK

DOOR FRAME
COLOUR



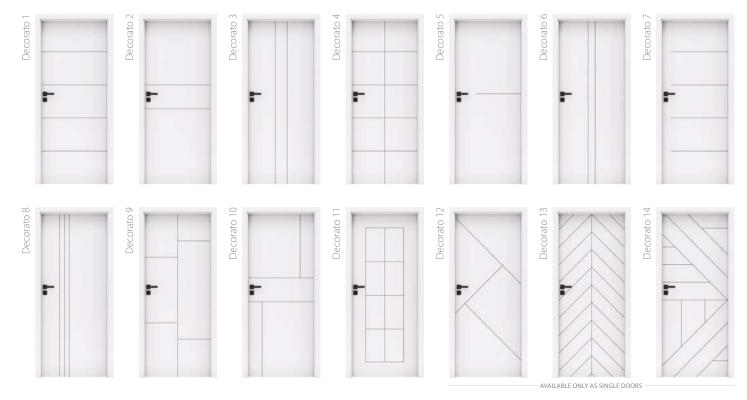

the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- 5 door leaf covered with ENDURO foil
 - side edges and upper edge are foiled
 - edge band in the colour of the door leaf (STANDARD) or pure black (OPTION)
 - cut edges (90°) of door leaf (more info on p. 122)
 - double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"
- black milling—"V" with a width of 3 mm

STANDARD EQUIPMENT

ebated

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"–"80", 3 pcs for door leaves in sizes "90" and "100"
- magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert
- hidden hinges with a 3D regulation in the colour satin chrome

DEDICATED DOOR FRAMES

- [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
 [ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide 	P. 126
 [ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide 	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
 [ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide 	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES P.	128-129

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- door made in non-rebated version
- door made in a non-rebated version for sliding systems
- double door (selected models)
- tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths: "60"-"100"
 - cylinder lock insert 31/36

rebated

- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit


• additional hinge—included in a door frame


cylinder lock insert 31/31


- reinforcement for self-closer
- · ventilation undercut
- pure black edge band of the door leaf (rebated and non-rebated)

Additional information: equipment and accessories

P. 133-137



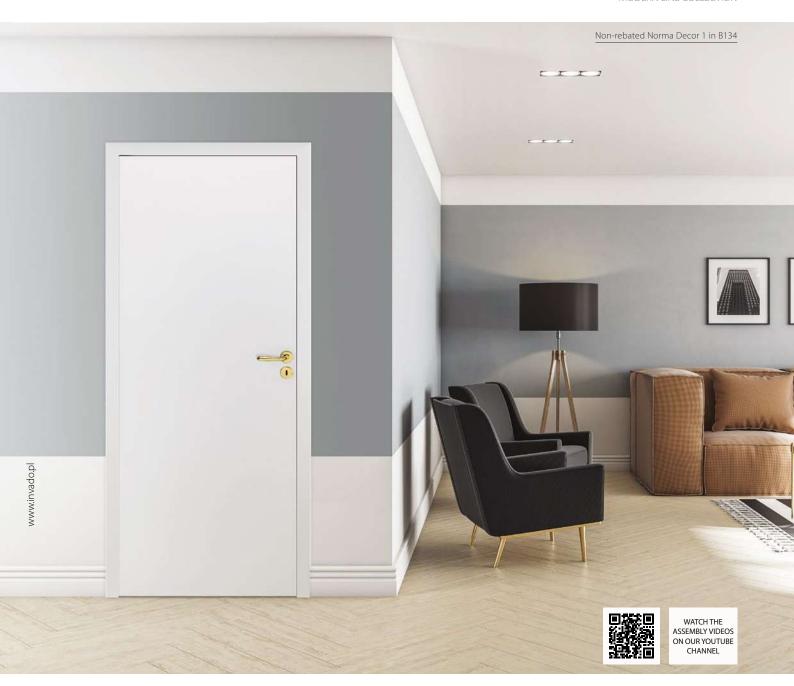









the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- 5 door leaf covered with ENDURO foil
- side edges and upper edge are foiled
- edge band in the colour of the door leaf
- cut edges (90°) of door leaf (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"–"100" / width of double doors: "120"–"200"

STANDARD EQUIPMENT

rebated

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"
- magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert
- hidden hinges with a 3D regulation in the colour satin chrome

DEDICATED DOOR FRAMES

- [OB3] block door frame (possibility to add an architrave 10 \times 60 mm or 16 \times 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
 [ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide 	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
 [ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide 	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	. 128-129

ADDITIONAL OPTIONS

• door without a keyhole

no extra charge

- · door width "100"
- door made in a non-rebated version for sliding systems
- double door

3

- · tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"
 - additional hinge for the door in sizes "60"-"80"

cylinder lock insert 31/36

• caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit

• additional hinge for the non-rebated door—included in a door frame

cylinder lock insert 31/31

- reinforcement for self-closer
- ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- · ventilation grid

Additional information: equipment and accessories

P. 133-137

















DECORS





















(STANDARD)

frame with filling is covered with $\ensuremath{\mathsf{HDF}}$ boards on both sides


- side edges and upper edge are foiled
- edge band in the colour of door leaf
- ALU strip—8 mm
- cut edges (90°) of door leaf (more info on p. 122)
- · double door leaves have a rebate and a counter-rebate (drawing on p. 122)

4

• width of single doors: "60"-"100" / width of double doors: "120"-"200"

1 the frame is made of an MDF board

tubular chipboard filling



STANDARD EQUIPMENT

• lock 72 mm for a standard key, a WC knob, or a cylinder lock insert

screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert

hidden hinges with a 3D regulation in the colour satin chrome

DEDICATED DOOR FRAMES

- [OB3] block door frame (possibility to add an architrave 10 \times 60 mm or 16 \times 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
 [ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide 	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
 [ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide 	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	. 128-129

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- door made in a non-rebated version for sliding systems
- · double door

2

· tubular chipboard filling

standard

- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"
 - cylinder lock insert 31/36

• additional hinge for the door in sizes "60"-"80"

- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- additional hinge—included in a door frame
- cylinder lock insert 31/31 · reinforcement for self-closer
- · ventilation undercut
- · PVC ventilation sleeves
- · metal ventilation sleeves, round (chrome, golden)
- · metal ventilation sleeves, square (chrome, nickel)

Additional information: equipment and accessories

P. 133-137

Dolce — MODERN LINE COLLECTION



DOOR LEAVES OPTIONS



DECORS











the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- 5 door leaf covered with ENDURO foil
- side edges and upper edge are foiled
- edge band in the colour of the door leaf
- cut edges (90°) of door leaf (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

ebated

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"
- magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert
- hidden hinges with a 3D regulation in the colour satin chrome

DEDICATED DOOR FRAMES

• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES P.	128-129

ADDITIONAL OPTIONS

• door without a keyhole

no extra charge

- · door width "100"
- door made in a non-rebated version for sliding systems
- double door

3

- tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"
 - cylinder lock insert 31/36
 - additional hinge for the door in sizes "60"-"80"
 - caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit

• additional hinge—included in a door frame

- cylinder lock insert 31/31
- · reinforcement for self-closer
- ventilation undercutPVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)

Additional information: equipment and accessories

P. 133-137

GLASS



MODERN LINE COLLECTION

Virgo



DOOR LEAVES OPTIONS















the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- 5 door leaf covered with ENDURO foil
- side edges and upper edge are foiled
- edge band in the colour of the door leaf
- cut edges (90°) of door leaf (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"–"100" / width of double doors: "120"–"200"

STANDARD EQUIPMENT

ebated

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"
- magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert
- hidden hinges with a 3D regulation in the colour satin chrome

DEDICATED DOOR FRAMES

• $[OB3]$ block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
 [ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide 	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES P.	128-129

ADDITIONAL OPTIONS

• door without a keyhole

no extra charge

- · door width "100"
- door made in a non-rebated version for sliding systems
- · double door

3

- · tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"
 - cylinder lock insert 31/36
 - additional hinge for the door in sizes "60"-"80"
 - caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit

• additional hinge—included in a door frame

- cylinder lock insert 31/31
 reinforcement for self-closer
- ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)

Additional information: equipment and accessories

P. 133-137

GLASS



Orso —



DOOR LEAVES OPTIONS



















the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- 5 door leaf covered with ENDURO foil
 - side edges and upper edge are foiled
- edge band in the colour of the door leaf
- cut edges (90°) of door leaf (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

ebated

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"
- magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert
- hidden hinges with a 3D regulation in the colour satin chrome

DEDICATED DOOR FRAMES

• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
 [ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide 	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES P.	128-129

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- door made in a non-rebated version for sliding systems
- · double door

3

- · tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"–"100"
 - cylinder lock insert 31/36
 - additional hinge for the door in sizes "60"-"80"
 - caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit

• additional hinge—included in a door frame


- cylinder lock insert 31/31
- · reinforcement for self-closer
- · ventilation undercut
- · PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)


Additional information: equipment and accessories

P. 133-137

GLASS



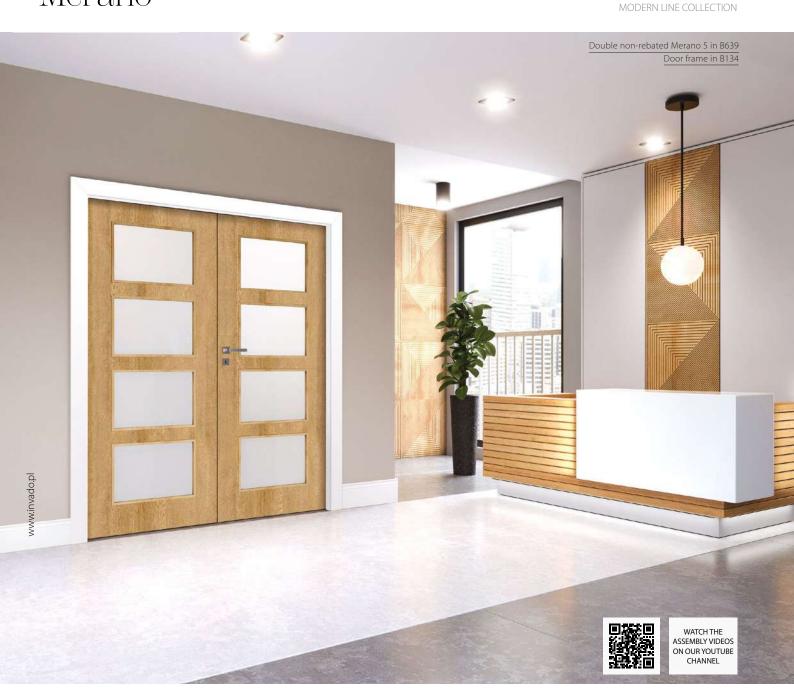



















the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- 5 door leaf covered with ENDURO foil
- · side edges and upper edge are foiled
- edge band in the colour of the door leaf
- cut edges (90°) of door leaf (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

ebated

• lock 72 mm for a standard key, a WC knob, or a cylinder lock insert

 screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"—"80", 3 pcs for door leaves in sizes "90" and "100"

 magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert

• hidden hinges with a 3D regulation in the colour satin chrome

DEDICATED DOOR FRAMES

- [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
[ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	. 128-129

ADDITIONAL OPTIONS

· door without a keyhole

no extra charge

- · door width "100"
- door made in a non-rebated version for sliding systems
- · double door

3

- tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths "60"-"100"
 - cylinder lock insert 31/36
 - additional hinge for the door in sizes "60"-"80"
 - caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit

• additional hinge—included in a door frame

- cylinder lock insert 31/31
- · reinforcement for self-closer
- · ventilation undercut
- · PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)

Additional information: equipment and accessories

P. 133-137


GLASS







DECORS










1 the frame is made of an MDF board

(STANDARD)

"honeycomb" filling

(OPTIONAL) tubular chipboard filling

frame with filling is covered with HDF



- door leaf covered with the CPL 0.15 mm, CPL 0.8 mm foil or LAMINOLACK
- side edges and upper edge are foiled
- edge band in the colour of the door leaf; option for non-rebated doors (see table on page 10). In double non-rebated door leaves, edge band in the colour of the door leaf and silver fittings are standard. However, it is possible to make them with pure black edge band and fittings as part of a custom order. In this case, please contact our Customer Service.
- cut edges (90°) of the door leaf (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

rebated

ebated

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"–"80", 3 pcs for door leaves in sizes "90" and "100"
- magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert
- hidden hinges with a 3D regulation in the colour satin chrome

DEDICATED DOOR FRAMES

• $[0B3]$ block door frame (possibility to add an architrave 10×60 mm or 16×80 mm)	P. 125
 [ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide 	P. 126
 [ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide 	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
 [ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide 	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES P. **	128-129

ADDITIONAL OPTIONS

door without a keyhole

no extra charge

- door width "100"—CPL 0.15 mm
- · door width "100"—CPL 0.8 mm
- door made in a non-rebated version for sliding systems
- double door
- · tubular chipboard filling
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths: "60"-"100"

ated

3

- cylinder lock insert 31/36
- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- additional hinge for the non-rebated door—included in a door frame
- cylinder lock insert 31/31

non-rebate

- edge band in the following colours: **B726** or **B688**
- edge band in the colour: B717 (option only for the leaf in B687, B688)
- a set of: 2 hinges + striking plate + door lock in colours: white, satin chrome, golden, black
- · reinforcement for self-closer
- ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)
- ventilation grid

Additional information: equipment and accessories

P. 133-137



PORTHOLE in NORMA DECOR 6: available in silver and black colour with the possibility of using a transparent or satin glass pane (option included in the price of the door leaf)





DECORS

















1 the frame is made of an MDF board

(STANDARD)

tubular chipboard filling

frame with filling is covered with HDF boards on both sides

- 4 door leaf covered with the CPL 0.15 mm
- side edges and upper edge are foiled
- edge band in the colour of the door leaf; option for non-rebated doors (see table on page 10). In double non-rebated door leaves, edge band in the colour of the door leaf and silver fittings are standard. However, it is possible to make them with pure black edge band and fittings as part of a custom order. In this case, please contact our Customer Service.

4

- ALU strip—8 mm
- cut edges (90°) of the door leaf (more info on p. 122)
- double door leaves have a rebate and a counter-rebate (drawing on p. 122)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

rebated

ebated

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13.5/9 (white zinc)—2 pcs for door leaves in sizes "60"–"80", 3 pcs for door leaves in sizes "90" and "100"

 magnetic lock 90 mm for a standard key, 95 mm for a WC knob, and 85 mm for a cylinder lock insert

• hidden hinges with a 3D regulation in the colour satin chrome

DEDICATED DOOR FRAMES

- [OB3] block door frame (possibility to add an architrave 10 \times 60 mm or 16 \times 80 mm)	P. 125
 [ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide 	P. 126
 [ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide 	P. 126
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	P. 127
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	P. 127
 [ORS4] adjustable 90° door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide 	P. 127
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES P.	.128-129

ADDITIONAL OPTIONS

• door without a keyhole

no extra charge

- door width "100"—CPL 0.15 mm
- door made in a non-rebated version for sliding systems
- double door
- automatic bottom door seal, widths "60"-"100"
- aluminium threshold, widths: "60"-"100"
 - cylinder lock insert 31/36

pated

2

- additional hinge for the door in sizes "60"-"80"
- caps for hinges (chrome, satin chrome, golden, black)—set for 1 hinge unit
- additional hinge for the non-rebated door—included in a door frame
- cylinder lock insert 31/31

n-rebated

- edge band in the following colours: **B726** or **B688**
- edge band in the colour: **B717** (option only for the leaf in **B687**)
- a set of: 2 hinges + striking plate + door lock in colours: white, satin chrome, golden, black
- reinforcement for self-closer
- · ventilation undercut
- PVC ventilation sleeves
- metal ventilation sleeves, round (chrome, golden)
- metal ventilation sleeves, square (chrome, nickel)

Additional information: equipment and accessories

P. 133-137

Amber — COLLECTION OF GLASS DOORS



LOCK COLOURS

Anodized silver [F150]

Stainless steel [F157]



DOOR LEAVES OPTIONS

60-90

ith ventilation



















Amber doors are divided into groups due to the types of glass decorations

GROUP I—basic glass (transparent or matte in various shades)

Amber 13—satinato glass

Amber 14—transparent glass

Amber 15—transparent glass

GROUP II—decorated glass (engraving or overprint)

Amb

Amber 3—overprint on transparent glass
Amber 6—overprint on transparent glass
Amber 12—engraving on satinato glass

CONSTRUCTION

- tempered glass, 8 mm thick
- the matt side of a glass pane is on the hinge side
- block or adjustable door frame, 2 hinges

DIMENSIONS OF GLASS DOORS (mm)

	"60"	"70"	"80"	"90"
door leaf width	617	717	817	917
door leaf height		(PL) 2027 / 1	975 (CZ/SK)	

DEDICATED DOOR FRAMES

 [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm) 	P. 125
[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126

ADDITIONAL OPTIONS

· ventilation undercut

LOCKS














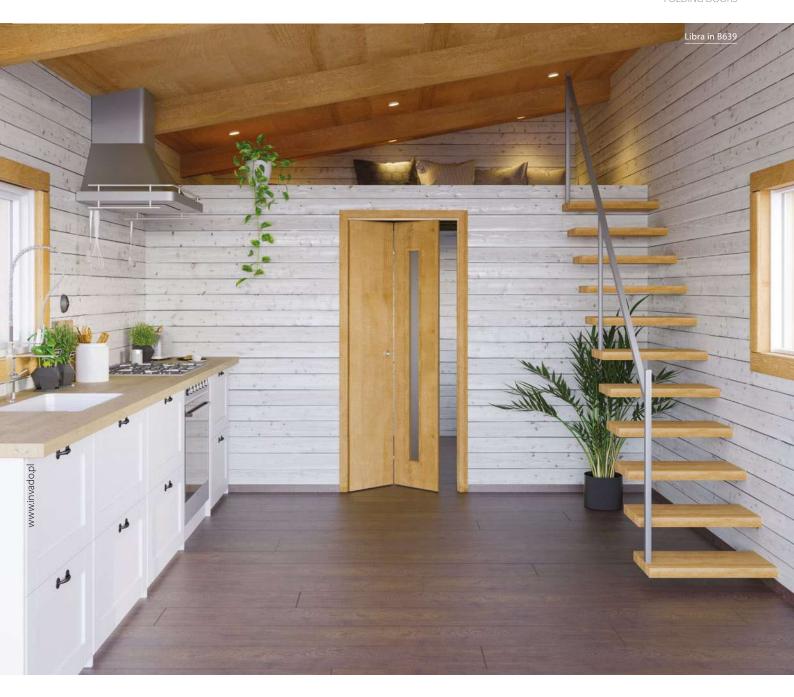

DOOR LEAVES OPTIONS



DECORS ENDURO .. ENDURO 3D ·· B136 B406 B541 B656 B134 B402 B639 ENDURO PLUS ·· ECO-VENEER FORTE ··· ECO-VENEER CPL ··· LAMINOLACK ···· DOOR FRAME COLOUR B462 B707 B476







CONSTRUCTION

construction of each half of the folding door consists of a frame made of MDF board or 33 mm thick semifinished coniferous wood glued in layers



frame and filling are covered with 3 mm thick MDF boards



- folding doors consist of a folding door and a block or adjustable door frame
- each half of a door leaf has a rabbet along the vertical edge
- both parts of a door leaf are joined together with hidden hinges
- the door leaf is connected to the floor with a spigot fixed in the holder, which is bolted to the floor
- the upper part is connected to the door frame with a spigot fixed in the holder, which is mounted in the rail bolted to the upper element of the door frame
- the sliding mechanism (trolley), mounted on the rail, stabilizes the door leaf when opening and closing
- rounded vertical edges of door leaves (more info on p. 122)
- universal door leaf ready to be mounted on the left or right side
- width of single doors: "60"-"90"

STANDARD EQUIPMENT

- 2 silver round grips in colour satin chrome
- 2 hidden hinges in colour satin chrome

DEDICATED DOOR FRAMES

•	[OB3] block door frame (possibility to add an architrave 10×60 mm or 16×80 mm)	P. 125
•	[ORS1] adjustable door frame for rebated doors with a flat angle architrave 60 mm-wide	P. 126
•	[ORS8] adjustable door frame for rebated doors with a flat angle architrave 80 mm-wide	P. 126

GLASS



the glossy side of glass is on the hinge side



The cassette with thickness 100 mm is designed for modular door leaves (eg. Domino, Versano, Tamparo) and standard flat doors.

The cassette with thickness 125 mm is designed for standard foiled door leaves (eg Torino, Strada).

DOOR LEAVES OPTIONS

single doors







STANDARD EQUIPMENT (THE SET INCLUDES)


- construction cassette for the sliding system in sizes "100" or "125"
- set of profiles (door frame), brushes and seals
- set of covering profiles for both sides of the door frame
- grip (chrome, satin, golden or black)


ADDITIONAL OPTIONS

- soft-close hardware for sliding door
- key hook lock or WC hook lock (chrome, satin, golden, black) with a grip suitable for key or WC lock. In case of door leaves equipped with a hook lock, the customer installs the striking plate in the door frame on their own
- key
- WC
- tunnel (door frame enlarging element)—price per each 10 mm
- strike plate




DIAGRAM OF THE LOCATION OF DOOR FRAME ELEMENTS FOR SLIDING SYSTEM—SINGLE SLIDING SYSTEM






DIMENSIONS OF THE CA	ASSETTE FOR SINGLE SLIDING	SYSTEM (mm)	DOOR L	EAF DIMENSIO	NS (mm)
internal width L x H	outer width C x H1	Α	В	wall thickness	width	height
610 x 2075 (PL) / 2025 (CZ-SK)	1346 x 2115 (PL) / 2065 (CZ-SK)	670	640		644	
710 x 2075 (PL) / 2025 (CZ-SK)	1546 x 2115 (PL) / 2065 (CZ-SK)	770	740		744	
810 x 2075 (PL) / 2025 (CZ-SK)	1746 x 2115 (PL) / 2065 (CZ-SK)	870	840	100-125	844	2040 (PL) 1988 (CZ-SK
910 x 2075 (PL) / 2025 (CZ-SK)	1946 x 2115 (PL) / 2065 (CZ-SK)	970	940		944	1300 (42 31)
1010 x 2075 (PL) / 2025 (CZ-SK)	/ 2025 (CZ-SK) 2146 x 2115 (PL) / 2065 (CZ-SK) 1070 1040		1040		1044	

DIAGRAM OF THE LOCATION OF DOOR FRAME ELEMENTS FOR SLIDING SYSTEM—DOUBLE SLIDING SYSTEM







DIMENSIONS OF THE CAS	SETTE FOR DOUBLE SLIDING SYST	EM (mm)	DOOR LEAF DIMENSIONS (mm)			
internal width L x H	outer width C x H1	Α	В	wall thickness	width	height	
1224 x 2075 (PL) / 2025 (CZ-SK)	2610 x 2115 (PL) / 2065 (CZ-SK)	1290	640		644		
1424 x 2075 (PL) / 2025 (CZ-SK)	3010 x 2115 (PL) / 2065 (CZ-SK)	1490	740		744		
1624 x 2075 (PL) / 2025 (CZ-SK)	3410 x 2115 (PL) / 2065 (CZ-SK)	1690	840	100-125	844	2040 (PL) 1988 (CZ-SK)	
1824 x 2075 (PL) / 2025 (CZ-SK)	3810 x 2115 (PL) / 2065 (CZ-SK)	1890	940		944	1900 (CZ 3K)	
2024 x 2075 (PL) / 2025 (CZ-SK)	4210 x 2115 (PL) / 2065 (CZ-SK)	2090	1040		1044		

H—internal height of the cassette; **H1**—outer height of the cassette; **L**—internal width of the cassette; **C**—outer width of the cassette;

DIAGRAM OF THE LOCATION OF DOOR FRAME ENLARGING ELEMENTS FOR THE POCKET DOOR SLIDING SYSTEM








Adjustment of more than 20 mm is done by enlarging el ment (tunnel—at extra charge)

CASSETTE ELEMENTS

A—upper profle + angle architrave; **B**—vertical profle + angle architrave; **C**—fender beam + angle architrave

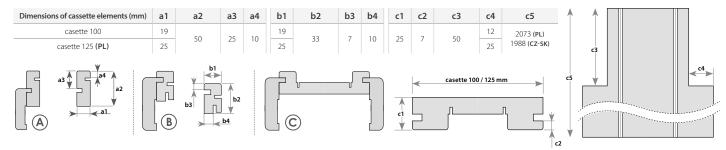







WC knob and a thimble





grip and a



strike plate



door seal



profiles and architraves





brush

soft-close hardware for sliding door



DOOR LEAVES OPTIONS







STANDARD EQUIPMENT (THE SET INCLUDES)

- · rail cover in the door leaf decor—installed on ALU strip (two types, depending on the width of the masking angle architrave used in the door frame—60 mm or 80 mm)
- · rail—installed on ALU strip
- grip—a set for both sides of the door leaf, and a thimble—1 piece (chrome, satin, golden, black)

ADDITIONAL OPTIONS AT EXTRA CHARGE


- soft-close hardware for sliding door
- bumper


- ENDURO/PLUS/3D
- ECO-VENEER / LAMINOLACK
- CPL 0,15 mm
- key
- · key hook lock or WC hook lock (chrome, satin, golden, black) with a grip suitable for key or WC lock
 - WC



DIMENSIONS OF THE DOOR LEAF AND THE DOOR FRAME FOR THE WALL-MOUNTED SLIDING SYSTEM

		C	door frame	for single	door (mm	٦)	door frame for double door (mm) – ATTENTION: CHANGE OF DIMENSIONS								1 S
		"60"	"70"	"80"	"90"	"100"	"120"	"130"	"140"	"150	"160"	"170"	"180"	"190"	"200"
door leaf width		644	744	844	944	1044	1288	1388	1488	1588	1688	1788	1888	1988	2088
width of the wall openi	ng*	674	774	874	974	1074	1310	1410	1510	1610	1710	1810	1910	2010	2110
outer width of the door	r frame	644	744	844	944	1044	1280	1380	1480	1580	1680	1780	1880	1980	2080
internal width of the do	oor frame	600	700	800	900	1000	1236	1336	1436	1536	1636	1736	1836	1936	2036
width of the door	60 mm [ORS3]	744	844	944	1044	1144	1380	1480	1580	1680	1780	1880	1980	2080	2180
frame with architraves	80 mm [ORS9]	784	884	984	1084	1184	1420	1520	1620	1720	1820	1920	2020	2120	2220
door leaf height							2	.040 (PL) / 1	988 (CZ-SK)					
height of the wall open	ning						2	.062 (PL) / 2	008 (CZ-SK)					
outer height of the doc	or frame						2	.047 (PL) / 1	993 (CZ-SK)					
internal height of the d	oor frame*						2	.025 (PL) / 1	971 (CZ-SK)					
height of the door	60 mm [ORS3]						2	.097 (PL) / 2	043 (CZ-SK)					
frame with architraves						2	117 (PL) / 2	063 (CZ-SK)						
	width of the wall openi outer width of the doo internal width of the do width of the door frame with architraves door leaf height height of the wall open outer height of the doo internal height of the do	width of the wall opening* outer width of the door frame internal width of the door frame width of the door frame with architraves door leaf height height of the wall opening outer height of the door frame internal height of the door frame* height of the door 60 mm [ORS3]	door leaf width width of the wall opening* outer width of the door frame internal width of the door frame width of the door frame 600 width of the door frame with architraves door leaf height height of the wall opening outer height of the door frame internal height of the door frame height of the door 60 mm [ORS3] 744 80 mm [ORS9] 784	door leaf width width of the wall opening* outer width of the door frame internal width of the door frame 600 600 600 600 600 600 600 6	"60" "70" "80" door leaf width 644 744 844 width of the wall opening* 674 774 874 outer width of the door frame 644 744 844 internal width of the door frame 600 700 800 width of the door frame 600 744 844 944 frame with architraves 80 mm [ORS3] 744 844 944 door leaf height 484 984 984 door leaf height 60 mm [ORS3] 60 mm [ORS3] height of the door frame* height of the door 60 mm [ORS3]	"60" "70" "80" "90" door leaf width 644 744 844 944 width of the wall opening* 674 774 874 974 outer width of the door frame 644 744 844 944 internal width of the door frame 600 700 800 900 width of the door 60 mm [ORS3] 744 844 944 1044 frame with architraves 80 mm [ORS9] 784 884 984 1084 door leaf height height of the wall opening outer height of the door frame internal height of the door frame* height of the door 60 mm [ORS3]	door leaf width 644 744 844 944 1044 width of the wall opening* 674 774 874 974 1074 outer width of the door frame 644 744 844 944 1044 internal width of the door frame 600 700 800 900 1000 width of the door frame with architraves 80 mm [ORS3] 744 844 944 1044 1144 frame with architraves 80 mm [ORS9] 784 884 984 1084 1184 door leaf height height of the wall opening outer height of the door frame internal height of the door frame* height of the door 60 mm [ORS3] 60 mm [ORS3] 60 mm [ORS3]	"60" "70" "80" "90" "100" "120"	"60" "70" "80" "90" "100" "120" "130" door leaf width 644 744 844 944 1044 1288 1388 width of the wall opening* 674 774 874 974 1074 1310 1410 outer width of the door frame 644 744 844 944 1044 1280 1380 internal width of the door frame 600 700 800 900 1000 1236 1336 width of the door frame with architraves 80 mm [ORS3] 744 844 944 1044 1144 1380 1480 frame with architraves 80 mm [ORS9] 784 884 984 1084 1184 1420 1520 door leaf height 2040 (PL) / 1 height of the wall opening 2062 (PL) / 2 outer height of the door frame 2047 (PL) / 1 internal height of the door 60 mm [ORS3]	"60" "70" "80" "90" "100" "120" "130" "140" door leaf width 644 744 844 944 1044 1288 1388 1488 width of the wall opening* 674 774 874 974 1074 1310 1410 1510 outer width of the door frame 644 744 844 944 1044 1280 1380 1480 internal width of the door frame 600 700 800 900 1000 1236 1336 1436 width of the door frame 60 mm [ORS3] 744 844 944 1044 1144 1380 1480 1580 frame with architraves 80 mm [ORS9] 784 884 984 1084 1184 1420 1520 1620 door leaf height 2040 (PL) / 1988 (CZ-SK beight of the wall opening 2062 (PL) / 2008 (CZ-SK outer height of the door frame* 2047 (PL) / 1993 (CZ-SK height of the doo	"60" "70" "80" "90" "100" "120" "130" "140" "150 door leaf width 644 744 844 944 1044 1288 1388 1488 1588 width of the wall opening* 674 774 874 974 1074 1310 1410 1510 1610 outer width of the door frame 644 744 844 944 1044 1280 1380 1480 1580 internal width of the door frame 600 700 800 900 1000 1236 1336 1436 1536 width of the door frame with architraves 80 mm [ORS3] 744 844 944 1044 1144 1380 1480 1580 1680 frame with architraves 80 mm [ORS9] 784 884 984 1084 1184 1420 1520 1620 1720 door leaf height 2062 (PL) / 1988 (CZ-5K) height of the door frame 2047 (PL) / 1993 (CZ-5K) <td>"60" "70" "80" "90" "100" "120" "130" "140" "150 "160" door leaf width 644 744 844 944 1044 1288 1388 1488 1588 1688 width of the wall opening* 674 774 874 974 1074 1310 1410 1510 1610 1710 outer width of the door frame 644 744 844 944 1044 1280 1380 1480 1580 1680 internal width of the door frame 600 700 800 900 1000 1236 1336 1436 1536 1636 width of the door frame 60 mm [ORS3] 744 844 944 1044 1144 1380 1480 1580 1680 frame with architraves 80 mm [ORS9] 784 884 984 1084 1184 1420 1520 1620 1720 1820 door leaf height 150 mm [ORS9] 784</td> <td>"60" "70" "80" "90" "100" "120" "130" "140" "150 "160" "170" door leaf width 644 744 844 944 1044 1288 1388 1488 1588 1688 1788 width of the wall opening* 674 774 874 974 1074 1310 1410 1510 1610 1710 1810 outer width of the door frame 644 744 844 944 1044 1280 1380 1480 1580 1680 1780 internal width of the door frame 600 700 800 900 1000 1236 1336 1436 1536 1636 1736 width of the door frame 60 mm [ORS3] 744 844 944 1044 1144 1380 1480 1580 1680 1780 1880 frame with architraves 80 mm [ORS9] 784 884 984 1084 1184 1420 1520 162</td> <td>"60" "70" "80" "90" "100" "120" "130" "140" "150 "160" "170" "180" door leaf width 644 744 844 944 1044 1288 1388 1488 1588 1688 1788 1888 width of the wall opening* 674 774 874 974 1074 1310 1410 1510 1610 1710 1810 1910 outer width of the door frame 644 744 844 944 1044 1280 1380 1480 1580 1680 1780 1880 internal width of the door frame 600 700 800 900 1000 1236 1336 1436 1536 1636 1736 1836 width of the door frame 60 mm [ORS3] 744 844 944 1044 1144 1380 1480 1580 1680 1736 1836 width of the door frame with architraves 80 mm [ORS9] 784 884 984 1084 1184 1420 1520 1620 1720 <t< td=""><td>"60" "70" "80" "90" "100" "130" "140" "150 "160" "170" "180" "190" door leaf width 644 744 844 944 1044 1288 1388 1488 1588 1688 1788 1888 1988 width of the wall opening* 674 774 874 974 1074 1310 1410 1510 1610 1710 1810 1910 2010 outer width of the door frame 644 744 844 944 1044 1280 1380 1480 1580 1680 1780 1880 1980 internal width of the door frame 600 700 800 900 1000 1236 1336 1436 1536 1636 1736 1836 1936 width of the door frame with architraves 80 mm [ORS3] 744 844 944 1044 1144 1380 1480 1580 1680 1780 1880 1980 <tr< td=""></tr<></td></t<></td>	"60" "70" "80" "90" "100" "120" "130" "140" "150 "160" door leaf width 644 744 844 944 1044 1288 1388 1488 1588 1688 width of the wall opening* 674 774 874 974 1074 1310 1410 1510 1610 1710 outer width of the door frame 644 744 844 944 1044 1280 1380 1480 1580 1680 internal width of the door frame 600 700 800 900 1000 1236 1336 1436 1536 1636 width of the door frame 60 mm [ORS3] 744 844 944 1044 1144 1380 1480 1580 1680 frame with architraves 80 mm [ORS9] 784 884 984 1084 1184 1420 1520 1620 1720 1820 door leaf height 150 mm [ORS9] 784	"60" "70" "80" "90" "100" "120" "130" "140" "150 "160" "170" door leaf width 644 744 844 944 1044 1288 1388 1488 1588 1688 1788 width of the wall opening* 674 774 874 974 1074 1310 1410 1510 1610 1710 1810 outer width of the door frame 644 744 844 944 1044 1280 1380 1480 1580 1680 1780 internal width of the door frame 600 700 800 900 1000 1236 1336 1436 1536 1636 1736 width of the door frame 60 mm [ORS3] 744 844 944 1044 1144 1380 1480 1580 1680 1780 1880 frame with architraves 80 mm [ORS9] 784 884 984 1084 1184 1420 1520 162	"60" "70" "80" "90" "100" "120" "130" "140" "150 "160" "170" "180" door leaf width 644 744 844 944 1044 1288 1388 1488 1588 1688 1788 1888 width of the wall opening* 674 774 874 974 1074 1310 1410 1510 1610 1710 1810 1910 outer width of the door frame 644 744 844 944 1044 1280 1380 1480 1580 1680 1780 1880 internal width of the door frame 600 700 800 900 1000 1236 1336 1436 1536 1636 1736 1836 width of the door frame 60 mm [ORS3] 744 844 944 1044 1144 1380 1480 1580 1680 1736 1836 width of the door frame with architraves 80 mm [ORS9] 784 884 984 1084 1184 1420 1520 1620 1720 <t< td=""><td>"60" "70" "80" "90" "100" "130" "140" "150 "160" "170" "180" "190" door leaf width 644 744 844 944 1044 1288 1388 1488 1588 1688 1788 1888 1988 width of the wall opening* 674 774 874 974 1074 1310 1410 1510 1610 1710 1810 1910 2010 outer width of the door frame 644 744 844 944 1044 1280 1380 1480 1580 1680 1780 1880 1980 internal width of the door frame 600 700 800 900 1000 1236 1336 1436 1536 1636 1736 1836 1936 width of the door frame with architraves 80 mm [ORS3] 744 844 944 1044 1144 1380 1480 1580 1680 1780 1880 1980 <tr< td=""></tr<></td></t<>	"60" "70" "80" "90" "100" "130" "140" "150 "160" "170" "180" "190" door leaf width 644 744 844 944 1044 1288 1388 1488 1588 1688 1788 1888 1988 width of the wall opening* 674 774 874 974 1074 1310 1410 1510 1610 1710 1810 1910 2010 outer width of the door frame 644 744 844 944 1044 1280 1380 1480 1580 1680 1780 1880 1980 internal width of the door frame 600 700 800 900 1000 1236 1336 1436 1536 1636 1736 1836 1936 width of the door frame with architraves 80 mm [ORS3] 744 844 944 1044 1144 1380 1480 1580 1680 1780 1880 1980 <tr< td=""></tr<>





AVAILABLE DOOR FRAMES

[ORS3] adjustable door frame with a flat angle architrave 60 mm-wide the set includes: a door frame and a bumper with milling and striking plate

[ORS9] adjustable door frame with a flat angle architrave 80 mm-wide the set includes: a door frame and a bumper with milling and striking plate

CLASSIFICATION OF RAILS AND RAIL COVERS DEPENDING ON THE WIDTH OF THE SLIDING SYSTEM

door leaf	length of rail cover	number of rail cover elements	number of rails and angle architraves
"60"	1350 mm		
"70"	1550 mm		1 rail and angle archi-
"80"	1750 mm	1 element	trave 200 cm-long
"90"	1950 mm		
"100"	2150 mm		
"60" + "60"	2600 mm	2 elements	2 rails and angle archi- traves 200 cm-long
"60" + "70"	2800 mm	2 elements	

length of rail cover	length of rail cover	number of rail cover elements	number of rails and angle architraves
"70" + "70" or "60" + "80"	3000 mm		
"70" + "80" or "60" + "90"	3200 mm		
"80" + "80" or "70" + "90" or "60" + "100"	3400 mm		2 1
"80" + "90" or "70" + "100"	3600 mm	2 elements	2 rails and angle architraves 200 cm-long
"90" + "90" or "80" + "100"	3800 mm		
"90" + "100"	4000 mm		
"100" + "100"	4200 mm		3 rails and angle architraves 200 cm-long














Rail cover dimensions:





soft-close hardware for sliding door



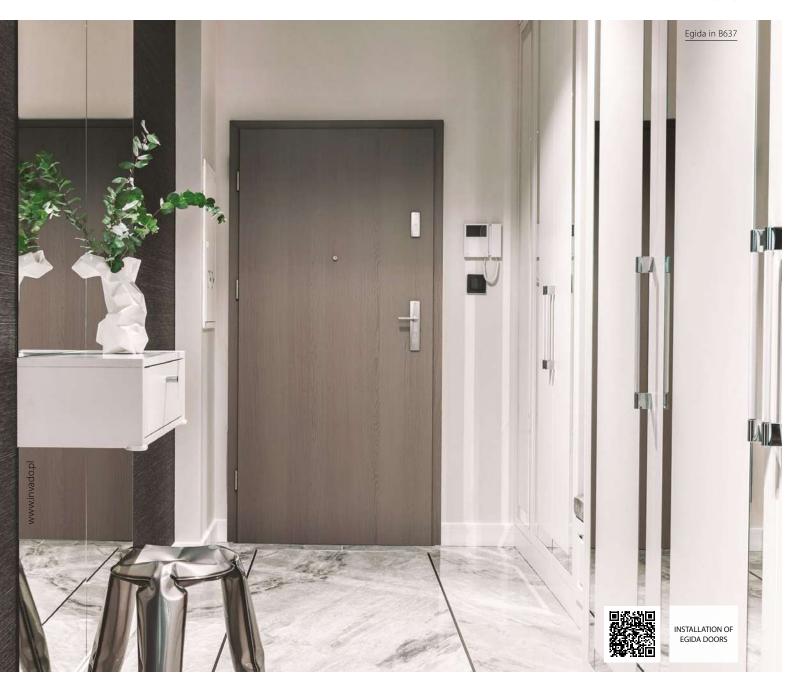

DOOR LEAVES OPTIONS

EGIDA door has burglary resistance (RC 2) only when purchased with a complete dedicated set, which includes a door leaf with a door frame, a threshold, a handle with an escutcheon in min. class 2, and a cylinder insert in min. class 4.



DECORS







2



CONSTRUCTION

- 1 frame is made of plywood
- filling element: tubular chipboard
- frame with filling is covered with HDF boards on both sides 4 door leaf covered with ENDURO foil or ECO-VENEER
- door leaf thickness: 40 mm
- cut edges (90°) of the door leaf (more info on p. 122)
- width of single doors: "80"-"100"

ADDITIONAL OPTIONS

- handle + QUEBECK shield—anti-burglary resistance class II (color INOX and TITAN)
- handle + ROYAL shield—anti-burglary resistance class III (color INOX)
- set of WILKA cylinder lock inserts (insert + insert with a knob), ANTI-BURGLARY resistance class 2, 30 x 40 mm, 6 keys
- · panoramic viewfinder

3

• automatic door bottom seal for doors "80"-"100"

NOTE: automatic bottom door seal is not applicable for doors with fixed threshold, therefore it is not included in the set.

STANDARD EQUIPMENT

- multipoint strip lock with 3 security bolts
- 3 reinforced hinges + 3 anti-burglary pins
- acoustic insulation Rw = 29 dB (acoustic insulation class Rw = 27 dB)
- ANTI-BURGLARY resistance class RC2
- fixed aluminium threshold



DIMENSIONS

			den door f (OBA] (mn			tal door fra (OBM] (mr		
		"80"	"90"	"100"	"80"	"90"	"100"	
s1	door leaf width	844	944	1044	844	944	1044	
s2	width of the wall opening	920	1020	1120	890	990	1090	
s3	outer width of the door frame	890	990	1090	880	980	1080	
s4	internal width of the door frame	802	902	1002	800	900	1000	
s5	width of the door frame with architraves				906	1006	1106	
h1	door leaf height	2040 (F	PL) / 1988 (CZ-SK)		2040 (PL)		
h2	internal height of the door frame	2084 (F	PL) / 2030 (CZ-SK)		2070 (PL)		
h3	outer height of the door frame	2069 (F	PL) / 2015 (CZ-SK)		2064 (PL)		
h4	internal height of the door frame	2025 (F	PL) / 1971 (CZ-SK)		2024 (PL)		
h5	height of the door frame with architraves					2077 (PL)		


DEDICATED DOOR FRAMES

 $\textbf{[KOBA]} - \textbf{block door frame: } 90 \times 44 \text{ mm made of plywood covered with MDF board} - \textbf{width "80"-"} 100"$

[KOBM]—metal door frame in RAL color: available as standard in brown color (8017) other colors—honey (8003), white (9010), beige (1001) and grey (7047)*—width "80"-"100"

*ATTENTION: Metal door frame in non-standard decors are available per request with longer production time.



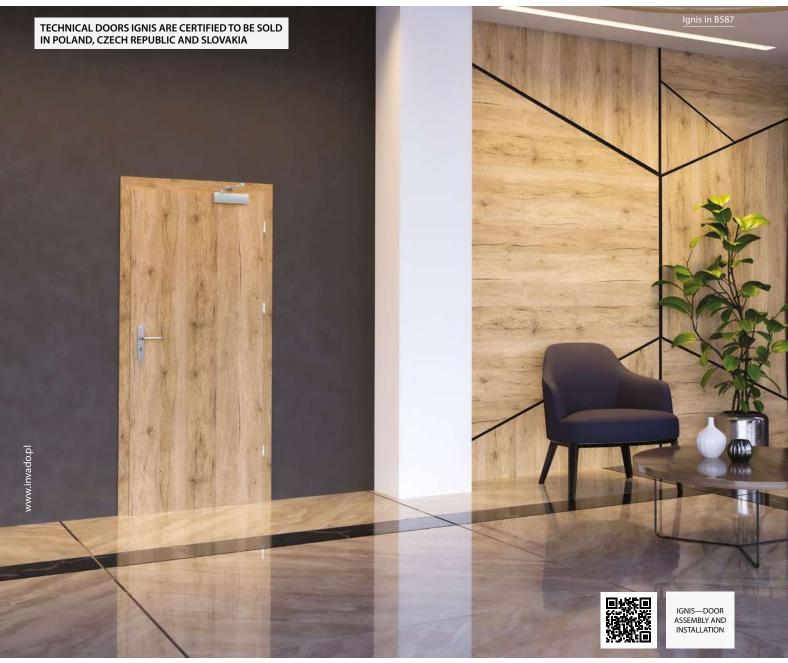

Ignis fire doors are flush, rebated, and single door leaves with fire resistance **El₂ 30.** The door frame is made of non-flammable chipboard. The door leaf and the door frame can be installed in a firm fixing structure with minimal thickness 115 mm and minimal density 575 kg/m³, according to **PN-EN 13501-2:2016-07.** It is acceptable to mount the object in a structure that consists of:

- pillar profiles with nominal density from 40 to 55 mm,
- a type F plasterboard on each side, each 12.5 mm thick, mineral wool 40-50 mm thick and with density 30-60 kg/m³.

DOOR LEAVES OPTIONS









DECORS











CONSTRUCTION

- 1 frame: laminated pinewood
- filling: mineral wool
 frame with filling is covered with HDF
- boards on both sidesdoor leaf covered with ENDURO foil or ECO-VENEER
 - door leaf thickness: 40 mm
- cut edges (90°) of the door leaf (more info on p. 122)
- width of single doors: "60"-"100"

Fire doors should be a subject of technical inspections and maintenance operations in accordance with the rules set out in the applicable standards and regulations on fire-resistance doors. Technical and maintenance inspections should be carried out at least once a year.

ADDITIONAL OPTIONS

door leaf width "100"

2

3

4

STANDARD EQUIPMENT

- set of intumescent seals
- · latch-bolt lock
- 3 screw-in pivot hinges

DIMENSIONS

		"60"	"70"	"80"	"90"	"100" (PL)
s1	door leaf width	644	744	844	944	1044
s2	width of the wall opening	696	796	896	996	1096
s3	outer width of the door frame	666	766	866	966	1066
s4	internal width of the door frame	600	700	800	900	1000
s5	width of the door frame with architraves	744	844	944	1044	1144
h1	door leaf height		2042 (P	L) / 1987	(CZ-SK)	
h2	internal height of the door frame		2062 (P	L) / 2007	(CZ-SK)	
h3	outer height of the door frame		2047 (P	L) / 1992	(CZ-SK)	
h4	internal height of the door frame		2025 (P	L) / 1970	(CZ-SK)	
h5	height of the door frame with architraves		2097 (P	L) / 2042	(CZ-SK)	

ONLY SOLD TOGETHER WITH

- cylinder lock insert
- self-closer
- UNO door handle





DEDICATED DOOR FRAMES

IGNIS LEAVES ARE SOLD ONLY WITH THE ORS1/E WOODEN DOOR FRAME—adjustable, made of non-flammable chipboard

symbol	В	С	D	E	F	G	Н	1
wall thickness	100-119	120-139	140-159	160-179	180-199	200-219	220-239	240-259
symbol	J	К	L	M	N	0	F	•

wooden interior entrance doors of HALSPAN system



APPLICATION:

Halspan system doors are intended for use in residential and public buildings as interior doors to the extent resulting from their performance characteristics set out in point 3 of the National Technical Assessment ITB-KOT-2018/0407, 1st edition. The doors have a NATIONAL CERTIFICATE OF STABLE PERFORMANCE No. AC 158-UWB-W1355.

Acoustic insulation index for GUARDIA El₂30 i El₂60:

Rw=32 db—Single door leaves El₂30 and El₂60 Rw=32 db—Double door leaf El₂60

Rw=27 db—Double door leaf El₂30

Fire resistance: El₂30 (30 min), El₂60 (60 min)

DOOR LEAVES OPTIONS
















DECORS



















Fire doors should be a subject of technical inspections and maintenance operations in accordance with the rules set out in the applicable standards and regulations on fire-resistance doors. Technical and maintenance inspections should be carried out at least once a year.

The doorset is supplied with:

- a cylinder insert according to requirements of PN-EN 1303: 2015-07,
- a self-closer according to requirements of PN-EN 1154: 1999 / AC: 2010P,
- a complete door handle according to requirements of PN-EN 1906: 2012,
- a closing sequence controller according to requirements of PN-EN 1158: 1999 / AC: 2006P (for double doors only).

NOTE: the seller is obligated to sell technical doors equipped with above elements (at extra charge)

2









automatic bottom door seal

CONSTRUCTION

- 1 coating: finger joint pinewood
- 2 filling: fireproof chipboard
- frame with filling is covered with HDF boards on both sides
- 4 door leaf covered with ENDURO foil or ECO-VENEER
- door leaf thickness: El, 30—50 mm / El, 60—60 mm
- cut edges (90°) of the door leaf (more info on p. 122)
- width of single doors: "70"-"100"
- width of double doors: "140"-"200"

ADDITIONAL OPTIONS viewfinder smoke protection set of 8 mounting screws with 6

3

set of 8 mounting screws with expansion sleeves in sizes 10/152 for brick walls

viewfinde

STANDARD EQUIPMENT

- · cylinder lock insert
- 4 hinges with regulation
- · intumescent seals
- · automatic bottom door seal

NOTE: automatic bottom door seal is not applicable for doors with fixed threshold

ONLY SOLD TOGETHER WITH

- · cylinder lock
- · UNO door handle
- door closer meeting the requirements of PN-EN 1154:1999/AC:2010P (single door)
- closing sequence controller (double door)
- TS5000 door closer meeting the requirements of PN-EN 1154:1999/AC:2010P (single door with smoke protection)

NOTE: the seller's obligation is to sell technical doors equipped with the above elements

DIMENSIONS

	single door (mm)				double door* (mm)						
	"70"	"80"	"90" **	"100"	"140"	"150"	"160"	"170"	"180"	"190"	"200"
door leaf width	748	848	964	1048	1487	1587	1687	1787	1887	1987	2087
width of the wall opening	856	956	1072	1156	1595	1695	1795	1895	1995	2095	2195
outer width of the door frame	826	926	1042	1126	1565	1665	1765	1865	1965	2065	2165
internal width of the door frame	706	806	922	1006	1445	1545	1645	1745	1845	1945	2045
door leaf height		2	2040					2040			
internal height of the door frame		2	2100		2100						
outer height of the door frame		2084			2084						
internal height of the door frame		2	2024					2024			
	width of the wall opening outer width of the door frame internal width of the door frame door leaf height internal height of the door frame outer height of the door frame	door leaf width 748 width of the wall opening 856 outer width of the door frame 826 internal width of the door frame 706 door leaf height internal height of the door frame outer height of the door frame	door leaf width 748 848 width of the wall opening 856 956 outer width of the door frame 826 926 internal width of the door frame 706 806 door leaf height internal height of the door frame 22 outer height of the door frame 23	"70" "80" "90"** door leaf width 748 848 964 width of the wall opening 856 956 1072 outer width of the door frame 826 926 1042 internal width of the door frame 706 806 922 door leaf height 2040 internal height of the door frame 2100 outer height of the door frame 2084	"70" "80" "90"*** "100" door leaf width 748 848 964 1048 width of the wall opening 856 956 1072 1156 outer width of the door frame 826 926 1042 1126 internal width of the door frame 706 806 922 1006 door leaf height 2040 internal height of the door frame 2100 outer height of the door frame 2084	"70" "80" "90"** "100" "140" door leaf width 748 848 964 1048 1487 width of the wall opening 856 956 1072 1156 1595 outer width of the door frame 826 926 1042 1126 1565 internal width of the door frame 706 806 922 1006 1445 door leaf height 2040 2100 2000 1000	"70" "80" "90"** "100" "140" "150" door leaf width 748 848 964 1048 1487 1587 width of the wall opening 856 956 1072 1156 1595 1695 outer width of the door frame 826 926 1042 1126 1565 1665 internal width of the door frame 706 806 922 1006 1445 1545 door leaf height 2040 internal height of the door frame 2100 outer height of the door frame 2084	"70" "80" "90"** "100" "140" "150" "160" door leaf width 748 848 964 1048 1487 1587 1687 width of the wall opening 856 956 1072 1156 1595 1695 1795 outer width of the door frame 826 926 1042 1126 1565 1665 1765 internal width of the door frame 706 806 922 1006 1445 1545 1645 door leaf height 2040 2040 1006	"70" "80" "90"*** "100" "140" "150" "160" "170" door leaf width 748 848 964 1048 1487 1587 1687 1787 width of the wall opening 856 956 1072 1156 1595 1695 1795 1895 outer width of the door frame 826 926 1042 1126 1565 1665 1765 1865 internal width of the door frame 706 806 922 1006 1445 1545 1645 1745 door leaf height 2040 2040 2040 2040 2040 internal height of the door frame 2100 2084 2084 2084	"70" "80" "90"** "100" "140" "150" "160" "170" "180" door leaf width 748 848 964 1048 1487 1587 1687 1787 1887 width of the wall opening 856 956 1072 1156 1595 1695 1795 1895 1995 outer width of the door frame 826 926 1042 1126 1565 1665 1765 1865 1965 internal width of the door frame 706 806 922 1006 1445 1545 1645 1745 1845 door leaf height 2040 2040 2040 2040 internal height of the door frame 2100 2100 2100 outer height of the door frame 2084 2084 2084	"70" "80" "90"*** "100" "140" "150" "160" "170" "180" "190" door leaf width 748 848 964 1048 1487 1587 1687 1787 1887 1987 width of the wall opening 856 956 1072 1156 1595 1695 1795 1895 1995 2095 outer width of the door frame 826 926 1042 1126 1565 1665 1765 1865 1965 2065 internal width of the door frame 706 806 922 1006 1445 1545 1645 1745 1845 1945 door leaf height 2040<

^{*} Internal width of the door frame for double door 90+90 after opening the active door leaf at an angle of 90° is at least 900 mm, so the passive door leaf is narrower. The door set is asymmetric regarding widths of both door leaves.

DEDICATED DOOR FRAME



[KOBP] block door frame 124 x 60 mm made of finger-joint pinewood


standard—no extra charge

ADDITIONAL OPTIONS AT EXTRA CHARGE FOR BLOCK DOOR FRAME

- covering profile (architrave LO1)—"70"–"100"
- quadrant LC1—"70"-"100"
- · angle architrave
- enlarging element—100 mm, 200 mm, 300 mm

^{**} Internal width of the door frame after opening the door leaf at an angle of 90° is at least 900 mm


DIMENSIONS OF REBATED, NON-REBATED AND SLIDING DOORS

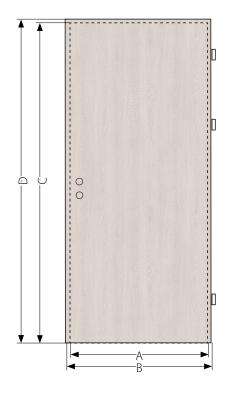

	"60"	"70"	"80"	"90"	"100"
A	618	718	818	918	1018
В	644	744	844	944	1044
С		202	7 (PL) / 1975 (CZ -	SK)	
D		204	0 (PL) / 1988 (CZ -	SK)	

Dimensions $\bf A$ and $\bf C$ are outer dimensions of non-rebated doors; Dimensions $\bf B$ and $\bf D$ are outer dimensions of rebated doors and doors prepared for sliding systems.

A REBATE AND A COUNTER-REBATE IN DOUBLE DOOR LEAVES

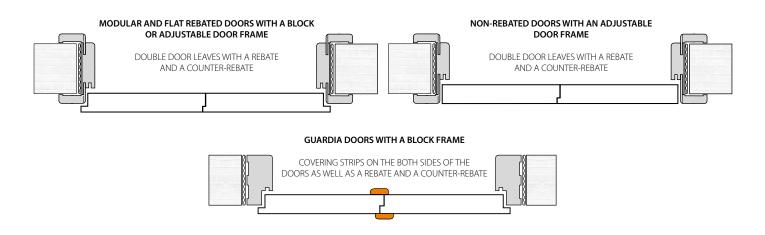

ROUNDED VERTICAL AND UPPER EDGES IN DOOR LEAVES

DOORS	SW	ING	CLIDING CVCTEMS	EDGE FROM THE CONTACT
DOORS	REBATED	NON-REBATED	SLIDING SYSTEMS	SIDE OF DOUBLE DOOR
MODULAR DOORS	YES	YES	YES	YES
FLAT DOORS	YES		NO	NO
FLAT DOORS (MODERN AND OPTIMO LINE)	NO	NO	NO	NO
FOLDING DOORS	YES*			
EGIDA	NO			
GUARDIA	NO			NO
IGNIS	NO			
* OUTER VERTICAL EDGES ONLY.				



VENTILATION

According to the norm, the door to the bathroom, shower, and separate WC should open outwards, have a passage width of at least 0.8 m and height of 2 m, and have ventilation holes for the air supply in the bottom of the door with total ventilation area of at least 0.022 m². The total ventilation area is the sum of the gap under the door (standard 7 mm) and additional solutions that increase the total net ventilation area such as ventilation sleeves, ventilation undercut, and ventilation grid. The use of a ventilation grid ensures the correct ventilation area for all door widths, while using the sleeve and/or undercut the increased gap between the door and the floor should be used to meet the required regulations. If the regulations mentioned above must be obliged, the clients must trim the door on their own.



VENTILATION UNDERCUT (visualization for door leaf width "80")



VENTILATION SLEEVES (visualization for door leaf width "80")



(visualization for door leaf width "80")



(visualization for door leaf width "80")



METAL VENTILATION SLEEVES, SQUARE (chrome, nickel)







VENTILATION GRID (Norma Decor, variety of colours)

door width	number of ventilation sleeves	door leaf with metal ventilation sleeves	door leaf with PVC ventilation sleeves for foiled doors	door leaf with PVC ventilation sleeves for modular doors	total ventilation area: ventilation undercut and the gap under	total ventilation area: ventilation grid and the gap under
	siceves	total ventilation area	: ventilation sleeves and the gap	under the door (7 mm) [m2]	the door (7 mm) [m²]	the door (7 mm) [m²]
"60"	3	0.0069	0.0062	0.0056	0.00835	
"70"	4	0.0085	0.0075	0.0067	0.01085	
"80"	5	0.0101	0.0089	0.0079	0.01335	> 0.022
"90"	6	0.0117	0.0103	0.0090	0.01585	
"100"	6	0.0124	0.0110	0.0097	0.01835	

NOTE: THE D'ARTAGNAN DOOR LEAVES CANNOT BE USED WITH VENTILATION SLEEVES, UNDERCUTS AND GRIDS. THE SLIDING LEAVES MEET THE VENTILATION REQUIREMENT DUE TO THE SYSTEM CONSTRUCTION. INVADO DOES NOT MAKE SEVERAL VENTILATION SOLUTIONS AT THE SAME TIME.

GUIDELINES FOR BUILDINGS EOUIPPED WITH A RECUPERATION SYSTEM

To ensure adequate airflow from the living areas to the corridor, sanitary, and auxiliary rooms, it is recommended that all internal doors should have a gap at the bottom. The gap area in doors in living and auxiliary rooms should be at least 80 cm² (INVADO doors with an undercut fully meet this requirement). The size of the ventilation gap in doors in sanitary rooms should be 200 cm².

DOOR FRAMES



Block door frame

FOR REBATED DOORS [OB3]









HINGE



CAPS FOR HINGES

CONSTRUCTION

- MDF board
- · foiling—all decors available in the INVADO offer
- cross-section: 90 x 44 mm


DOOR FRAME FOR DOOR LEAVES IN WIDTH

- width of single doors "60" to "100"
- width of double doors "120" to "200"


OPTIONS AT EXTRA CHARGE FOR BLOCK DOOR FRAMES


- flat architrave LO1 60 x 10 mm "60"-"100"
- flat architrave LO7 80 x 16 mm "60"-"100"
- quadrant LC1 (single doors) or LC2 (double doors)
- door frames with sidelights and transoms (without glass) with circumference up to 5 l.m
- · door frames for double doors
- additional hinge in door frame "60"-"80"

APPLICATION OF QUADRANT LC2 AND ARCHITRAVE LO1, AND THEIR COVERING SURFACES



COVERING TRIMS (LO1)
AND QUADRANT (LC1)
CAN BE APPLIED TO
A BLOCK DOOR FRAME FOR
DOOR LEAVES IN WIDTHS
"60"-"90". IN CASE OF
DOOR LEAVES IN WIDTH
"100", YOU HAVE TO ORDER
DOUBLE COVERING TRIM
(LO2) OR DOUBLE QUADRANT (LC2).





DIMENSIONS

			width of	f single do	ors (mm)		width of double doors (mm)—ATTENTION: CHANGE OF DIMENSIONS								
		"60"	"70"	"80"	"90"	"100"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"	"200"
s1	door leaf width	644	744	844	944	1044	1278	1378	1478	1578	1678	1778	1878	1978	2078
s2	width of the wall opening	718	818	918	1018	1118	1354	1454	1554	1654	1754	1854	1954	2054	2154
s3	outer width of the door frame	688	788	888	988	1088	1324	1424	1524	1624	1724	1824	1924	2024	2124
s4	internal width of the door frame	600	700	800	900	1000	1236	1336	1436	1536	1636	1736	1836	1936	2036
h1	door leaf height						20	40 (PL) / 1	1988 (CZ-S	SK)					

h2	height of the wall opening	2084 (PL) / 2030 (CZ-SK)
h3	outer height of the door frame	2069 (PL) / 2015 (CZ-SK)
h4	internal height of the door frame	2025 (PL) / 1971 (CZ-SK)

Adjustable door frame FOR REBATED DOORS [ORS1 / ORS8]













CONSTRUCTION

- · MDF board
- · foiling—all decors available in the INVADO offer
- the standard adjustable door frame consists of a central element plus 2 sets of angle architraves joined at 45°. A standard angle architrave consists of a flat architrave 60 mm-wide and a "tongue" 30 mm-long. It is possible to separately order a set of angle architraves 80 mm-wide and/or a set of angle architraves 80 mm-wide with a "tongue" 50 mm-long (see table of options at extra charge).

DOOR FRAME FOR DOOR LEAVES IN WIDTH

- width of single doors "60" to "100"
- width of double doors "120" to "200"

OPTIONS AT EXTRA CHARGE

- door frames with sidelights and transoms (without glass) with circumference up to 5 l.m
- door frames for double doors
- additional hinge in door frame "60"-"80"
- standard angle architrave (a "tongue" 30 mm-long, an architrave 60 or 80 mm-wide)
- angle architrave with longer "tongue" (a "tongue" 50 mm-long, an architrave 60 or 80 mm-wide)
- wall framing ("blind door frame")

RANGES OF WALL THICKNESS COVERING









The adjustable door frame is made in dimensions adjustable to the wall thickness in steps of 20 mm. The minimum wall thickness is 75 mm

NOTE: due to special mills, there is a possibility to trim the frame and reduce the wall thickness coverage by 15 mm. Door frame for wall thickness greater than 360 mm consists of at least two connected components.





DIMENSIONS

				width of	f single do	ors (mm)		width of double doors (mm)—ATTENTION: CHANGE OF DIMENSIONS								
			"60"	"70"	"80"	"90"	"100"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"	"200"
s1	door leaf width		644	744	844	944	1044	1278	1378	1478	1578	1678	1778	1878	1978	2078
s2	width of the wall o	pening	674	774	874	974	1074	1310	1410	1510	1610	1710	1810	1910	2010	2110
s3	outer width of the	door frame	644	744	844	944	1044	1280	1380	1480	1580	1680	1780	1880	1980	2080
s4	internal width of th	ne door frame	600	700	800	900	1000	1236	1336	1436	1536	1636	1736	1836	1936	2036
	width of the	60 mm [ORS1]	744	844	944	1044	1144	1380	1480	1580	1680	1780	1880	1980	2080	2180
s5	door frame with architraves	80 mm [ORS8]	784	884	984	1084	1184	1420	1520	1620	1720	1820	1920	2020	2120	2220
h1	door leaf height							20	40 (PL) / 1	988 (CZ-	SK)					
h2	height of wall oper	ning						20	62 (PL) / 2	2008 (CZ-	SK)					
h3	outer height of the	door frame						20	47 (PL) / 1	993 (CZ-	SK)					
h4	internal height of th	he door frame						20)25 (PL) / 1	1971 (CZ- :	SK)					
L C	height of the	60 mm [ORS1]						20	97 (PL) / 2	2043 (CZ-	SK)					
h5	door frame with architraves	80 mm [ORS8]						21	17 (PL) / 2	2063 (CZ-	SK)					

NOMINAL COVERAGE OF THE WALL

*It is possible to order adjustable door frame thicker than 499 mm—for this purpose please contact with INVADO's commercial department

symbol	Α	В	С	D	E	F	G	н	1		J
wall thickness	75-94	95-114	120-139	140-159	160-179	180-199	200-219	220-239	240-259	260	-279
symbol	K	L	М	N	0	P	Q	R	S	т	U

Adjustable door frame for non-rebated doors [ORS7 / ORS10]







CONSTRUCTION

- MDF board
- foiling—all decors available in the INVADO offer
- the standard adjustable door frame consists of a central element plus 2 sets of angle architraves joined at 45° (ORS7 i ORS10) or 90° (ORS4). A standard angle architrave consists of a flat architrave 60 mm-wide and a "tongue" 30 mm-long. It is possible to separately order a set of angle architraves 80 mm-wide and/or a set of angle architraves 80 mm-wide with a "tongue" 50 mm-long (see table of options at extra charge).

DOOR FRAME FOR DOOR LEAVES IN WIDTH

- width of single doors "60" to "100"
- width of double doors "120" to "200"

OPTIONS AT EXTRA CHARGE

- door frames with sidelights and transoms (without glass) with circumference up to 5 l.m
- door frames for double doors
- additional hinge in door frame
- standard angle architrave (a "tongue" 30 mm-long, an architrave 60 or 80 mm-wide)
- angle architrave with longer "tongue" (a "tongue" 50 mm-long, an architrave 60 or 80 mm-wide)

RANGES OF WALL THICKNESS COVERING





DOOR FRAME WIDTH MODIFICATION



The adjustable door frame is made in dimensions adjustable to the wall thickness in steps of 20 mm. The minimum wall thickness is 75 mm.

NOTE: for wall thickness between 75-85, it is required to use wall frame A(75-94). In this case, the angle architrave should be trimmed where the mills are located—otherwise, the door frame won't be properly aligned with the wall. Door frames for a wall thickness greater than 360 mm consist of at least two connected elements.





DIMENSIONS width of single doors (mm)								width of double doors (mm)								
			"100"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"	"200"				
s1	door leaf width		618	718	818	918	1018	1239	1339	1439	1539	1639	1739	1839	1939	2039
s2	width of the wall o	pening	674	774	874	974	1074	1294	1394	1494	1594	1694	1794	1894	1994	2094
s3	outer width of the	door frame	644	744	844	944	1044	1264	1364	1464	1564	1664	1764	1864	1964	2064
s4	internal width of th	ne door frame	600	700	800	900	1000	1220	1320	1420	1520	1620	1720	1820	1920	2020
	width of the	60 mm [ORS7]	744	844	944	1044	1144	1364	1464	1564	1664	1764	1864	1964	2064	2164
s5	door frame with	80 mm [ORS10]	704	004	004	1001	1101	1.10.1	1504	1.504	1701	1001	1001	2004	2404	2204
	architraves	80 mm [ORS4]	784	884	984	1084	1184	1404	1504	1604	1704	1804	1904	2004	2104	2204
h1	door leaf height							20	27 (PL) / 1	1975 (CZ-	SK)					
h2	height of wall oper	ning						20	62 (PL) / 2	2008 (CZ-	SK)					
h3	outer height of the	door frame						20	47 (PL) / 1	1993 (CZ-	SK)					
h4	internal height of t	he door frame						20)25 (PL) /	1971 (CZ- :	SK)					
	height of the	60 mm [ORS7]						20	97 (PL) / 2	2043 (CZ-	SK)					
h5	door frame with	80 mm [ORS10]	2097 (PL) / 2043 (CZ-SK)													
	architraves	80 mm [ORS4]						21	1/ (PL) / 2	2063 (CZ- 5	oK)					

NOMINAL COVERAGE OF THE WALL

*It is possible to order adjustable door frame thicker than 499 mm—for this purpose please contact with INVADO's commercial department


symbol	Α	В	c	D	E	F	G	н	1		J
wall thickness	75-94	95-114	120-139	140-159	160-179	180-199	200-219	220-239	240-259	260	-279
symbol	K	L	М	N	0	P	Q	R	S	т	U


Metal door frames

METAL DOOR FRAME (BIG) [FD 11 / FD 12]





Covering assembly:











CONSTRUCTION

- · welded frame
- ungalvanized plate with a thickness of 1.2 mm
- powder-coated frame in a choice of standard RAL colours
- 2 hinges in colour white zinc and a seal included
- universal mounting brackets for brick walls and plasterboard walls

DOOR FRAME FOR DOOR LEAVES IN WIDTH

- width of single doors "60" to "100"
- width of double doors "120" to "200"

RANGES OF WALL THICKNESS COVERING

- door frame FD 11—75 mm
- door frame FD 12—100 mm

DIMENSIONS

			sing	gle door (r	nm)		double door (mm)—ATTENTION: CHANGE OF DIMENSIONS								
	"60" "70" "80" "90" "100							"130"	"140"	"150"	"160"	"170"	"180"	"190"	"200"
s1	door leaf width	644	744	844	944	1044	1278	1378	1478	1578	1678	1778	1878	1978	2078
s2	width of the wall opening	670	770	870	970	1070	1306	1406	1506	1606	1706	1806	1906	2006	2106
s3	outer width of the door frame	696	796	896	996	1096	1332	1432	1532	1632	1732	1832	1932	2032	2132
s4	internal width of the door frame	600	700	800	900	1000	1236	1336	1436	1536	1636	1736	1836	1936	2036
h1	door leaf height							20)40						
h2	height of the wall opening							20)37						
h3	outer height of the door frame							20)72						
h4	internal height of the door frame							20)24						

AVAILABLE RAL DECORS




OPTIONS AT EXTRA CHARGE


- · reinforcement for the self-closer
- adapted for the electric door strike



METAL DOOR FRAME (SMALL) [FD 14]







CONSTRUCTION

- · welded frame
- ungalvanized plate with a thickness of 1.2 mm
- powder-coated frame in a choice of standard RAL colours
- 2 hinges in colour white zinc and a seal included
- universal mounting brackets for brick walls and plasterboard walls

DOOR FRAME FOR DOOR LEAVES IN WIDTH


- width of single doors "60" to "100"
- width of double doors "120" to "200"


DIMENSIONS

	single door (mm) (mm)							double door (mm)—ATTENTION: CHANGE OF DIMENSIONS								
		"60"	"70"	"80"	"90"	"100"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"	"200"	
s1	door leaf width	644	744	844	944	1044	1278	1378	1478	1578	1678	1778	1878	1978	2078	
s2	width of the wall opening	661	761	861	961	1061	1297	1397	1497	1597	1697	1797	1897	1997	2097	
s3	souter width of the door frame	696	796	896	996	1096	1332	1432	1532	1632	1732	1832	1932	2032	2132	
s4	internal width of the door frame	600	700	800	900	1000	1236	1336	1436	1536	1636	1736	1836	1936	2036	
h1	door leaf height							20	140							
h2	height of the wall opening							20	38							
h3	outer height of the door frame							20	172							
h4	internal height of the door frame							20	24							

ADJUSTABLE METAL DOOR FRAME [FD 61-67]







CONSTRUCTION

- 2-part frame, adjustable (adjustment range in 30 mm steps)
- ungalvanized plate with a thickness of 1.5 mm
- powder-coated frame in a choice of standard RAL colours
- 3 hinges in colour white zinc and a seal included
- universal mounting brackets for brick walls and plasterboard walls

DOOR FRAME FOR DOOR LEAVES IN WIDTH

- width of single doors "60" to "100"
- width of double doors "120" to "200"

DIMENSIO	NS
----------	----

DIMENSIONS		single door (mm)					double door (mm)—ATTENTION: CHANGE OF DIMENSIONS								
		"60"	"70"	"80"	"90"	"100"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"	"200"
s1	door leaf width	644	744	844	944	1044	1278	1378	1478	1578	1678	1778	1878	1978	2078
s2	width of the wall opening	683	783	883	983	1083	1316	1416	1516	1616	1716	1816	1916	2016	2116
s3	outer width of the door frame	716	816	916	1016	1116	1350	1450	1550	1650	1750	1850	1950	2050	2150
s4	internal width of the door frame	600	700	800	900	1000	1236	1336	1436	1536	1636	1736	1836	1936	2036
h1	door leaf height	2040													
h2	height of the wall opening	ng 2065													
h3	outer height of the door frame	he door frame 2082													
h4	internal height of the door frame	ternal height of the door frame 2024													









NOTE: It's possible to paint the SARA-PRO door frame with a wall paint after previously coating it with a primer paint included in the package.

CPL 0,15 MM · · · ·



B687
alpine white















CONSTRUCTION

- the frame is made of an MDF board
- board prepared for painting and wallpapering
- filling—"honeycomb" or tubular chipboard (optionally)
- frame with filling is covered with HDF boards on both sides
- width of single doors "60"-"90"

STANDARD EQUIPMENT

- 2 hidden hinges
- magnetic lock for a standard key, a WC knob or a cylinder lock insert

ADDITIONAL OPTIONS

· door without a keyhole


no extra charge

- · ventilation undercut
- PVC ventilation sleeves
- cylinder lock insert 31/36
- filling—tubular chipboard
- automatic door bottom seal for door width "60"-"90"
- · ventilation grid


DIMENSIONS OF A DOOR LEAF AND CONCEALED DOOR FRAME

			inner door	frame (mm)		outer door frame (mm)					
		"60"	"70"	"80"	"90"	"60"	"70"	"80"	"90"		
s1	door leaf width	618	718	818	918	618	718	818	918		
s2	width of the wall opening	698	798	898	998	698	798	898	998		
s3	outer width of the door frame	688	788	888	988	688	788	888	988		
s4	internal width of the door frame	603	703	803	903	603	703	803	903		
h1	door leaf height		2027 (PL) / 1	975 (CZ-SK)		2017 (PL) / 1965 (CZ-SK)					
h2	height of the wall opening		2076 (PL) / 2	2024 (CZ-SK)		2066 (PL) / 2014 (CZ-SK)					
h3	outer height of the door frame		2069 (PL) / 2	2017 (CZ-SK)		2059 (PL) / 2007 (CZ-SK)					
h4	internal height of the door frame		2027 (PL) / 1	975 (CZ-SK)		2017 (PL) / 1965 (CZ-SK)					

CONCEALED DOOR FRAME SARA-PRO—INNER

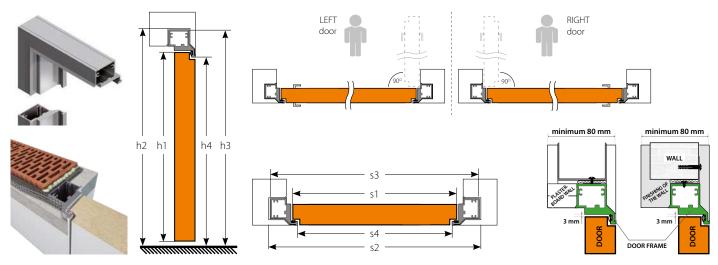

CONCEALED DOOR FRAME SARA-PRO-OUTER

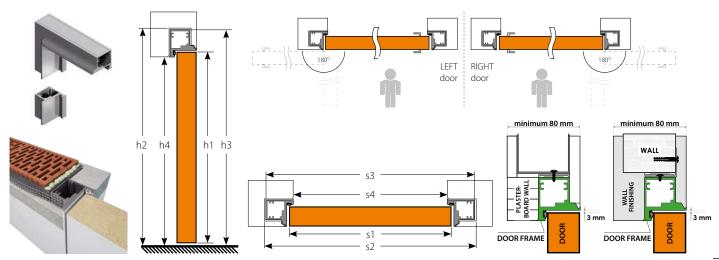


Housing system



FEATURES

Metal frame housing (covering) allows the installation of new doors in the rooms where metal frames were mounted following the Polish standard (regarding dimensions) without having to remove these frames. The advantage of this solution is an easy installation with mounting foam, without dirty floors and walls, and the ability to mount standard foiled INVADO door leaves.



WIDTH OF THE DOOR FRAME FOR DOOR LEAVES

• width of single doors "60" to "90"

INTERNAL DIMENSIONS OF METAL DOOR FRAME (MM)


		"60"	"70"	"80"	"90"			
s1	door leaf width	600	700	800	900			
h1	door leaf height	2025 (PL) / 1975 (CZ-SK)						

RANGES OF WALL THICKNESS

• 60–94, 95–129, 130–199, 200–269

Housing system for metal door frames for walls thicker than 130 mm has an additional enlarging element.

For the range of 130–199—the enlarging element is 85 mm-wide. For the range of 200–269—the enlarging element is 155 mm-wide.

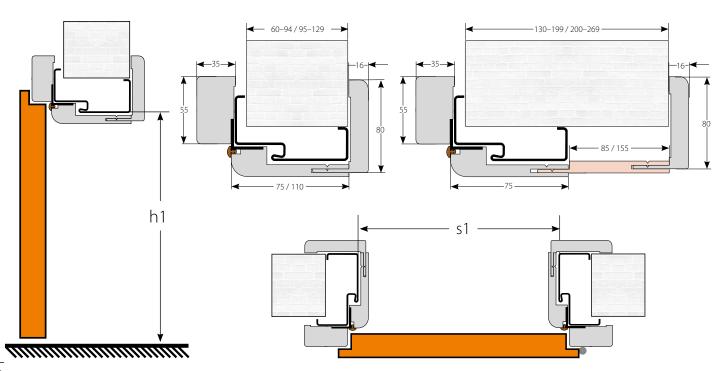



ACCESSORIES AND HANDLES



Accessories

FOILED AND MODULAR DOORS



caps for hinges (satinated chrome, chrome, black or golden) set for 1 piece of hinge



hinge



hidden hinge



cylinder lock insert




porthole (black or silver with satinated or transparent glass) included in the price of the door



automatic bottom door seal



aluminium threshold



door seal (black, white, gray, brown, beige)






ventilation sleeves metal round



ventilation sleeves metal square



ventilation grid

OPTIMO LINE



magnetic lock



adjustable strike plate



hidden hinges



than the door leaf surface (natural hamilton oak, alpine white or pure black)

surcharge for changing the colour of the fittings—set: 2 hinges + strike plate + door leaf lock


KICK AND PUSH METAL PANELS

- · material: polished stainless steel
- ventilation sleeves—diameter: 40 mm (depending on the width of the door leaf, a different number of ventilation sleeves are used: "60"—3 sleeves / "70"—4 sleeves / "80"—5 sleeves / "90"-"100"—6 sleeves)
- dimensions: width matched to the door leaf, height 300 mm, thickness 0.6 mm
- ventilation undercut—height: 15 mm;
- ventilation grid—dimensions: 430 x 110 mm.













PUSH top panel with handle holes

KICK bottom panel with ventilation undercut KICK bottom panel with ventilation sleeves KICK bottom panel with ventilation grid





BLACK IRONMONGERY FOR REBATED DOORS



black pivot hinge



black lock (key / WC / cylinder insert)



strike plate for the block door frame



for the adjustable door frame

SLIDING SYSTEMS



hook lock WC / key



grip with folding key and a thimble



grip with WC knob and a thimble



grip and



strike plate



soft-close hardware for sliding door



door seal



profiles and architraves



brush



rail cover



bumper

TECHNICAL DOORS





self-closer (Guardia / Ignis)



cylinder lock insert (Guardia / Ignis)



intumescent seals (Guardia)



cylinder lock insert with a WILKA knob



hinge with regulation (Guardia)



automatic bottom door seal (Guardia / Egida)




handle QUEBECK (TYTAN / INOX) (Egida)



panoramic viewfinder



handle ROYAL (INOX) (Egida)

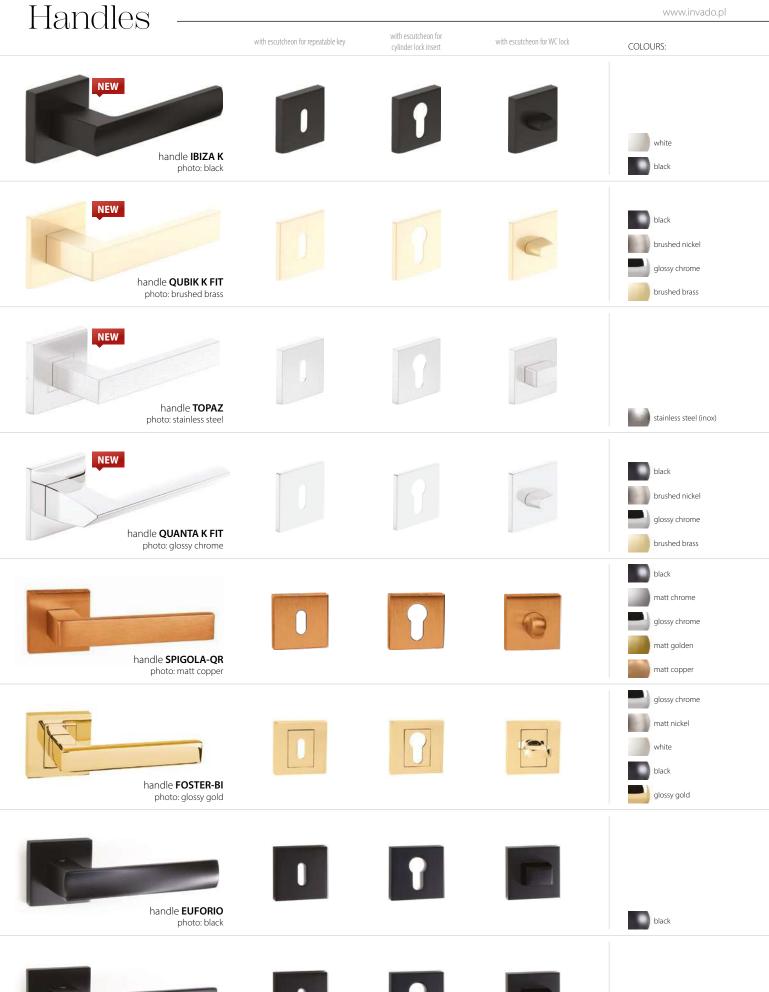

black

handle SPARK FIT

photo: black





with escutcheon for WC lock

COLOURS:









satinated nickel











matt chrome













satinated nickel/chrome anthracite/chrome

















photo: nickel/chrome

handle **UNO**





brown grafiatto











nickel/chrome











nickel/chrome











stainless steel (inox)









stainless steel (inox)







MODEL P124



MODEL P125



MODEL P127



ADDITIONAL OPTIONS


- finishing element 20 x 20 x 120 mm
- clips—30 pcs/package

NOTE: The length of a single skirting is 2.4 m. The skirtings are packed and sold in sets of 5. The prices below are for 1 pc.





MODEL P129 / P402 / P403

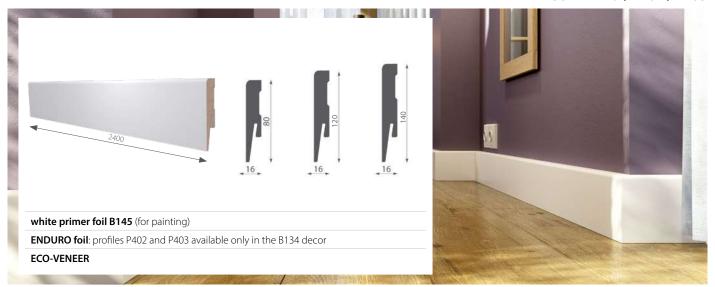

MODEL P130



MODEL P132





INVADO Ltd. Dzielna st. Leśna 2 42-793 Ciasna, Poland

e-mail: biuro@invado.pl tel. +48 34 351 05 40

invado.pl/en

BUYING AND INTERIOR DESIGN TIPS:


invado.pl/blog

facebook.com/invado

linkedin.com/company/invado-sp-z-o-o-instagram.com/invado.drzwi.otwieramy.marzenia



ONLINE CATALOGUE

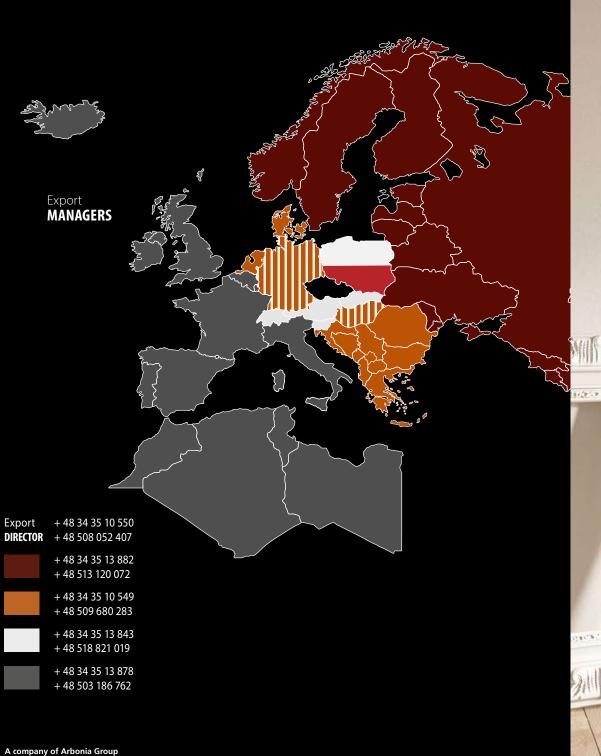



All information in the catalogue do not constitute an offer within the meaning of the Civil Code and are published for informational purposes only. Manufacturer reserves the right to make changes.

Notel Due to the printing technique the colors of the products presented in the catalogue may differ from the original. All rights reserved. Copying and publication of this catalogue on web sites and in other media without the written consent from INVADO Sp. z o.o. is prohibited.

Distributor's stamp:

Release date: 08.2023