





With your needs in mind.

Nowadays we live in a constant rush, trying to find peace, beauty, and a safe refuge at home and in the places where we live. A sense of security and harmony definitely improves everyday quality of life. INVADO understands and respects these needs. Being one of the most rapidly developing manufacturers of door joinery and skirting boards in Poland, we do our best to give you products that meet your needs, with high, individual aesthetics and the best possible functional features. INVADO is also a leading supplier of components for the furniture industry its market position is being built on the basis of over thirty years of experience and continuous investment in technology, people and quality improvement.







CERTIFICATES AND AWARDS:



CERTIFICATE RESOURCES SAVED

INVADO has obtained the international certificate in waste management and recycling issued by INTERSEROH zero waste solutions.



GOOD BRAND 2019 AND 2021

An independent group of experts has confirmed that the products signed with the INVADO logo can be described using such words as: quality, trust and reputation. These three guidelines decide which selected brands are among the renowed brands. We are proud and grateful for that and at the same time we would like to thank our Customers for trusting us by

choosing INVADO doors for your dream interiors, our Business Partners for the fruitful cooperation, recommendation, and support, and all our INVADO employees for building together a good brand at every stage of its creation.



CONSUMER'S LAUREL

INVADO brand has been recognized by Polish consumers and honored with the prestigious Consumer's Laurel emblem



voc

The VOC certification tests the emission of volatile organic compounds released from the facility and, depending on the results obtained, the tested sample is assigned a class, ranging from A+ (best) and C (worst). The possession of the VOC certificate confirms that the product

does not release harmful for health substances inside the house, such as formaldehyde and benzene, a carcinogenic elements that unfortunately are often contained in paints, and materials used on windows.



ISO 9001

The INVADO Company applies to the Quality Management System and fulfills requirements of: PN-EN ISO 9001 in scope of: designing, production and sale of furniture components and finishing profiles, interior doors made of wood and woodbased materials and technical doors.



FSC[®]

Control of Product Origin and environmental protection are the leading elements of INVADO's development strategy. This is confirmed by an international certificate issued by the Forest Stewardship Council[®] and obtained by the company in 2007

Ask for FSC[®] certified products in our range.









Quality above all

INVADO continually strives to ensure optimal quality of its products, taking into account our users' personal needs. Quality is paramount—it is the basic issue in the design phase and remains the common denominator for all production processes. ISO 9001 certificate provides such an approach to the issue of quality. All INVADO products meet European standards. The high level of products and services next to the price and delivery time is the Company's primary objective, ensuring its perception as a trusted partner.

INVADO Technology

Production of door leaves and door frames is the strongest point of our INVADO offer, therefore the implementation of innovative production technology of foiled doors (INVADO Technology) became a major breakthrough in the Company's activity. The most distinct feature of this technology is foiling surfaces without connecting foil on rebate edges. Because of this method the edge of a door leaf looks aesthetically clean and is also more resistant to damage. It's very unlikely to break off the foil because it ends in the inner corner of the rebate-invisible to the eye. "Technology of foiling flat doors in the mass production system" is in use since 2007 when it comes to all foiled doors. In addition—off-rebate foiling makes the INVADO doors the only ones on the market to have rounded edges, safe for both adults and children's hands. Nowadays, thanks to the innovative method of doors' production, INVADO is among the most technologically advanced companies in Europe.

Hygienic certificates

Certifications aim to prevent materials and products hazardous to health and life of its users to be introduced to the general use or limit the allowable scope and method of their application for the elimination of health risks. All INVADO products have hygienic certificates:

- interior door frames in natural veneer No. 48/322/49/2017
- interior door frames in artificial veneer No. 441/322/451/2017
- interior door leaves in natural veneer No. 46/322/47/2017
- interior door leaves in artificial veneer or flat lacquered No. 348/322/353/2020
- skirting boards in natural veneer No. 47/322/48/2017
- skirting boards in artificial veneer No. 256/322/261/2019

Technical Approvals and National Technical Assessments:

Technical Approvals (until the end of their term) and National Technical Assessments, issued by Building Research Institute, are decisions to grant use of building materials and products. In accordance with the Construction Products Act of 16 April 2004, as amended (unified text: Journal of Laws of 2016, item 1570), the products to which the Technical Approvals and National Technical Assessments relate, may be placed on the market and can be used in construction. INVADO Company assessed and verified the constancy of performance, made a national declaration of performance and labeled the products with a construction mark in accordance with applicable regulations. INVADO's Technical Approvals and National Technical Assessments:

- Interior flat and glass doors—ITB-KOT-2017/0313 edition 1;
- Modular interior doors-ITB-KOT-2017/0003 edition 1;
- Folding, swinging and sliding interior doors—ITB-KOT-2018/0296 edition 1;
- Adjustable door frames for interior doors-ITB-KOT-2019/1221 edition 1;
- Block door frames for interior doors OB3 type P-ITB-KOT-2017/0312 edition 1; Door frames SARA-PRO for interior doors-ITB-KOT-2019/1076 edition 1;
- Metal door frame—ITB-KOT-2021/2091 edition 1;
- .
- Housing system for metal frames-ITB-KOT-2019/1221 edition 1.











FSC


www.fsc.org

FSC* C005006

The mark of

responsible forestry

TABLE OF **CONTENTS**

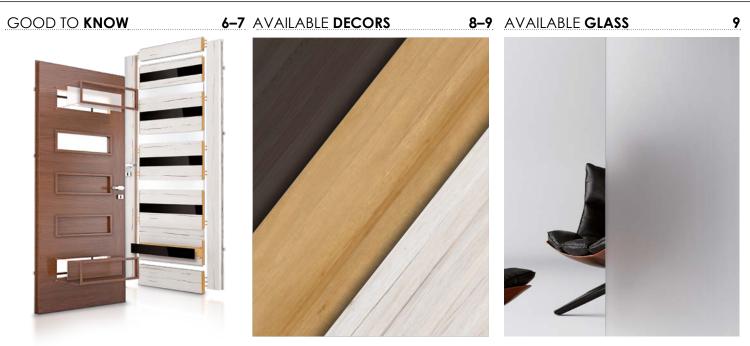

10–51

COLLECTION OF MODULAR DOORS

collection	12 Collection 12 ARTANO	collection AVERSA	ollection 14 MRROR	collection 1 LAGO	collection PASARO	collection VINADIO	2 FOSSANO 24
collection	collection 26 DESTINO UNICO	collection LIVATA	collection VERSANO	collection NOGARO	collection 34 TAMPARO	collection 36 LINEA FORTE	Collection 38 CAPENA INSERTO 40
collection	collection 42	collection 4	eolection LARINA	collection 48 D'ARTAGNAN	50		

4 www.invado.pl



COLLECTION OF FOILED DOORS



COLLECTION OF FOLDING DOORS



NORMA DECOR AND LIBRA

DOOR FRAMES



BLOCK DOOR FRAME	87
ADJUSTABLE DOOR FRAME	88
ADJUSTABLE DOOR FRAME FOR NON-REBATED DOORS	89
METAL FRAMES	90–91
CONCEALED DOOR FRAME SARA-PRO	92–93
HOUSING SYSTEM FOR METAL FRAME	94

SLIDING SYSTEMS




type of system
POCKET DOOR SLIDING SYSTEM WALL-MOUNTED SLIDING SYSTEM

HANDLES

80



TECHNICAL INFORMATIONS





SKIRTING BOARDS

84



5 ARBONIA 🎕 Group

98-99

GOOD TO KNOW

FOILED AND MODULAR DOORS:

FOILED DOORS

Visually, **foiled doors** are lighter than modular ones, which is combined with their stability. Construction: frame made of MDF board or finger joint pinewood. Filling: "honeycomb" or tubular chipboard, which is charged extra. The frame with filling is covered with a 3 mm-thick HDF board from both sides and wrapped with a decorative foil. For installation of filling elements in these doors, the glazing bars of different profiles are used.

MODULAR DOORS


Construction of **modular doors**: 2 vertical elements, upper and lower horizontal elements. Filling: MDF panels of different thickness or glass 4 mm-thick. For each model you can select a decorative foil. Glass and other filling elements in these door leaves are not installed using glazing bars, but with all the construction elements at once, which greatly improves their stability.






FOILS—TYPES OF WOOD TEXTURE (GRAINING):

Structures of INVADO foils can be divided into 3 categories:



UNIDIRECTIONAL FOIL WITH VERTICAL TEXTURE:

Most of INVADO foils is available in this type of texture. Exceptions: Chestnut (ENDURO), Italian oak and Severo oak (ENDURO 3D).



UNIDIRECTIONAL FOIL WITH HORIZONTAL TEXTURE:

Currently in INVADO offer there are two foils with this texture. These are: Italian oak and Severo oak (ENDURO 3D).




BIDIRECTIONAL FOIL WITH VERTICAL AND HORIZONTAL TEXTURE:

The combination of two previous types of texture. There is one foil of that type in the INVADO offer—Chestnut (ENDURO).

All 3 types of foils can be applied to foiled doors only. In case of modular doors, due to different construction, the texture direction of vertical and horizontal elements is different.




REBATED AND NON-REBATED DOORS:



The edge of a **rebated door** leaf is finished with a rebate (visible on the picture A1) that overlaps a door frame when the door is closed. Door leaves made this way do not fit flush with a door frame.

The edge of a **non-rebated door** leaf has no additional finishing, i.e. it has a flat surface. Door leaves made this way fit flush with a door frame (A2).

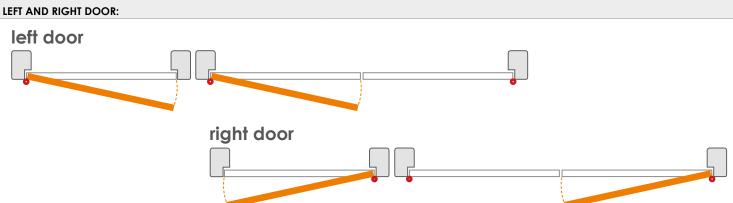

Before buying a door, it is worth considering which direction it should be opening in. For safety reasons, bathroom or kitchen door should be installed in a way that makes it possible to open it outwards. In other areas, it is dependent on the users' preference and the layout of the apartment or the house. The next step is to determine which door we are looking for: right or left. What does it mean? If the hinges are installed on the right side of a door frame, that means we need a right door, if the opposite—we have to select the left door. Therefore, before going to the store it is worth to reconsider this question and write down a list of needed right and left doors, and to determine the opening direction for each of them.

CALCULATION OF THE PRICE OF THE DOOR:


In most cases, the quoted prices are of a door leaf without a door frame or door handles. In order to obtain the full price of the door set, you have to use the following calculation:



AVAILABLE **DECORS**

ENDURO foil

ENDURO classification: Foil of high-quality design and very good imitation of a natural wood structure. High durability. **Intended for:** buildings and living quarters with a wide range of use.

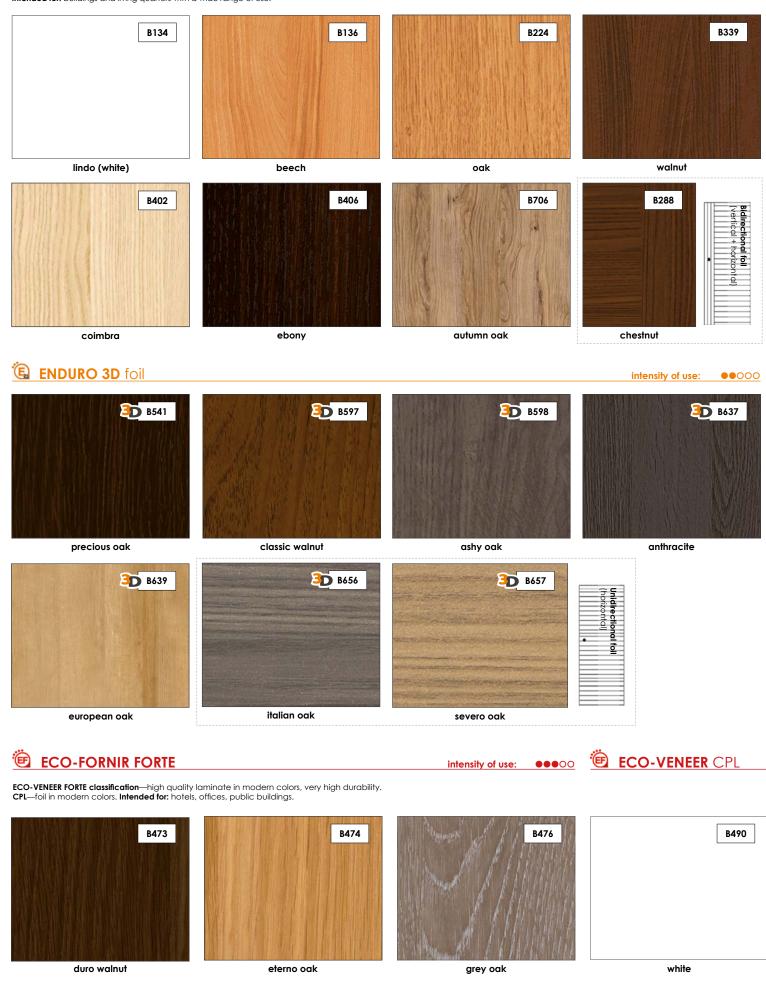

intensity of use: 0000



••000

ENDURO PLUS foil



cedar forte





naturo oak





B705


intensity of use:

snowy oak

spring oak



ENDURO POLI foil

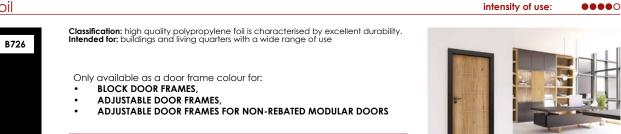

black

AVAILABLE GLASS



Can be combined with all models and colors of interior doors INVADO

transparent

satinato

chinchila





collection of **MODULAR DOORS**

Corato	12
Artano	14
Aversa	14
Mirror	16
Lago	18
Pasaro	20
Vinadio	22
Fossano	24
Imperia	26
Destino Unico	28
Livata	30
Versano	32
Nogaro	34
Tamparo	36
Linea Forte	38
Capena Inserto	40
Martina	42
Domino	44
Bianco	46
Larina	48
D'Artagnan	50







IGLE DOUBLE ORS DOORS DOORS FOR SLIDING SYSTEMS

DOORS WITH VENTILATION





4

2/

3



AVAILABLE DECORS



B724] black B102k	rame colour for:
---	------------------

ORS8

ORS7

CONSTRUCTION

1 • filling element: 22 mm-thick panel filling element: panel or glass, depending on the model (4 mm-thick)

- 2 • 3
 - the frame is made of MDF board upper part of the frame is 350 mm high, lower part of the frame is 400 mm high
- 4 door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT FOR REBATED DOOR LEAVES

• lock 72 mm for a standard key, a WC knob, or a cylinder lock insert • screw-in pivot hinges 13,5/9 (white zinc) -2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

STANDARD EQUIPMENT FOR NON-REBATED DOOR LEAVES

magnetic lock 90 mm for a standard key or a WC knob, 85 mm for a cylinder lock insert

hidden hinges with a 3-D regulation in the color CHROME/MATT

ADDITIONAL OPTIONS CHARGED EXTRA door without a key hole

	no extra charge
door width "100"	
 additional hinge for the door in sizes "60"–"80" 	
 additional hinge for non-rebated door—included in a door frame 	door frame additional options—page 89
 caps for hinges (chrome, satin chrome, golden, black) 	
ventilation undercut	
PVC ventilation sleeves	
 metal ventilation sleeves, round (chrome, golden) 	
metal ventilation sleeves, square (chrome, nickel)	
door made in a non-rebated version for sliding systems	
door made in a non-rebated version	
double door	•
 cylinder lock insert 31/36 (31/31 in non-rebated door leaves) 	•
 automatic bottom door seal, widths "60"–"100" 	
 aluminum thresholds, widths: "60"–"100" 	••••••



ORS10

•	NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	page 90–91
•	[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	page 89
•	[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	page 89
•	[ORS8] adjustable door frame with a flat angle architrave 80 mm-wide	page 88
•	[ORS1] adjustable door frame with a flat angle architrave 60 mm-wide	page 88
•	[OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	page 87

OB3

ORS1

standard—no extra charge

COLLECTION OF MODULAR DOORS **Artano** and **Aversa**



DOORS FOR SLIDING SYSTEMS

••• DOORS WITH



3

4



Aversa



AVAILABLE DECORS



[8726] black	ENDURO POLI foil Only available as a door frame colour for: • BLOCK DOOR FRAMES, • ADJUSTABLE DOOR FRAMES, • ADJUSTABLE DOOR FRAMES FOR NON-REBATED MODULAR DOORS
-----------------	---

CONSTRUCTION

- 1 filling element: 16 mm-thick panel (Artano) / 22 mm-thick panel (Aversa) •
- 2 3 4 filling element: panel or glass, depending on the model (4 mm-thick)
 - the frame is made of MDF board
 - door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT FOR REBATED DOOR LEAVES

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13,5/9 (white zinc) 2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"


STANDARD EQUIPMENT FOR NON-REBATED DOOR LEAVES

magnetic lock 90 mm for a standard key or a WC knob, 85 mm for a cylinder lock insert hidden hinges with a 3-D regulation in the color CHROME/MATT

A	ADDITIONAL OPTIONS CHARGED EXTRA		
•	door without a key hole	no extra charge	
•	door width "100"		
•	additional hinge for the door in sizes "60"-"80"		
•	additional hinge for non-rebated door—included in a door frame	door frame additional options—page 89	
•	caps for hinges (chrome, satin chrome, golden, black)		
•	ventilation undercut		

PVC ventilation sleeves
 metal ventilation sleeves, round (chrome, golden)
metal ventilation sleeves, square (chrome, nickel)
door made in a non-rebated version for sliding systems
door made in a non-rebated version
double door
 cylinder lock insert 31/36 (31/3) in non-rebated door leaves)

- automatic bottom door seal, widths "60"-"100'
- aluminum thresholds, widths: "60"–"100"

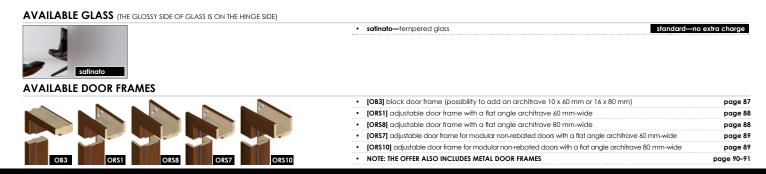





LE DOUBLE RS DOORS DOORS FOR SLIDING SYSTEMS









AVAILABLE DECORS







CONSTRUCTION

- filling element: panel (6 mm-thick) ٠
- 1 filling element: mirror (4 mm-thick)
- 2 3 4 the frame is made of MDF board
 - . door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on page 86) .
- in case of double doors, there is a covering strip (drawing on page 86) • width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT FOR REBATED DOOR LEAVES

• lock 72 mm for a standard key, a WC knob, or a cylinder lock insert • screw-in pivot hinges 13,5/9 (white zinc) -2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

STANDARD EQUIPMENT FOR NON-REBATED DOOR LEAVES

• magnetic lock 90 mm for a standard key or a WC knob, 85 mm for a cylinder lock insert

 hidden hinges with a 3-D regulation in the color CHROME/MATT 	
ADDITIONAL OPTIONS CHARGED EXTRA	
door without a key hole	no extra charge
door width "100"	
additional hinge for the door in sizes "60"-"80"	•
additional hinge for non-rebated door—included in a door frame	door frame additional options—page 89
 caps for hinges (chrome, satin chrome, golden, black) 	
ventilation undercut	
PVC ventilation sleeves	
 metal ventilation sleeves, round (chrome, golden) 	
 metal ventilation sleeves, square (chrome, nickel) 	
 door made in a non-rebated version for sliding systems 	
door made in a non-rebated version	
double door	
 cylinder lock insert 31/36 (31/31 in non-rebated door leaves) 	
 automatic bottom door seal, widths "60"-"100" 	
 aluminum thresholds, widths: "60"–"100" 	

AVAILABLE DOOR FRAMES



 [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm) 	page 87
[ORS1] adjustable door frame with a flat angle architrave 60 mm-wide	page 88
[ORS8] adjustable door frame with a flat angle architrave 80 mm-wide	page 88
• [ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	page 89
• [ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	page 89
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	page 90–91

ADDITIONAL INFORMATION.	
equipment and accessories—page	95-97

1

3

2

4

COLLECTION OF MODULAR DOORS AVAILABLE OPTIONS OF DOOR LEAVES EXECUTION ••• Lago DOORS FOR SLIDING SYSTEMS DOORS WITH VENTILATION REBATED DOORS NON-REBATED DOORS SINGLE DOORS DOUBLE DOORS WATCH THE ASSEMBLY VIDEOS ON OUR YOUTUBE CHANNEL -3 2 e







- rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

- STANDARD EQUIPMENT FOR REBATED DOOR LEAVES
- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert • screw-in pivot hinges 13,5/9 (white zinc) - 2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

STANDARD EQUIPMENT FOR NON-REBATED DOOR LEAVES

magnetic lock 90 mm for a standard key or a WC knob, 85 mm for a cylinder lock insert

 magnetic lock 90 mm for a standard key or a WC knob, 85 mm for a cyl 	inder lock insert
hidden hinges with a 3-D regulation in the color CHROME/MATT	
ADDITIONAL OPTIONS CHARGED EXTRA	
door without a key hole	no extra charge
door width "100"	
 additional hinge for the door in sizes "60"–"80" 	
 additional hinge for non-rebated door—included in a door frame 	door frame additional options—page 8
 caps for hinges (chrome, satin chrome, golden, black) 	
ventilation undercut	
PVC ventilation sleeves	
 metal ventilation sleeves, round (chrome, golden) 	
 metal ventilation sleeves, square (chrome, nickel) 	
 door made in a non-rebated version for sliding systems 	
door made in a non-rebated version	
double door	

- double door cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
 - automatic bottom door seal, widths "60"-"100" aluminum thresholds, widths: "60"-"100"



coimbra

B541

B462

B473

precious oak

ebony

B597

classic walnut

ENDURO PLUS foil

B587

ECO-VENEER FORTE

B474

B726]

duro walnut eterno oak grey oak

÷

ENDURO 3D foil

3

ıtumn

30

÷

B637

B705

anthracite

30

÷

B639

B707

B490

white

ENDURO POLI foil Only available as a door frame colour for: • BLOCK DOOR FRAMES, • ADJUSTABLE DOOR FRAMES, • ADJUSTABLE DOOR FRAMES FOR NON-REBATED MODULAR DOORS

european oak

30

÷

B708 winter oak larch siberian

ECO-VENEER CPL

÷

oak

B598

B596

B476

ashy oak

30

÷

cedar forte naturo oak snowy oak spring oak





DOUBLE DOORS

... DOORS FOR Sliding Systems DOORS WITH VENTILATION







2

4



AVAILABLE DECORS



RO POLI foil liable as a door frame colour for: K DOOR FRAMES, STABLE DOOR FRAMES, STABLE DOOR FRAMES FOR NON-REBATED MODULAR DOORS

CONSTRUCTION 1 • filling element: 22 mm-thick panel

- 2 filling element: panel or glass, depending on the model (4 mm-thick)
- 3
 - the frame is made of MDF board upper part of the frame is 350 mm high, lower part of the frame is 400 mm high
- 4 door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86) • width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT FOR REBATED DOOR LEAVES

 lock 72 mm for a standard key, a WC knob, or a cylinder lock insert • screw-in pivot hinges 13,5/9 (white zinc) -2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

STANDARD EQUIPMENT FOR NON-REBATED DOOR LEAVES

magnetic lock 90 mm for a standard key or a WC knob, 85 mm for a cylinder lock insert

hidden hinges with a 3-D regulation in the color CHROME/MATT

ADDITIONAL OPTIONS CHARGED EXTRA

 door without a key hole 	no extra charge
door width "100"	
 additional hinge for the door in sizes "60"–"80" 	
 additional hinge for non-rebated door—included in a door frame 	door frame additional options—page 89
 caps for hinges (chrome, satin chrome, golden, black) 	
ventilation undercut	
PVC ventilation sleeves	
 metal ventilation sleeves, round (chrome, golden) 	
 metal ventilation sleeves, square (chrome, nickel) 	
 door made in a non-rebated version for sliding systems 	
door made in a non-rebated version	
double door	
 cylinder lock insert 31/36 (31/31 in non-rebated door leaves) 	
 automatic bottom door seal, widths "60"–"100" 	
 aluminum thresholds, widths: "60"–"100" 	

AVAILABLE GLASS (THE GLOSSY SIDE OF GLASS IS ON THE HINGE SIDE) standard—no extra charge • satinato-tempered glass / satinato **AVAILABLE DOOR FRAMES** • [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm) page 87 [ORS1] adjustable door frame with a flat angle architrave 60 mm-wide page 88 [ORS8] adjustable door frame with a flat angle architrave 80 mm-wide page 88 . [ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide page 89 . [ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide page 89 . NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES page 90–91 ORS1 ORS8 ORS7 ORS10 OB3





DOUBLE DOORS DOORS FOR SLIDING SYSTEMS

DOORS WITH VENTILATION





1/

4

2 /

3






[B726 black	ENDURO POLI foil Only available as a door frame colour for: • BLOCK DOOR FRAMES, • ADJUSTABLE DOOR FRAMES, • ADJUSTABLE DOOR FRAMES FOR NON-REBATED MODULAR DOORS
----------------	---

CONSTRUCTION

- filling element: 22 mm-thick panel
- filling element: panel or glass, depending on the model (4 mm-thick)
- the frame is made of MDF board
- 2 3 4 door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"
- STANDARD EQUIPMENT FOR REBATED DOOR LEAVES
- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert • screw-in pivot hinges 13,5/9 (white zinc) - 2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"
- STANDARD EQUIPMENT FOR NON-REBATED DOOR LEAVES
- magnetic lock 90 mm for a standard key or a WC knob, 85 mm for a cylinder lock insert
- .
- $hidden \ hinges$ with a 3-D regulation in the color CHROME/MATT ADDITIONAL OPTIONS CHARGED EXTRA • door without a key hole no extra charc door width "100" . additional hinge for the door in sizes "60"–"80" • additional hinge for non-rebated door—included in a door frame door frame additional or caps for hinges (chrome, satin chrome, golden, black) ventilation undercut • PVC ventilation sleeves . metal ventilation sleeves, round (chrome, golden) . metal ventilation sleeves, square (chrome, nickel) • door made in a non-rebated version for sliding systems door made in a non-rebated version . double door cylinder lock insert 31/36 (31/31 in non-rebated door leaves) automatic bottom door seal, widths "60"-"100" aluminum thresholds, widths: "60"-"100"

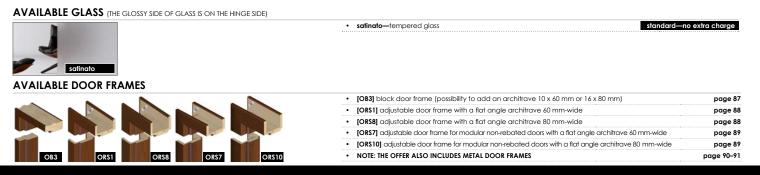

IONAL INFORMATION: ment and accessories—page 95–97





DOUBLE DOORS DOORS FOR DO SLIDING VI SYSTEMS



•••









Fossano

 \sim



Fossano 4





ŝ



1

47

2

3

AVAILABLE DECORS



ENDURO POLI foil Only available as a door frame colour for: BLOCK DOOR FRAMES, ADJUSTABLE DOOR FRAMES,
--

CONSTRUCTION

- 1 • filling element: 22 mm-thick panel
 - filling element: panel or glass, depending on the model (4 mm-thick)
 - the frame is made of MDF board
- 2 3 4 door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT FOR REBATED DOOR LEAVES


 lock 72 mm for a standard key, a WC knob, or a cylinder lock insert • screw-in pivot hinges 13,5/9 (white zinc) - 2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

STANDARD EQUIPMENT FOR NON-REBATED DOOR LEAVES

- magnetic lock 90 mm for a standard key or a WC knob, 85 mm for a cylinder lock insert

odoor without a key hole	no extra charg
• door width "100"	
 additional hinge for the door in sizes "60"—"80" 	
 additional hinge for non-rebated door—included in a door frame 	door frame additional options—page
 caps for hinges (chrome, satin chrome, golden, black) 	
 ventilation undercut 	
PVC ventilation sleeves	
 metal ventilation sleeves, round (chrome, golden) 	
 metal ventilation sleeves, square (chrome, nickel) 	
 door made in a non-rebated version for sliding systems 	•••••

- door made in a non-rebated version . double door • cylinder lock insert 31/36 (31/31 in non-rebated door leaves) automatic bottom door seal, widths "60"-"100"
- aluminum thresholds, widths: "60"-"100" •

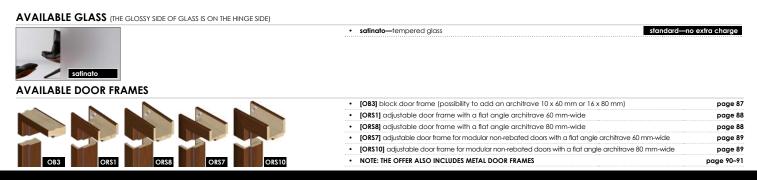





DOUBLE DOORS

DOORS FOR SLIDING SYSTEMS

85 3





4

2

3

no extra charge



1

3 4

•

.

• 2

•

• filling element: 22 mm-thick panel

side edges and upper edge are foiled

AVAILABLE DECORS



[B726] black	ENDURO POLI foil Only available as a door frame colour for: • BLOCK DOOR FRAMES, • ADJUSTABLE DOOR FRAMES, • ADJUSTABLE DOOR FRAMES FOR NON-REBATED MODULAR DOORS
-----------------	---

STANDARD EQUIPMENT FOR NON-REBATED DOOR LEAVES magnetic lock 90 mm for a standard key or a WC knob, 85 mm for a cylinder lock insert $hidden \ hinges$ with a 3-D regulation in the color CHROME/MATT ADDITIONAL OPTIONS CHARGED EXTRA · door without a key hole door width "100" additional hinge for the door in sizes "60"-"80" door frame additional options—page 89 additional hinge for non-rebated door—included in a door frame

filling element: panel or glass, depending on the model (4 mm-thick)

door leaf covered with ENDURO foil or ECO-VENEER

rounded vertical edges of door leaves (more info on page 86)

in case of double doors, there is a covering strip (drawing on page 86)

STANDARD EQUIPMENT FOR REBATED DOOR LEAVES


• width of single doors: "60"-"100" / width of double doors: "120"-"200"

lock 72 mm for a standard key, a WC knob, or a cylinder lock insert

the frame is made of MDF board - upper part of the frame is 350 mm high, lower part of the frame element is 400 mm high

•	caps for hinges (chrome, safin chrome, golden, black)
•	ventilation undercut
•	PVC ventilation sleeves
•	metal ventilation sleeves, round (chrome, golden)
•	metal ventilation sleeves, square (chrome, nickel)
•	door made in a non-rebated version for sliding systems
•	door made in a non-rebated version
•	double door
•	cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
•	automatic bottom door seal, widths "60"-"100"
•	aluminum thresholds, widths: "60"—"100"

• screw-in pivot hinges 13,5/9 (white zinc) - 2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

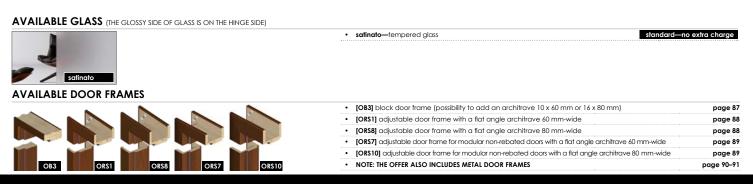





2

5 /

4

3

xtra charge

—page 89





One of the most popular models of INVADO doors—DESTINO UNICO—has been awarded a "Gold Medal". These door leaves are a bold combination of colors, that allows to create intriguing, stylized interiors.

Portage we had no doubt, that this is the collection to be submitted to the prestigious "Gold Medal" contest, held at the International Poznań Fair BUDMA. The IPF "Gold Medal" is one of the most recognizable awards in the Polish market, which is given to innovative products of the highest quality. We are proud and we thank to all those involved in the production and sale of doors Destino Unico.

A

AVAILABLE DECORS



[B726] black	ENDURO POLI foil Only available as a door frame colour for: • BLOCK DOOR FRAMES, • ADJUSTABLE DOOR FRAMES, • ADJUSTABLE DOOR FRAMES FOR NON-REBATED MODULAR DOORS
-----------------	---

CONSTRUCTION

- 1 filling element: panel or glass, depending on the model (4 mm-thick) •
- filling element: 22 mm-thick panel 2 3 4 •
- the frame is made of MDF board
- double-sided glass insert—80 mm wide
- 5 door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- . rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT FOR REBATED DOOR LEAVES

• lock 72 mm for a standard key, a WC knob, or a cylinder lock insert • screw-in pivot hinges 13,5/9 (white zinc) - 2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

STANDARD EQUIPMENT FOR NON-REBATED DOOR LEAVES

magnetic lock 90 mm for a standard key or a WC knob, 85 mm for a cylinder lock insert

hidden hinges with a 3-D regulation in the color CHROME/MATT

ADDITIONAL OPTIONS CHARGED EXTRA		
door without a key hole	no ex	
door width "100"		
 additional hinge for the door in sizes "60"–"80" 		
additional hinge for non-rebated door—included in a door frame	door frame additional options	
	•••••••••••••••••••••••••••••••••••••••	

•	caps for hinges (chrome, satin chrome, golden, black)
•	ventilation undercut
•	PVC ventilation sleeves
•	metal ventilation sleeves, round (chrome, golden)
•	metal ventilation sleeves, square (chrome, nickel)
•	door made in a non-rebated version for sliding systems
•	door made in a non-rebated version
•	double door
•	cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
•	automatic bottom door seal, widths "60"–"100"

aluminum thresholds, widths: "60"-"100"

AVAILABLE GLASS (THE GLOSSY SIDE OF GLASS IS ON THE HINGE SIDE) standard—no extra charge • satinato-tempered glass AVAILABLE COLORS OF GLASS INSERT: : mebie. / satinato 9005 9005 Soft 7015 AVAILABLE DOOR FRAMES • [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm) page 87 page 88 [ORS1] adjustable door frame with a flat angle architrave 60 mm-wide page 88 . [ORS8] adjustable door frame with a flat angle architrave 80 mm-wide [ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide page 89 . [ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide page 89 NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES ORS8 ORS7 ORS10 page 90–91 ORS1







DOORS FOR SLIDING SYSTEMS





WATCH THE ASSEMBLY VIDEOS ON OUR YOUTUBE CHANNEL

mann



2

3

4



AVAILABLE DECORS



[B726] black	ENDURO POLI foil Only available as a door frame colour for: • BLOCK DOOR FRAMES, • ADJUSTABLE DOOR FRAMES, • ADJUSTABLE DOOR FRAMES FOR NON-REBATED MODULAR DOORS
-----------------	---

CONSTRUCTION

1 • filling element: panel or glass, depending on the model (4 mm-thick)

- filling element: 22 mm-thick panel
 the frame is made of MDF board
- the frame is made of MDF board
- 2 3 4 door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86) • width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT FOR REBATED DOOR LEAVES

 lock 72 mm for a standard key, a WC knob, or a cylinder lock insert • screw-in pivot hinges 13,5/9 (white zinc) - 2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

STANDARD EQUIPMENT FOR NON-REBATED DOOR LEAVES

magnetic lock 90 mm for a standard key or a WC knob, 85 mm for a cylinder lock insert

hidden hinges with a 3-D regulation in the color CHROME/MATT

ADDITIONAL OPTIONS CHARGED EXTRA • door without a key hole no extra charge • door width "100" • additional hinge for the door in sizes "60"-"80"

 additional hinge for non-rebated door—included in a door frame 	door frame additional options—page 89
 caps for hinges (chrome, satin chrome, golden, black) 	
ventilation undercut	
PVC ventilation sleeves	
 metal ventilation sleeves, round (chrome, golden) 	
metal ventilation sleeves, square (chrome, nickel)	
door made in a non-rebated version for sliding systems	
door made in a non-rebated version	
double door	
cylinder lock insert 31/36 (31/31 in non-rebated door leaves)	
 automatic bottom door seal, widths "60""100" 	
 aluminum thresholds, widths: "60"–"100" 	







2

3

4



AVAILABLE DECORS



B7261 Black Brzek

CONSTRUCTION

- filling element: 22 mm-thick panel 1
- 2 filling element: panel or glass, depending on the model (4 mm-thick)
 - the frame is made of MDF board, upper part of the frame is 350 mm high, lower part of the frame is 400 mm high
- 3
- door leaf covered with ENDURO foil or ECO-VENEER 4
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86) • width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT FOR REBATED DOOR LEAVES

 lock 72 mm for a standard key, a WC knob, or a cylinder lock insert • screw-in pivot hinges 13,5/9 (white zinc) - 2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

STANDARD EQUIPMENT FOR NON-REBATED DOOR LEAVES

magnetic lock 90 mm for a standard key or a WC knob, 85 mm for a cylinder lock insert

hidden hinges with a 3-D regulation in the color CHROME/MATT

ADDITIONAL OPTIONS CHARGED EXTRA • door without a key hole no extra charge • door width "100" • additional hinge for the door in sizes "60"-"80" rebated door_included in a door frame a daliki a a al la la a a far u

 additional ninge for non-rebated door—included in a door frame 	door frame additional options—page 89
 caps for hinges (chrome, satin chrome, golden, black) 	
ventilation undercut	
PVC ventilation sleeves	
 metal ventilation sleeves, round (chrome, golden) 	
 metal ventilation sleeves, square (chrome, nickel) 	
 door made in a non-rebated version for sliding systems 	
door made in a non-rebated version	
double door	
 cylinder lock insert 31/36 (31/31 in non-rebated door leaves) 	
 automatic bottom door seal, widths "60"–"100" 	
 aluminum thresholds, widths: "60"–"100" 	







GLE DOUBLE DRS DOORS DOORS FOR SLIDING SYSTEMS







4

2

3



AVAILABLE DECORS




[B726] black	ENDURO POLI foil Only available as a door frame colour for: • BLOCK DOOR FRAMES, • ADJUSTABLE DOOR FRAMES, • ADJUSTABLE DOOR FRAMES FOR NON-REBATED MODULAR DOORS
-----------------	---

CONSTRUCTION

- filling element: 22 mm-thick panel
- filling element: panel or glass, depending on the model (4 mm-thick) •
- the frame is made of MDF board
- 2 3 4 door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86) width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT FOR REBATED DOOR LEAVES

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert • screw-in pivot hinges 13,5/9 (white zinc) - 2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"
- STANDARD EQUIPMENT FOR NON-REBATED DOOR LEAVES
- magnetic lock 90 mm for a standard key or a WC knob, 85 mm for a cylinder lock insert
- .
- $hidden \ hinges$ with a 3-D regulation in the color CHROME/MATT ADDITIONAL OPTIONS CHARGED EXTRA • door without a key hole no extra charc door width "100" . additional hinge for the door in sizes "60"-"80" • additional hinge for non-rebated door—included in a door frame door frame additional o . caps for hinges (chrome, satin chrome, golden, black) ventilation undercut . PVC ventilation sleeves . metal ventilation sleeves, round (chrome, golden) metal ventilation sleeves, square (chrome, nickel) door made in a non-rebated version for sliding systems door made in a non-rebated version . double door cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
 - automatic bottom door seal, widths "60"-"100"
 - aluminum thresholds, widths: "60"-"100"

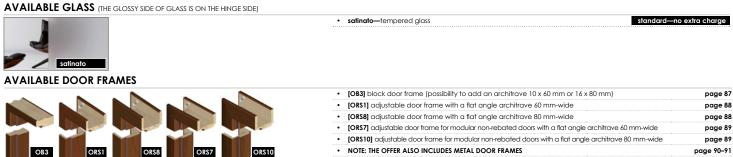





DOUBLE DOORS DOORS FOR SLIDING SYSTEMS



WATCH THE ASSEMBLY VIDEOS ON OUR YOUTUBE CHANNEL



ю

10

10





• satinato—tempered glass

DDITIONAL OPTIONS CHARGED EXTRA	
door without a key hole	no extra charg
door width "100"	
additional hinge for the door in sizes "60"–"80"	
additional hinge for non-rebated door—included in a door frame	door frame additional options—page
caps for hinges (chrome, satin chrome, golden, black)	
ventilation undercut	
PVC ventilation sleeves	
metal ventilation sleeves, round (chrome, golden)	
metal ventilation sleeves, square (chrome, nickel)	
door made in a non-rebated version for sliding systems	
door made in a non-rebated version	
double door	
cylinder lock insert 31/36 (31/31 in non-rebated door leaves)	

AVAILABLE GLASS (THE GLOSSY SIDE OF GLASS IS ON THE HINGE SIDE)

B707 winter oak siberian larch

B490

white

ENDURO POLI foil Only available as a door frame colour for: • BLOCK DOOR FRAMES, • ADJUSTABLE DOOR FRAMES, • ADJUSTABLE DOOR FRAMES FOR NON-REBATED MODULAR DOORS

ECO-VENEER CPL



cedar forte naturo oak snowy oak spring oak

B476

ECO-VENEER FORTE

B474

[B726]

duro walnut eterno oak grey oak

B402

B541

B462

B473

coimbra



page 87	[OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)
page 88	[ORS1] adjustable door frame with a flat angle architrave 60 mm-wide
page 88	[ORS8] adjustable door frame with a flat angle architrave 80 mm-wide
page 89	• [ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide
page 89	• [ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide
page 90–91	NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES

standard—no extra charge

Linea Forte



DOUBLE DOORS FOR SLIDING SYSTEMS

DOORS WITH VENTILATION

L



WATCH THE ASSEMBLY VIDEOS ON OUR YOUTUBE CHANNEL



E

38 ww.invado.pl I

17

2

3

4



AVAILABLE DECORS



B7261 Black Black Brazel Black Brazel Black Brazel Black Brazel Black Brazel Black Brazel Black Brazel Black Brazel Black Brazel Black Brazel Brazel Black Brazel Black Brazel Brazel Black Brazel Black Brazel Brazel Brazel Black Brazel Brazel Brazel Brazel Black Brazel Black Brazel Brazel Black Brazel Black Brazel Brazel Black Black Brazel Black Brazel Black Bla	ORS
--	-----

CONSTRUCTION


- filling element: 22 mm-thick panel
- filling element: panel or glass, depending on the model (4 mm-thick)
 the frame is made of MDF board
- 2 3 the frame is made of MDF board
- door leaf covered with ENDURO foil or ECO-VENEER 4
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT FOR REBATED DOOR LEAVES

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert • screw-in pivot hinges 13,5/9 (white zinc) - 2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"
- STANDARD EQUIPMENT FOR NON-REBATED DOOR LEAVES
- magnetic lock 90 mm for a standard key or a WC knob, 85 mm for a cylinder lock insert
- $hidden \ hinges$ with a 3-D regulation in the color CHROME/MATT

ADDITIONAL OPTIONS CHARGED EXTRA door without a key hole door width "100" . additional hinge for the door in sizes "60"-"80" • additional hinge for non-rebated door—included in a door frame caps for hinges (chrome, satin chrome, golden, black) ventilation undercut • PVC ventilation sleeves metal ventilation sleeves, round (chrome, golden)

- metal ventilation sleeves, square (chrome, nickel) door made in a non-rebated version for sliding systems door made in a non-rebated version double door cylinder lock insert 31/36 (31/31 in non-rebated door leaves) • automatic bottom door seal, widths "60"-"100"
- · aluminum thresholds, widths: "60"-"100"

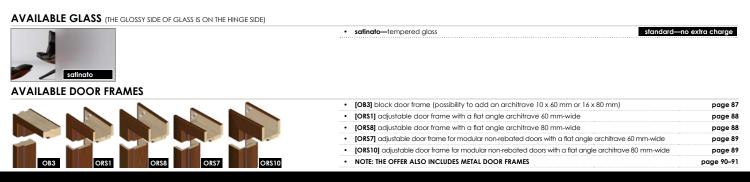

COLLECTION OF MODULAR DOORS Capena Inserto



DOUBLE DOORS

••• DOORS FOR SLIDING SYSTEMS DOORS WITH





1

2

5 /

47

3



AVAILABLE DECORS



Only ava BLOC ADJU	RO POLI foil allable as a door frame colour for: ix DOOR FRAMES, ISTABLE DOOR FRAMES, ISTABLE DOOR FRAMES FOR NON-REBATED MODULAR DOORS
--------------------------	---

CONSTRUCTION

- 1 filling element: panel or glass, depending on the model (4 mm-thick) •
 - filling element: 22 mm-thick panel
 - the frame is made of MDF board
- 2 3 4 ALU strip—8 mm
- 5 door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86) • width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT FOR REBATED DOOR LEAVES


• lock 72 mm for a standard key, a WC knob, or a cylinder lock insert • screw-in pivot hinges 13,5/9 (white zinc) - 2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

STANDARD EQUIPMENT FOR NON-REBATED DOOR LEAVES

- magnetic lock 90 mm for a standard key or a WC knob, 85 mm for a cylinder lock insert
- . $hidden \ hinges$ with a 3-D regulation in the color CHROME/MATT

ADDITIONAL OPTIONS CHARGED EXTRA • door without a key hole no extra char door width "100" . additional hinge for the door in sizes "60"-"80" • additional hinge for non-rebated door—included in a door frame door frame additional o . caps for hinges (chrome, satin chrome, golden, black) ventilation undercut . PVC ventilation sleeves

- metal ventilation sleeves, round (chrome, golden) . metal ventilation sleeves, square (chrome, nickel) door made in a non-rebated version for sliding systems door made in a non-rebated version double door cylinder lock insert 31/36 (31/31 in non-rebated door leaves)
- automatic bottom door seal, widths "60"-"100"
- aluminum thresholds, widths: "60"-"100"

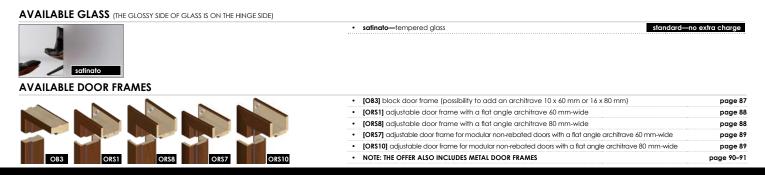





SINGLE DOORS DOUBLE DOORS

DOORS FOR SLIDING SYSTEMS

••• DOORS WITH VENTILATION









[8726] black	ENDURO POLI foil Only available as a door frame colour for: • BLOCK DOOR FRAMES, • ADJUSTABLE DOOR FRAMES, • ADJUSTABLE DOOR FRAMES FOR NON-REBATED MODULAR DOORS
-----------------	---

CONSTRUCTION

- filling element: panel or glass, depending on the model (4 mm-thick)
- filling element: 22 mm-thick panel
- the frame is made of MDF board
- 2 3 4 door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT FOR REBATED DOOR LEAVES

 lock 72 mm for a standard key, a WC knob, or a cylinder lock insert • screw-in pivot hinges 13,5/9 (white zinc) - 2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

STANDARD EQUIPMENT FOR NON-REBATED DOOR LEAVES

magnetic lock 90 mm for a standard key or a WC knob, 85 mm for a cylinder lock insert

 $hidden \ hinges$ with a 3-D regulation in the color CHROME/MATT

ADDITIONAL OPTIONS CHARGED EXTRA · door without a key hole no extra char door width "100" . additional hinge for the door in sizes "60"-"80" • additional hinge for non-rebated door—included in a door frame door frame additional . caps for hinges (chrome, satin chrome, golden, black)

- ventilation undercut • PVC ventilation sleeves metal ventilation sleeves, round (chrome, golden) . metal ventilation sleeves, square (chrome, nickel) • door made in a non-rebated version for sliding systems door made in a non-rebated version double door cylinder lock insert 31/36 (31/31 in non-rebated door leaves) automatic bottom door seal, widths "60"–"100"
- aluminum thresholds, widths: "60"–"100"

AVAILABLE GLASS (THE GLOSSY SIDE OF GLASS IS ON THE HINGE SIDE)

standard—no extra charge • satinato-tempered glass / satinato **AVAILABLE DOOR FRAMES** • [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm) page 87 page 88 [ORS1] adjustable door frame with a flat angle architrave 60 mm-wide page 88 [ORS8] adjustable door frame with a flat angle architrave 80 mm-wide page 89 [ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide [ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide . page 89 NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES page 90–91 ORS1 ORS8 ORS7 ORS10 . OB3







SINGLE DOORS DOUBLE DOORS

DOORS FOR SLIDING SYSTEMS

••• DOORS WITH VENTILATION







ARBONIA & Group





R

T

IGLE DOUBLE ORS DOORS DOORS FOR SLIDING SYSTEMS









AVAILABLE DOOR FRAMES



NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	
[ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	page 89
[ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	page 89
[ORS8] adjustable door frame with a flat angle architrave 80 mm-wide	page 88
[ORS1] adjustable door frame with a flat angle architrave 60 mm-wide	page 88

• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)

page 87





GLE DOUBLE DRS DOORS DOORS FOR SLIDING SYSTEMS

DOORS WITH VENTILATION











• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	page 87
[ORS1] adjustable door frame with a flat angle architrave 60 mm-wide	page 88
[ORS8] adjustable door frame with a flat angle architrave 80 mm-wide	page 88
• [ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	page 89
• [ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	page 89
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	page 90–91

D'Artagnan



NON-REBATED DOORS SINGLE DOORS DOUBLE DOORS

... DOORS WITH









AVAILABLE GLASS (THE MATT (ENGRAVED) SIDE OF GLASS IS LOCATED ON THE HINGE SIDE)

	satinato—tempered glass	o extra charge
Satinato	Ionger execution time transparent—tempered glass	o extra charge
	[OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	page 87
	[ORS1] adjustable door frame with a flat angle architrave 60 mm-wide	page 88
	[ORS8] adjustable door frame with a flat angle architrave 80 mm-wide	page 88
	• [ORS7] adjustable door frame for modular non-rebated doors with a flat angle architrave 60 mm-wide	page 89
	• [ORS10] adjustable door frame for modular non-rebated doors with a flat angle architrave 80 mm-wide	page 89
OB3 ORS1 ORS8 ORS7 ORS10	NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	page 90–91





collection of **FOILED DOORS**

Salerno	
Norma Decor	
Torino	
Merano	
Lido	
Dolce	64
Strada	
Sagittarius	
Gemini	
Virgo	
Parma	74
Orso	
Libra	
Taurus	

.

COLLECTION OF FOILED DOORS



AVAILABLE OPTIONS	OF DOOR LEAV	EXECUTION
REBATED DOORS	SINGLE DOORS	DOUBLE DOORS

DOUBLE DOORS FOR DOORS SLIDING SYSTEMS

R DOORS WITH VENTILATION











	[B726]	ENDURO POLI foil Only available as a door frame colour for: BLOCK DOOR FRAME, ADJUSTABLE DOOR FRAME,
	[B726] black	ADJUSTABLE DOOR FRAME, ADJUSTABLE DOOR FRAME FOR NON-REBATED MODULAR DOORS

CONSTRUCTION

- the frame is made of MDF board
- standard filling—"honeycomb"
- optional filling-chipboard
- 1 2 3 4 5 • frame with filling is covered with HDF boards on both sides
 - door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- . rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- . width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

satinato

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13,5/9 (white zinc)-2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

ADDITIONAL OPTIONS AT EXTRA CHARGE

door without a key hole	no extra charge
door width "100"	
 additional hinge for the door in sizes "60"–"80" 	
 caps for hinges (chrome, satin chrome, golden, black) 	
ventilation undercut	
PVC ventilation sleeves	
 metal ventilation sleeves, round (chrome, golden) 	
metal ventilation sleeves, square (chrome, nickel)	
door made in a non-rebated version for sliding systems	
double door	
cylinder lock insert 31/36	
tubular chipboard filling	
 automatic bottom door seal, widths "60"–"100" 	
aluminum thresholds, widths: "60"-"100"	



AVAILABLE DOOR FRAMES



page 87	• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)
page 88	[ORS1] adjustable door frame with a flat angle architrave 60 mm-wide
page 88	[ORS8] adjustable door frame with a flat angle architrave 80 mm-wide
page 90–91	NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES

standard—no extra charge





PORTHOLE in NORMA DECOR 6: available in silver and black colour with the possibility of using a transparent or satin glass pane option included in the price of the door leaf



1

2

3

ND2 and ND3 door leaves are available only in white [B134], beech [B136], oak [B224] and walnut [B339]

B406

ECO-VENEER CPL

B490

white

ebony

B706

autur oak

B657

severo oak

÷

30

foil

AVAILABLE DECORS				
ENDUR	O foil			
B134	B136	B224	B339	B402
lindo (white	e) beech	oak	walnut	coimbra
ENDUR	<mark>O 3D</mark> foi			
<u>a</u>			۵ ۹	
B541	B597	B598	B637	B639
precious oak	classic walnut	ashy oak	anthracite	european oak
ENDUR	O PLUS f	oil		



ECO-VENEER FORTE

B473 B474 B476

duro walnut eterno oak grey oak

10	[B726] black	ENDURO POLI foil Only available as a door frame colour for: • BLOCK DOOR FRAME, • ADJUSTABLE DOOR FRAME, • ADJUSTABLE DOOR FRAME FOR NON-REBATED MODULAR DOORS

CONSTRUCTION

- the frame is made of MDF board
- standard filling—"honeycomb"
- 1 2 3 4 5 • optional filling-chipboard
- frame with filling is covered with HDF boards on both sides
- door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- . rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- . width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13,5/9 (white zinc)-2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

ADDITIONAL OPTIONS AT EXTRA CHARGE

•••	
•	door without a key hole no extra charge
•	door width "100"
•	additional hinge for the door in sizes "60"–"80"
•	caps for hinges (chrome, satin chrome, golden, black)
•	ventilation undercut
•	PVC ventilation sleeves
•	metal ventilation sleeves, round (chrome, golden)
•	metal ventilation sleeves, square (chrome, nickel)
•	door made in a non-rebated version for sliding systems
•	double door
•	cylinder lock insert 31/36
•	tubular chipboard filling
•	automatic bottom door seal, widths "60""100"
•	aluminum thresholds, widths: "60"—"100"
•	ventilation grid

AVAILABLE GLASS THE MATT (ENGRAVED) SIDE OF GLASS-ON THE HINGES SIDE



•	chinchila	standard—no extra charge
•	satinato	at extra charge
•	satinato or transparent—NORMA DECOR 6	no extra charge

page 87	 [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)
page 88	[ORS1] adjustable door frame with a flat angle architrave 60 mm-wide
page 88	[ORS8] adjustable door frame with a flat angle architrave 80 mm-wide
page 90–91	NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES

OB3

ORS1







Only available as a door frame colour for:
 BLOCK DOOR FRAME,
 ADJUSTABLE DOOR FRAME,
 ADJUSTABLE DOOR FRAME FOR NON-REBATED MODULAR DOORS

CONSTRUCTION

- the frame is made of MDF board
- standard filling—"honeycomb"
- 1 2 3 4 5 optional filling-chipboard
- frame with filling is covered with HDF boards on both sides
- door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- . rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- . width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

satinato

chinchila

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13,5/9 (white zinc)-2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

ADDITIONAL OPTIONS AT EXTRA CHARGE

door without a key hole		no extra charge
 door width "100" 		
additional hinge for the doc	or in sizes "60"–"80"	
 caps for hinges (chrome, sa 	tin chrome, golden, black)	
 ventilation undercut 		
 PVC ventilation sleeves 		
 metal ventilation sleeves, ro 	und (chrome, golden)	
 metal ventilation sleeves, sq 	juare (chrome, nickel)	
 door made in a non-rebate 	d version for sliding systems	
double door		
 cylinder lock insert 31/36 		
 tubular chipboard filling 		
 automatic bottom door seal, 	, widths "60"–"100"	
 aluminum thresholds, widths: 	"60"—"100"	

AVAILABLE GLASS (THE GLOSSY SIDE OF GLASS IS ON THE HINGE SIDE)

	JE
satinato	Chinchila

AVAILABLE DOOR FRAMES

[B726]



page 87	• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)
page 88	• [ORS1] adjustable door frame with a flat angle architrave 60 mm-wide
page 88	• [ORS8] adjustable door frame with a flat angle architrave 80 mm-wide
page 90–91	NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES



ADDITIONAL INFORMATION: equipment and accessories—page 95–97

standard—no extra charge

standard—no extra charae









	[B726] black	ENDURO POLI foil Only available as a door frame colour for: • BLOCK DOOR FRAME, • ADJUSTABLE DOOR FRAME, • ADJUSTABLE DOOR FRAME FOR NON-REBATED MODULAR DOORS
--	-----------------	--

CONSTRUCTION

- the frame is made of MDF board
- : standard filling—"honeycomb"
- optional filling-chipboard
- 1 2 3 4 5 frame with filling is covered with HDF boards on both sides
 - door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- . rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

 satinato chinchila

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13,5/9 (white zinc)-2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

ADDITIONAL OPTIONS AT EXTRA CHARGE

door without a key hole	no extra charge
door width "100"	
 additional hinge for the door in sizes "60"–"80" 	
 caps for hinges (chrome, satin chrome, golden, black) 	
ventilation undercut	
PVC ventilation sleeves	
 metal ventilation sleeves, round (chrome, golden) 	
metal ventilation sleeves, square (chrome, nickel)	
door made in a non-rebated version for sliding systems	
double door	
cylinder lock insert 31/36	
tubular chipboard filling	
automatic bottom door seal, widths "60"-"100"	
aluminum thresholds, widths: "60"-"100"	••••••

AVAILABLE GLASS (THE GLOSSY SIDE OF GLASS IS ON THE HINGE SIDE)



AVAILABLE DOOR FRAMES



page 87	• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)
page 88	• [ORS1] adjustable door frame with a flat angle architrave 60 mm-wide
page 88	• [OR\$8] adjustable door frame with a flat angle architrave 80 mm-wide
page 90–91	NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES



1

2/

standard—no extra charge

standard—no extra charae



1

4 /

....

3

2





10.	ENDURO POLI foil Only available as a door frame colour for: • BLOCK DOOR FRAME,

ADJUSTABLE DOOR FRAME,
 ADJUSTABLE DOOR FRAME FOR NON-REBATED MODULAR DOORS

CONSTRUCTION

- 1
 the frame is made of MDF board

 2
 standard

 3
 frame with filling--tubular chipboard

 3
 frame with filling is covered with HDF boards on both

 4
 door leaf covered with ENDURO foil or ECO-VENEER

 • frame with filling is covered with HDF boards on both sides
- ALU strip width—8 mm
- side edges and upper edge are foiled
- rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86) width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

- lock 72 mm for standard key, WC knob or cylinder lock insert
- screw-in pivot hinges 13,5/9 (white zinc)-2 pcs in door leaves "60"-"80", 3 pcs in door leaves "90"-"100"

ADDITIONAL OPTIONS AT EXTRA CHARGE

 door without a key hole 	no extra charge
door width "100"	
 additional hinge in door width from "60"–"80" 	
caps for hinges	•
ventilation undercut	
PVC ventilation sleeves	
 metal ventilation sleeves, round (chrome, golden) 	
metal ventilation sleeves, square (chrome, nickel)	· · · · · · · · · · · · · · · · · · ·
door made in non-rebated version for sliding systems	
double door	
cylinder lock insert 31/36	· · · · · · · · · · · · · · · · · · ·
tubular chipboard filling	standard
 automatic door bottom seal, widths "60" – "100" 	
 aluminum thresholds, widths: "60" – "100" 	•••••••••••••••••••••••••••••••••••••••

AVAILABLE DOOR FRAMES

[B726] black



• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)

page 87

COLLECTION OF FOILED DOORS









[B726] black	ENDURO POLI foil Only available as a door frame colour for: • BLOCK DOOR FRAMES, • ADJUSTABLE DOOR FRAMES, • ADJUSTABLE DOOR FRAMES FOR NON-REBATED MODULAR DOORS
-----------------	---

CONSTRUCTION

•

- the frame is made of MDF board
- ÷ standard filling—"honeycomb"
- 1 2 3 4 5 • optional filling-chipboard
- frame with filling is covered with HDF boards on both sides
- door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- . rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13,5/9 (white zinc)-2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

ADDITIONAL OPTIONS AT EXTRA CHARGE

door without a key hole	no extra charge
door width "100"	•
 additional hinge for the door in sizes "60"—"80" 	
 caps for hinges (chrome, satin chrome, golden, black) 	
ventilation undercut	
PVC ventilation sleeves	
 metal ventilation sleeves, round (chrome, golden) 	
 metal ventilation sleeves, square (chrome, nickel) 	
door made in a non-rebated version for sliding systems	
double door	
cylinder lock insert 31/36	
tubular chipboard filling	
 automatic bottom door seal, widths "60"–"100" 	
 aluminum thresholds, widths: "60"–"100" 	•••••

AVAILABLE GLASS (THE GLOSSY SIDE OF GLASS IS ON THE HINGE SIDE)		
satinato	• salinato standard	no extra charge



• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	page 87
• [ORS1] adjustable door frame with a flat angle architrave 60 mm-wide	page 88
• [ORS8] adjustable door frame with a flat angle architrave 80 mm-wide	page 88
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	page 90–91



COLLECTION OF FOILED DOORS





DOORS FOR SLIDING SYSTEMS



WATCH THE ASSEMBLY VIDEOS ON OUR YOUTUBE CHANNEL





0



.

.

.

.

66 w.invado.pl







CONSTRUCTION

- the frame is made of MDF board
- standard filling—"honeycomb"
- optional filling-chipboard
- 1 2 3 4 5 frame with filling is covered with HDF boards on both sides
 - door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- . rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

lock 72 mm for a standard key, a WC knob, or a cylinder lock insert

1

2

4 /

3

screw-in pivot hinges 13,5/9 (white zinc)-2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

ADDITIONAL OPTIONS AT EXTRA CHARGE

door without a key hole	no extra charge
door width "100"	
 additional hinge for the door in sizes "60"-"80" 	
 caps for hinges (chrome, satin chrome, golden, black) 	
ventilation undercut	
PVC ventilation sleeves	
 metal ventilation sleeves, round (chrome, golden) 	
metal ventilation sleeves, square (chrome, nickel)	
door made in a non-rebated version for sliding systems	
double door	
cylinder lock insert 31/36	
tubular chipboard filling	
automatic bottom door seal, widths "60"-"100"	
 aluminum thresholds, widths: "60"–"100" 	

AVAILABLE GLASS (THE GLOSSY SIDE OF GLASS IS ON THE HINGE SIDE)		
	• satinato	standard—no extra charge



AVAILABLE DOOR FRAMES



ADDITIONAL INFORMATION:	
equipment and accessories—page	ae 95–97

page	• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)
page	[ORS1] adjustable door frame with a flat angle architrave 60 mm-wide
page	[ORS8] adjustable door frame with a flat angle architrave 80 mm-wide
page 90-	NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES









CONSTRUCTION

- the frame is made of MDF board
- : standard filling—"honeycomb"
- 1 2 3 4 5 optional filling-chipboard
- frame with filling is covered with HDF boards on both sides
- door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- . rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- . width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13,5/9 (white zinc)-2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

ADDITIONAL OPTIONS AT EXTRA CHARGE

door without a key hole	no extra charge
door width "100"	
 additional hinge for the door in sizes "60"—"80" 	
 caps for hinges (chrome, satin chrome, golden, black) 	
ventilation undercut	
PVC ventilation sleeves	
 metal ventilation sleeves, round (chrome, golden) 	
 metal ventilation sleeves, square (chrome, nickel) 	
 door made in a non-rebated version for sliding systems 	
double door	
 cylinder lock insert 31/36 	
tubular chipboard filling	
 automatic bottom door seal, widths "60"—"100" 	
 aluminum thresholds, widths: "60"–"100" 	


AVAILABLE GLASS (THE GLOSSY SIDE OF GLASS IS ON THE HINGE SIDE)		
	satinato	standard—no extra charge



AVAILABLE DOOR FRAMES



•	[OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	page 87
•	[OR\$1] adjustable door frame with a flat angle architrave 60 mm-wide	page 88
•	[ORS8] adjustable door frame with a flat angle architrave 80 mm-wide	page 88
•	NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	page 90–91



2/

4 /

3

COLLECTION OF FOILED DOORS

-



AVAILABLE OPTIONS OF DOOR LEAVES EXECUTION

GLE DOUBLE DRS DOORS DOORS FOR SLIDING SYSTEMS





WATCH THE ASSEMBLY VIDEOS ON OUR YOUTUBE CHANNEL





VENEER USED FOR THE PRODUCT AND PHOTO: winter oak (B707)

0-9

00

0-9









CONSTRUCTION

- the frame is made of MDF board
- standard filling—"honeycomb"
- 1 2 3 4 5 optional filling-chipboard
- frame with filling is covered with HDF boards on both sides
- door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- . rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13,5/9 (white zinc)-2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

ADDITIONAL OPTIONS AT EXTRA CHARGE

door without a key hole	no extra charge
door width "100"	•
 additional hinge for the door in sizes "60"–"80" 	
 caps for hinges (chrome, satin chrome, golden, black) 	•
ventilation undercut	•
PVC ventilation sleeves	
 metal ventilation sleeves, round (chrome, golden) 	•
metal ventilation sleeves, square (chrome, nickel)	
door made in a non-rebated version for sliding systems	
double door	
cylinder lock insert 31/36	
tubular chipboard filling	
automatic bottom door seal, widths "60"-"100"	
 aluminum thresholds, widths: "60"–"100" 	•

AVAILABLE GLASS (THE GLOSSY SIDE OF GLASS IS ON THE HINGE SIDE)		
	• satinato	standard—no extra charge



AVAILABLE DOOR FRAMES



page 87	• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)
page 88	[ORS1] adjustable door frame with a flat angle architrave 60 mm-wide
page 88	[ORS8] adjustable door frame with a flat angle architrave 80 mm-wide
page 90–91	NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES




1







AVAILABLE DECORS

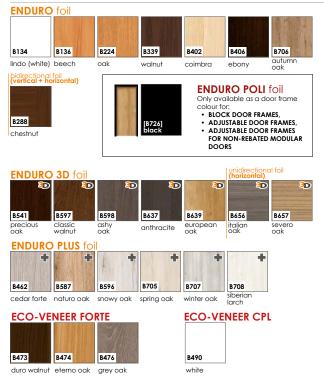

AVAILABLE GLASS (TH	E GLOSSY SIDE OF GLASS IS ON THE HINGE SIDE)
1	sotinato standard—no extra charge

•

.



IONAL INFOR



MATION: cessories—page 95–97		

CONSTRUCTION

- the frame is made of MDF board
- standard filling—"honeycomb"
- 1 2 3 4 5 optional filling-chipboard
- frame with filling is covered with HDF boards on both sides
- door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- . rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)

[ORS1] adjustable door frame with a flat angle architrave 60 mm-wide

NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES

[ORS8] adjustable door frame with a flat angle architrave 80 mm-wide

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13,5/9 (white zinc)-2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

1

2

4

3

ADDITIONAL OPTIONS AT EXTRA CHARGE

no extra charge

page 87

page 88

page 88

page 90–91







AVAILABLE DECORS



AVAILABLE GLASS (THE GLOSSY SIDE OF GLASS IS ON THE HINGE SIDE)



AVAILABLE DOOR FRAMES



CONSTRUCTION

- the frame is made of MDF board
- standard filling—"honeycomb"
- 1 2 3 4 5 optional filling-chipboard
- frame with filling is covered with HDF boards on both sides
- door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- . rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13,5/9 (white zinc)-2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

ADDITIONAL OPTIONS AT EXTRA CHARGE

•	door without a key hole no extra charge
•	door width "100"
•	additional hinge for the door in sizes "60"–"80"
•	caps for hinges (chrome, satin chrome, golden, black)
•	ventilation undercut
•	PVC ventilation sleeves
•	metal ventilation sleeves, round (chrome, golden)
•	metal ventilation sleeves, square (chrome, nickel)
•	door made in a non-rebated version for sliding systems
•	double door
•	cylinder lock insert 31/36
•	tubular chipboard filling
•	automatic bottom door seal, widths "60"-"100"
•	aluminum thresholds, widths: "60"-"100"

. ,			
	 satinato 		standard—no extra charge
	•••••••		••••••

[OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	page 87
[ORS1] adjustable door frame with a flat angle architrave 60 mm-wide	page 88
[ORS8] adjustable door frame with a flat angle architrave 80 mm-wide	page 88
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	page 90–91




1



76 w.invado.pl



AVAILABLE DECORS

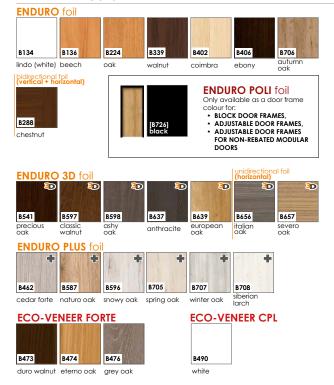

CONSTRUCTION

•

- the frame is made of MDF board
- standard filling—"honeycomb"
- 1 2 3 4 5 optional filling-chipboard
- frame with filling is covered with HDF boards on both sides
- door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- . rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

- lock 72 mm for a standard key, a WC knob, or a cylinder lock insert
- screw-in pivot hinges 13,5/9 (white zinc)-2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

ADDITIONAL OPTIONS AT EXTRA CHARGE

door without a key hole	no extra charge
door width "100"	
 additional hinge for the door in sizes "60"-"80" 	
 caps for hinges (chrome, satin chrome, golden, black) 	
ventilation undercut	
PVC ventilation sleeves	
 metal ventilation sleeves, round (chrome, golden) 	
metal ventilation sleeves, square (chrome, nickel)	
door made in a non-rebated version for sliding systems	
double door	
cylinder lock insert 31/36	
tubular chipboard filling	
 automatic bottom door seal, widths "60"–"100" 	
 aluminum thresholds, widths: "60"–"100" 	

AVAILABLE GLASS (THE GLOSSY SIDE OF GLASS IS ON THE HINGE SIDE)		
	• satinato s	tandard—no extra charge



AVAILABLE DOOR FRAMES



page 87	• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)
page 88	[ORS1] adjustable door frame with a flat angle architrave 60 mm-wide
page 88	[ORS8] adjustable door frame with a flat angle architrave 80 mm-wide
page 90–91	NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES











AVAILABLE DECORS



AVAILABLE GLASS (THE GLOSSY SIDE OF GLASS IS ON THE HINGE SIDE)



AVAILABLE DOOR FRAMES



CONSTRUCTION

i. . . .

•

satinato

- the frame is made of MDF board
- standard filling—"honeycomb"
- 1 2 3 4 5 • optional filling-chipboard
- frame with filling is covered with HDF boards on both sides
- door leaf covered with ENDURO foil or ECO-VENEER
- side edges and upper edge are foiled
- . rounded vertical edges of door leaves (more info on page 86)
- in case of double doors, there is a covering strip (drawing on page 86)
- width of single doors: "60"-"100" / width of double doors: "120"-"200"

STANDARD EQUIPMENT

lock 72 mm for a standard key, a WC knob, or a cylinder lock insert

door leaves TAURUS are available only in CHESTNUT [B288]

1

2

screw-in pivot hinges 13,5/9 (white zinc)-2 pcs for door leaves in sizes "60"-"80", 3 pcs for door leaves in sizes "90" and "100"

ADDITIONAL OPTIONS AT EXTRA CHARGE

no extra charge

• [OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	page 87
[ORS1] adjustable door frame with a flat angle architrave 60 mm-wide	page 88
[ORS8] adjustable door frame with a flat angle architrave 80 mm-wide	page 88
NOTE: THE OFFER ALSO INCLUDES METAL DOOR FRAMES	page 90–91



standard—no extra charge

3

FOLDING DOORS

AVAILABLE OPTIONS OF DOOR LEAVES EXECUTION:

SINGLE DOORS



1

3



AVAILABLE DECORS



BLOCK DOOK FRAMES, ADJUSTABLE DOOR FRAMES, ADJUSTABLE DOOR FRAMES FOR NON-REBATED MODULAR DOORS

CONSTRUCTION

- folding doors consist of a folding door and a block or adjustable door frame
 - construction of each half of the folding door consists of a frame made of MDF board or 33 mm thick semi-finished coniferous wood glued in layers.
- filling—"honeycomb"
- 2 3 frame and filling are covered with 3 mm-thick MDF boards
- 4 door leaf covered with ENDURO foil or ECO-VENEER
- · each half of a door leaf has a rabbet along the vertical edge
- . both parts of a door leaf are joined together with hidden hinges
- . the door leaf is connected to the floor with a spigot fixed in the holder, which is bolted to the floor
- •
- the upper part is connected to the door frame with a spigot fixed in the holder, which is mounted in the rail bolted to the upper element of door frame
- the sliding mechanism (trolley), mounted in the rail, stabilizes the door leaf when opening and closing
- rounded vertical edges of door leaves (more info on page 86)
- . universal door leaf for left or right-hand assembly
- width of single doors: "60"-"90"

STANDARD EQUIPMENT

•	2 silver round grips in color silver

• 2 hidden hinges in color silver

AVAILABLE GLASS	(THE MATT SIDE OF GLASS IS ON THE HINGE SIDE)
-----------------	---

• satinato	standard—no extra charge



[B726]

AVAILABLE DOOR FRAMES



•	[OB3] block door frame (possibility to add an architrave 10 x 60 mm or 16 x 80 mm)	page 87
•	[OR\$1] adjustable door frame with a flat angle architrave 60 mm-wide	page 88
•	[ORS8] adjustable door frame with a flat angle architrave 80 mm-wide	page 88

SLIDING SYSTEMS Pocket door sliding system



AVAILABLE OPTIONS OF DOOR LEAVES EXECUTION

SINGLE DOORS DOUBLE DOORS

NON-REBATED

•••

DOORS WITH

DIAGRAM OF THE LOCATION OF DOOR FRAME ELEMENTS FOR SLIDING SYSTEM—SINGLE SLIDING SYSTEM



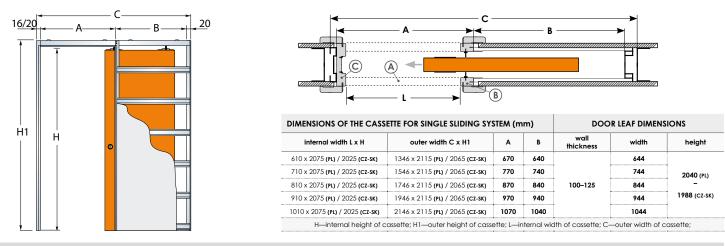



DIAGRAM OF THE LOCATION OF DOOR FRAME ELEMENTS FOR SLIDING SYSTEM—DOUBLE SLIDING SYSTEM






internal width L x H	outer width C x H1	A	В	wall thickness	width	height	
1224 x 2075 (PL) / 2025 (CZ-SK)	2610 x 2115 (PL) / 2065 (CZ-SK)	1290	640		644		
1424 x 2075 (PL) / 2025 (CZ-SK)	3010 x 2115 (PL) / 2065 (CZ-SK)	1490	740	-	744	2040 (PL) -	
1624 x 2075 (PL) / 2025 (CZ-SK)	3410 x 2115 (PL) / 2065 (CZ-SK)	1690	840	100–125	844		
1824 x 2075 (PL) / 2025 (CZ-SK)	3810 x 2115 (PL) / 2065 (CZ-SK)	1890	940	F	944	1988 (CZ-SK	
2024 x 2075 (PL) / 2025 (CZ-SK)	4210 x 2115 (PL) / 2065 (CZ-SK)	2090	1040	r.	1044		

DIAGRAM OF LOCATION OF DOOR FRAME ENLARGING ELEMENTS FOR THE SLIDING DOOR POCKET SYSTEM



CASSETTE ELEMENTS: (A-upper profie + angle architrave / B-vertical profie + angle architrave / C-fender beam + angle architrave)

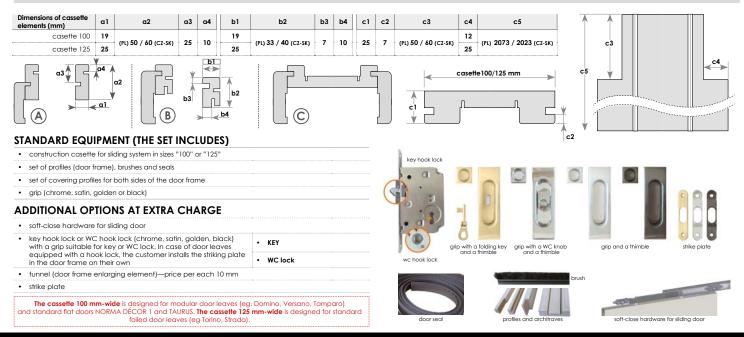

83 ARBONIA & Group

SLIDING SYSTEMS Wall-mounted sliding system

NON-REBATED SINGLE DOORS DOORS

AVAILABLE OPTIONS OF DOOR LEAVES EXECUTION:


.


DOUBLE DOORS WITH DOORS VENTILATION



WATCH ON OUR YOUTUBE CHANNEL: ASSEMBLY AND INSTALLATION OF WALL-MOUNTED SLIDING SYSTEM







	ENSIONS OF DOOR L	.EAF		loor fram	e for the s	single doo	or	door frame for the double door									
	D DOOR FRAME CON-WALL SLIDING S	YSTEM (mm)	"60"	"70"	"80"	"90"	"100"	"120"	"130"	"140"	"150	"160"	"170"	"180"	"190"	"200"	
s1	door leaf width		644	744	844	944	1044	1288	1388	1488	1588	1688	1788	1888	1988	2088	
s2	width of the wall opening*		674	774	874	974	1074	1294	1394	1494	1594	1694	1794	1894	1994	2094	
s3	outer width of the door frame		644	744	844	944	1044	1264	1364	1464	1564	1664	1764	1864	1964	2064	
s4	internal width of the door frame		600	700	800	900	1000	1220	1320	1420	1520	1620	1720	1820	1920	2020	
-	width of the door frame with architraves	60 mm [ORS3]	744	844	944	1044	1144	1364	1464	1564	1664	1764	1864	1964	2064	2164	
s5		80 mm [ORS9]	784	884	984	1084	1184	1404	1504	1604	1704	1804	1904	2004	2104	2204	
h1	door leaf height		(PL) 2040 / 1988 (CZ-SK)														
h2	height of the wall opening							. (PL) 2062 / 1	2008 (cz-s	к)						
h3	outer height of the door fra	me						. (PL) 2047 /	1993 (cz-s	K)						
h4	internal height of the door f	rame*						(PL) 2025 / 1971 (CZ-SK)									
	height of the door frame	60 mm [ORS3]						. (PL) 2097 / 1	2043 (cz-s	к)						
h5	with architraves	80 mm [ORS9]						. (PL) 2117 / 1	2063 (cz-s	К)						
		*Dimensions	of the wall	opening for	the version	without a c	loor frame s	hould be ic	lentical to th	ne internal w	vidth of the	door frame	•				

CLASSIFICATION OF RAILS AND RAIL COVERS DEPENDING ON THE WIDTH OF THE SLIDING SYSTEM

door leaf	length of rail cover	number of rails and angle architraves	door leaf	length of rail cover	number of rails and angle architraves		
"60"	1350 mm		"70" + "70" or "60" + "80"	3000 mm			
"70"	1550 mm	1 rail and angle architrave	"70" + "80" or "60" + "90"	3200 mm	2 rails and angle architraves 200 cm-long		
"80"	1750 mm	200 cm-long	"80" + "80" or "70" + "90" lub "60" + "100"	3400 mm			
"90"	1950 mm		"80" + "90" or "70" + "100"	3600 mm			
"100"	2150 mm		"90" + "90" or "80" + "100"	3800 mm			
"60" + "60"	2600 mm	2 rails and angle architraves 200 cm-long	"90" + "100"	4000 mm			
"60" + "70"	÷		"100" + "100"	4200 mm	3 rails and angle architraves 200 cm-lon		

STANDARD EQUIPMENT (THE SET INCLUDES)

 rail cover in the door leaf decor—installed on ALU strip (two types, depending on the width of the masking angle architrave used in the door frame—60 mm or 80 mm)

- rail—installed on ALU strip
- thimble—1 piece (chrome, satin, golden)
- grip-chrome, satin, golden, black-a set for both sides of door leaf and thimble-1 piece (chrome, satin, golden, black)

ADDITIONAL OPTIONS AT EXTRA CHARGE

humper	ENDURO / PLUS / 3D						
bumper	ECO-VENEER						
key hook lock or WC hook lock (chrome, satin,	• KEY						
golden, black) with a grip suitable for key or WC lock	WC lock						





AVAILABLE DOOR FRAMES



 [ORS3] adjustable door frame with a flat angle architrave 60 mm-wide the set includes: door frame and bumper with milling and striking plate

rail cover

[ORS9] adjustable door frame with a flat angle architrave 80 mm-wide
 the set includes: door frame and bumper with milling and striking plate

Dimensions

DIMENSIONS OF REBATED DOORS "60" "70" "80" "90" "100" 618 718 918 1018 А 818 В 644 744 844 944 1044 С (PL) 2027 / 1975 (CZ-SK) D (PL) 2040 / 1988 (CZ-SK) DIMENSIONS A AND C ARE OUTER DIMENSIONS OF NON-REBATED DOORS AND DOORS PREPARED FOR SLIDING SYSTEMS Contact edges for double doors Ù Ò 0 MODULAR OR FLAT REBATED DOORS WITH BLOCK 0 OR ADJUSTABLE DOOR FRAME COVERING STRIPS ON BOTH SIDES OF THE DOOR MODULAR NON-REBATED DOORS WITH ADJUSTABLE DOOR FRAME COVERING STRIF ON THE DOOR FRAME SIDE R

Rounded vertical and upper edges in door leaves

DOORS	STAN	DARD DOORS	SLIDING SYSTEMS	EDGE FROM THE CONTACT SIDE		
DOORS	REBATED	NON-REBATED	SLIDING STSTEMS	OF DOUBLE DOOR		
MODULAR DOORS	YES	YES	YES	YES		
FLAT DOORS	YES		NO	NO		
FOLDING DOORS	YES*					
*OUTER VERTICAL EDGES ONLY.						

Ventilation

According to the norm, the door to the bathroom, shower and separate WC should open outwards, have the passage width of at least 0.8 m and height of 2 m, and have the ventilation holes for the air supply in the bottom of the door with total ventilation area of at least 0.022 m². The total ventilation area is the sum of the gap under the door (standard 7 mm) and additional solutions that increase the total net ventilation area such as: ventilation sleeves, ventilation undercut and ventilation grid. The use of ventilation grid ensures the correct ventilation area for all door widths, while using the sleeve and/or undercut the increased gap between the door and the floor should be used in order to meet the required regulations. If regulations mentioned above must be obliged, the clients must trim the door on their own.

GUIDELINES FOR BUILDINGS EQUIPPED WITH A RECUPERATION SYSTEM

To ensure adequate air flow from the living areas to the corridor, sanitary, and auxiliary rooms, it is recommended that all internal doors should have a gap at the bottom. The gap area in doors in living and auxiliary rooms should be at least 80 cm² (INVADO doors with an undercut fully meet this requirement). The size of the ventilation gap in doors in sanitary rooms should be 200 cm².



ventilation undercut


ventilation grid (Norma Decor)




door width	number of ventilation sleeves	door leaf with metal ventilation sleeves total ventilation area: ventilation sleeves and the gap under the door (7 mm) [m2]	door leaf with PVC ventilation sleeves for foiled doors total ventilation area: ventilation sleeves and the gap under the door (7 mm) [m2]	door leaf with PVC ventilation sleeves for modular doors total ventilation area: ventilation sleeves and the gap under the door (7 mm) [m2]	total ventilation area: ventilation undercut and the gap under the door (7 mm) [m2]	total ventilation area: ventilation grid and the gap under the door (7 mm) [m2]
"60"	3	0,0069	0,0062	0,0056	0,00835	
"70"	4	0,0085	0,0075	0,0067	0,01085	
"80"	5	0,0101	0,0089	0,0079	0,01335	
"90"	6	0,0117	0,0103	0,0090	0,01585	> 0,022
"100"	6	0,0124	0,0110	0,0097	0,01835	
"60" "70" "80" "90"	6	0,0131	0,0117	0,0104	0,02085	

DOOR COLLECTIONS WHERE THE VENTILATION SLEEVES, VENTILATION UNDERCUT AND VENTILATION GRID CANNOT BE USED: D'ARTAGNAN COLLECTION. THERE IS NO POSSIBILITY TO SIMULTANEOUSLY USE MORE SOLUTIONS FOR VENTILATION IN INVADO DOORS.


DOOR FRAMES Block door frame for rebated doors

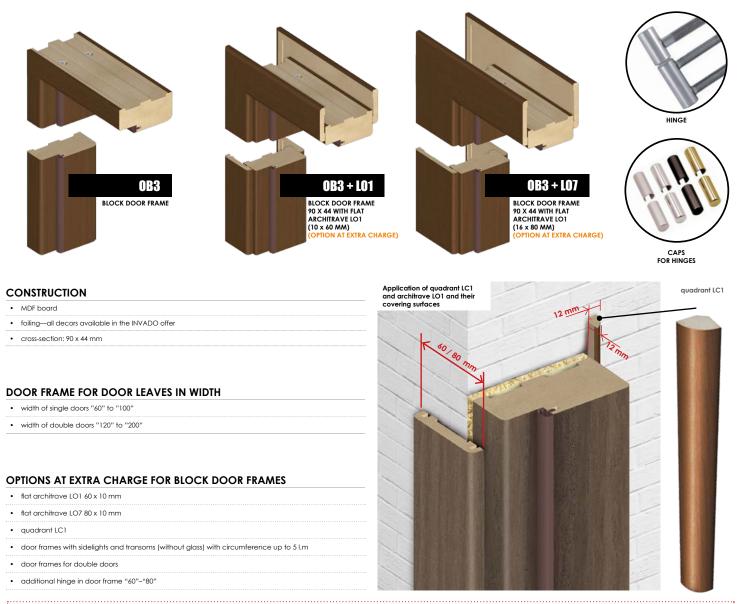

COVERING TRIMS (LO1) AND QUADRANT (LC1) CAN BE APPLIED TO A BLOCK DOOR FRAME FOR DOOR LEAVES IN WIDTHS "60"-"90". IN CASE OF DOOR LEAVES IN WIDTH "100" YOU HAVE TO ORDER DOUBLE COVERING TRIM OR DOUBLE QUADRANT (LC2).

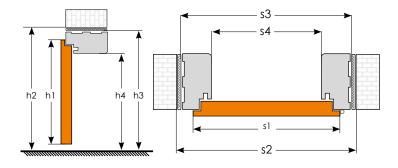

	ENSIONS OF DOOR LEAF) DOOR FRAME		s	ingle doo	r		double door									
	door le	ıf: "60"	"70"	"80"	"90"	"100"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"	"200"	
s1	door leaf width	644	744	844	944	1044	1264	1364	1464	1564	1664	1764	1864	1964	2064	
s2	width of the wall opening	718	818	918	1018	1118	1338	1438	1538	1638	1738	1838	1938	2038	2138	
s3	outer width of the door frame	688	788	888	988	1088	1308	1408	1508	1608	1708	1808	1908	2008	2108	
s4	internal width of the door frame	600	700	800	900	1000	1220	1320	1420	1520	1620	1720	1820	1920	2020	
h1	door leaf height						(P	L) 2040 /	1987 (cz-s	iK)						
h2	height of the wall opening						(P	L) 2084 / 3	2029 (cz-s	iK)	-					
h3	outer height of the door frame		(PL) 2069 / 2014 (CZ-SK)													
h4	internal height of the door frame						(P	L) 2025 /	(PL) 2025 / 1970 (CZ-SK)							

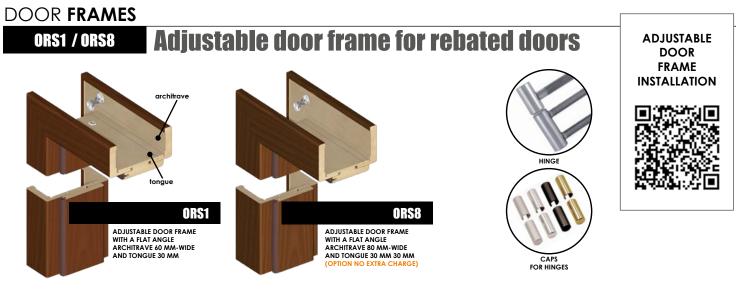

CONSTRUCTION

. MDF board

foiling—all decors available in the INVADO offer

standard adjustable door frame consists of central element plus 2 sets of angle architraves joined at 45°. Standard angle architrave consists of a flat architrave 60 mm-wide and a "tongue" 30 mm-long. There is a possibility to order:

 a) adjustable door frame with a flat angle architrave 80 mm-wide (ORS8),
 b) a set of flat angle architraves 60 mm or 80 mm-wide with a "tongue" 50 mm-long (sold separately). See the table of options at extra charge.

DOOR FRAME FOR DOOR LEAVES IN WIDTH


- width of single doors "60" to "100"
- width of double doors "120" to "200"

OPTIONS AT EXTRA CHARGE FOR ADJUSTABLE DOOR FRAMES

- door frames with sidelights and transoms (without glass) with circumference up to 5 l.m
- door frames for double doors
- additional hinge in door frame "60"-"80"
- standard angle architrave (a "tongue" 30 mm-long, an architrave 60 or 80 mm-wide)
- angle architrave with longer "tongue" (a "tongue" 50 mm-long, an architrave 60 or 80 mm-wide)
- wall framing ("blind door frame")

RANGES OF WALL THICKNESS COVERING

Adjustable door fame is made in dimensions adjustable to the wall thickness in steps of 20 mm. The minimum wall thickness is 75 mm. NOTE: due to special mills there is a possibility to trim the frame and reduce the wall thickness coverage by 15 mm. Door frame for the wall thickness greater than 340 mm consists of at least two connected components.

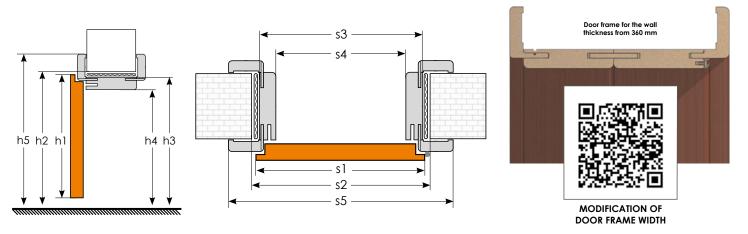

	ENSIONS OF DOOR L DOOR FRAME	EAF		s	ingle do	or		double door								
		door leaf:	"60"	"70"	"80"	"90"	"100"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"	"200"
s1	door leaf width		644	744	844	944	1044	1264	1364	1464	1564	1664	1764	1864	1964	2064
s2	width of the wall opening		674	774	874	974	1074	1294	1394	1494	1594	1694	1794	1894	1994	2094
s3	outer width of the door frame		644	744	844	944	1044	1264	1364	1464	1564	1664	1764	1864	1964	2064
s4	internal width of the door frame		600	700	800	900	1000	1220	1320	1420	1520	1620	1720	1820	1920	2020
	width of the door frame with architraves	60 mm [ORS1]	744	844	944	1044	1144	1364	1464	1564	1664	1764	1864	1964	2064	2164
s5		80 mm [ORS8]	784	884	984	1084	1184	1404	1504	1604	1704	1804	1904	2004	2104	2204
h1	door leaf height							(PL) 2040 / 1988 (CZ-SK)								
h2	height of the wall opening	9						(PL) 2062 / 2008 (CZ-SK)								
h3	outer height of the door fi	rame		-		-	-	(PL) 2047 / 1993 (CZ-SK)								
h4	internal height of the doo	r frame		-				. (I	PL) 2025 /	1971 (cz-s	5K)					
	height of the door	60 mm [ORS1]						. (I	PL) 2097 /	2043 (cz-s	SK)					
h5	frame with architraves	80 mm [ORS8]						. (I	PL) 2117 /	2063 (cz-s	SK)					

NOMINAL COVERAGE OF THE WALL FOR ADJUSTABLE DOOR FRAMES


symbol	Α	В	с	D	E	F	G	н	I	J	
wall thickness	75–94	95–114	120–139	140-159	160–179	180–199	200–219	220–239	240–259	260–279	
symbol	ĸ	L	м	N	o	P	Q	R	S	Т	U
wall thickness	280–299	300–319	320–339	340–359	360–379	380–399	400–419	420–439	440–459	460–479	480-499*

*It is possible to order adjustable door frame thicker than 499 mm—for this purpose please contact with INVADO's commercial department

.inva

DOOR FRAMES

Adjustable door frame for non-rebated modular doors **ORS7/ ORS10**

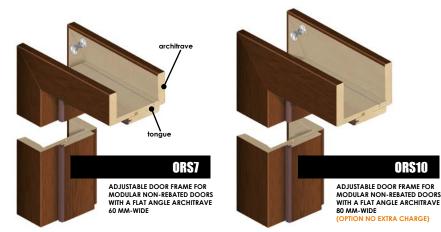



WITH 3D REGULATION (NON-REBATED DOORS)

CONSTRUCTION

MDF board

s1

s2

s3

s4

s5

h1

h2

h3

h4

h5

height of the door frame with architraves

• foiling—all decors available in the INVADO offer

standard adjustable door frame consists of central element plus 2 sets of angle architraves joined at 45°. Standard angle architrave consists of a flat architrave 60 mm-wide and a "tongue" 30 mm-long. There is a possibility to order:


a) adjustable door frame with a flat anale architrave 80 mm-wide (ORS10)


b) a set of angle architraves 60 mm or 80 mm-wide with a "tongue" 50 mm-long (sold separately). See the table of options at extra charae

DOOR FRAME FOR DOOR LEAVES IN WIDTH

width of single doors "60" to "100'

width of double doors "120" to "200' •





OPTIONS AT EXTRA CHARGE FOR ADJUSTABLE NON-REBATED MODULAR DOORS

- door frames with sidelights and transoms (without glass) with circumference up to 5 l.m
- door frames for double doors
- · additional hinge in door frame

ORS10


- standard angle architrave (a "tongue" 30 mm-long, an architrave 60 or 80 mm-wide)
- angle architrave with longer "tongue" (a "tongue" 50 mm-long, an architrave 60 or 80 mm-wide)

RANGES OF WALL THICKNESS COVERING

(PL) 2117 / 2063 (CZ-SK)

Adjustable door fame is made in dimensions adjustable to the wall thickness in steps of 20 mm. The minimum wall thickness is 75 mm. **NOTE: due to special mills there is a possibility to trim the frame and reduce the wall thickness coverage by 15 mm**. Door frame for the wall thickness greater than 340 mm consists of at least two connected components.

Door frame for the wall thickness from 360 mm

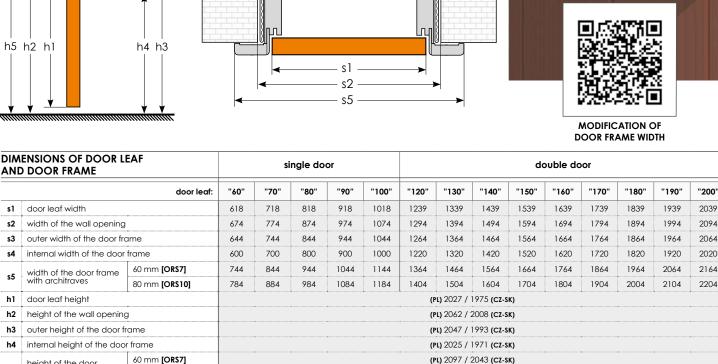

NOMINAL COVERAGE OF THE WALL FOR ADJUSTABLE DOOR FRAMES

60 mm [ORS7]

80 mm [ORS10]

symbol	Α	В	с	D	E	F	G	Н	I	J	
wall thickness	75–94	95–114	120–139	140–159	160–179	180–199	200–219	220–239	240–259	260–279	
symbol	ĸ	L	м	N	0	P	Q	R	S	т	U
wall thickness	280–299	300–319	320–339	340–359	360–379	380–399	400–419	420–439	440–459	460–479	480-499*

*It is possible to order adjustable door frame thicker than 499 mm—for this purpose please contact with INVADO's commercial department

DOOR FRAMES

FD 11 / FD 12

METAL FRAMES ARE CERTIFIED TO BE SOLD IN POLAND

Metal door frame (big)



CONSTRUCTION

- welded frame
- ungalvanized plate with a thickness of 1,2 mm
- powder-coated frame in a choice of standard RAL colours
- 2 hinges in color white zinc and a seal included

• universal mounting brackets for brick walls and plasterboard walls


DOOR FRAME FOR DOOR LEAVES IN WIDTH

- width of single doors "60" to "110"
- width of double doors "120" to "200"

RANGES OF WALL THICKNESS COVERING

- door frame FD11-75 mm
- door frame FD12-100 mm

DIM	DIMENSIONS OF DOOR LEAF		single door						double door						
AN	DOOR FRAME FD11 AND FD12	"60"	"70"	"80"	"90"	"100"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"	"200"
s1	door leaf width	644	744	844	944	1044	1264	1364	1464	1564	1664	1764	1864	1964	2064
s2	width of the wall opening	670	770	870	970	1070	1290	1390	1490	1590	1690	1790	1890	1990	2090
s3	outer width of the door frame	696	796	896	996	1096	1316	1416	1516	1616	1716	1816	1916	2016	2116
s4	internal width of the door frame	600	700	800	900	1000	1220	1320	1420	1520	1620	1720	1820	1920	2020
h1	door leaf height			-				•	2040	-	•	-	•		-
h2	height of the wall opening		2037												
h3	outer height of the door frame		2072												
h4	internal height of the door frame		2024												

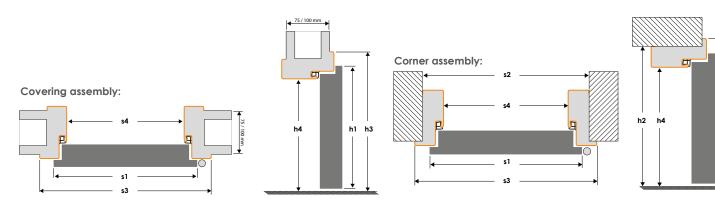

OPTIONS AT EXTRA CHARGE FOR METAL DOOR FRAMES

- reinforcement for the self-closer
- adapted for electric door strike


AVAILABLE DECORS RAL: 9010—white / 9016—white / 8017—chocolate brown / 7047—gray / 7024—graphite / 1001—beige


h1 h3

Metal door frame (small)



FD 14





CONSTRUCTION


- welded frame
- ungalvanized plate with a thickness of 1,2 mm
- powder-coated frame in a choice of standard RAL colours
- 2 hinges in white zinc and seal included
- universal mounting brackets for brick walls and plasterboard walls


DIM	DIMENSIONS OF DOOR LEAF		si	ngle do	or		double door								
AND DOOR FRAME FD14		"60"	"70"	"80"	"90"	"100"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"	"200"
s1	door leaf width	644	744	844	944	1044	1264	1364	1464	1564	1664	1764	1864	1964	2064
s2	width of the wall opening	661	761	861	961	1061	1281	1381	1481	1581	1681	1781	1881	1981	2081
s3	outer width of the door frame	696	796	896	996	1096	1316	1416	1516	1616	1716	1816	1916	2016	2116
s4	internal width of the door frame	600	700	800	900	1000	1220	1320	1420	1520	1620	1720	1820	1920	2020
h1	door leaf height					-	•		2040						
h2	height of the wall opening		2038												
h3	outer height of the door frame		2072												
h4	internal height of the door frame		2024												

FD 61–67

Adjustable metal door frame







CONSTRUCTION

- 2-part frame, adjustable (adjustment range in 30 mm steps)
- ungalvanized plate with a thickness of 1,5 mm
- powder-coated frame in a choice of standard RAL colours
- 3 hinges in color white zinc and seal included
- universal mounting brackets for brick walls and plasterboard walls

DOOR FRAME FOR DOOR LEAVES IN WIDTH

DOOR FRAME FOR DOOR LEAVES IN WIDTH

• width of single doors "60" to "110"

• width of double doors "120" to "200"

width of single doors "60" to "110"

•	width of double doors "120" to "200"

 RANGES (OF WALL	THICKNE	SS COVE	RING				
 door frame:	FD61	FD62	FD63	FD64	FD65	FD66	FD67	
ranges:	95-125	125-155	155–185	185–215	215-245	245-275	275-305	

	DIMENSIONS OF DOOR LEAF AND DOOR FRAME		si	ngle do	or		double door								
ADJUSTABLE METAL DOOR FRAME		"60"	"70"	"80"	"90"	"100"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"	"200"
s1	door leaf width	644	744	844	944	1044	1264	1364	1464	1564	1664	1764	1864	1964	2064
s2	width of the wall opening	683	783	883	983	1083	1300	1400	1500	1600	1700	1800	1900	2000	2100
s3	outer width of the door frame	716	816	916	1016	1116	1334	1434	1534	1634	1734	1834	1934	2340	2134
s4	internal width of the door frame	600	700	800	900	1000	1220	1320	1420	1520	1620	1720	1820	1920	2020
h1	door leaf height						•	•	2040				•		
h2	height of the wall opening				-				2065				-		
h3	outer height of the door frame	2082													
h4	internal height of the door frame	2024													

DOOR FRAMES Concealed door frame SARA-PRO






NON-REBATED DOOR LEAF FOR OUTER DOOR FRAME AND REBATED DOOR LEAF FOR INNER DOOR FRAME BASED ON DOOR LEAF NORMA DECOR 1


CONCEALED DOOR FRAME-INNER



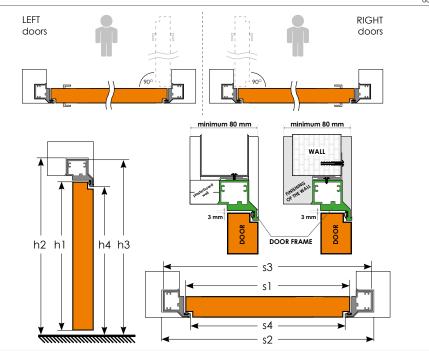

CONCEALED DOOR FRAME SARA-PRO-OUTER



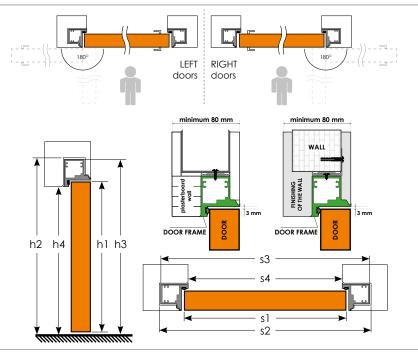

The Sara Pro Door frame introduces a completely new quality in interior decoration. Invisible to the naked eye, it makes the area lighter. Ideal for minimalist and modern interiors. Available in outer and inner version.

CONSTRUCTION

•	the frame is made of MDF board
•	the surface and edges of a door leaf are primed and prepared for painting or wallpapering (painting and wallpapering on your own)
•	filling—"honeycomb" or tubular chipboard (optionally)
•	frame with filling is covered with HDF boards on both sides
•	width of single doors "60"–"90"
ST	ANDARD EQUIPMENT OF A DOOR LEAF
•	2 hidden hinges
•	magnetic lock for standard key, WC knob or cylinder lock insert
AI	DDITIONAL OPTIONS AT EXTRA CHARGE
•	door without a key hole no extra charge
•	ventilation undercut
•	PVC ventilation sleeves
•	cylinder lock insert 31/36
•	filling—tubular chipboard
•	automatic door bottom seal for door width "60"-"90"
•	ventilation grid

DIMENSIONS OF A DOOR LEAF AND CONCEALED DOOR FRAME

inne	er door frame	"60"	"70"	"80"	"90"
s1	door leaf width	618	718	818	918
s2	width of the wall opening	698	798	898	998
s3	outer width of the door frame	688	788	888	988
s4	internal width of the door frame	603	703	803	903
h1	door leaf height		(PL) 2027 / 1	975 (CZ/SK)	
h2	height of the wall opening		(PL) 2076 / 2	2024 (CZ/SK)	-
h3	outer height of the door frame		(PL) 2069 / 2	2017 (CZ/SK)	
h4	ernal height of the door frame		(PL) 2027 / 1	975 (CZ/SK)	
oute	er door frame	"60"	"70"	"80"	"90"
s1	door leaf width	618	718	818	918
s2	width of the wall opening	698	798	898	998
s3	outer width of the door frame	688	788	888	988
s4	internal width of the door frame	603	703	803	903
h1	door leaf height		(PL) 2017 / 1	965 (CZ/SK)	
h2	height of the wall opening		(PL) 2066 / 2	2014 (CZ/SK)	
h3	outer height of the door frame		(PL) 2059 / 2	2007 (CZ/SK)	-
h4	ernal height of the door frame		(PL) 2017 / 1	965 (C7/SK)	

ATTENTION:


It's possible to paint SARA-PRO door frame with a wall paint after previously coating it with a primer paint included in the package

DOOR FRAMES

ORS5

Housing system for metal frames




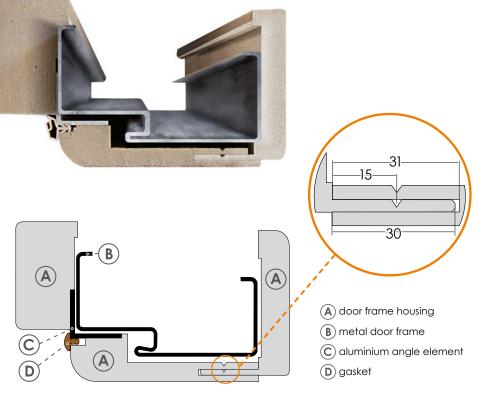

FEATURES


Metal frame housing (covering) allows to install new doors in the rooms where metal frames were mounted in accordance with the Polish standard (regarding dimensions) without having to remove these frames. The advantage of this solution is an easy installation with mounting foam, without dirty floors and walls, and the ability to mount a standard foiled INVADO door leaves.

WIDTH OF THE DOOR FRAME FOR DOOR LEAVES	INT	INTERNAL DIMENSIONS OF METAL DOOR FRAME (mm)								
• width of single doors"60" to "100"	door leaf:			"70"	"80"	"90"				
RANGES OF WALL THICKNESS	s1	door leaf width	600	700	800	900				
• 60-94, 95-129, 130-199, 200-269	h1	door leaf height		(PL) 2025 / 1975		Z/SK)				

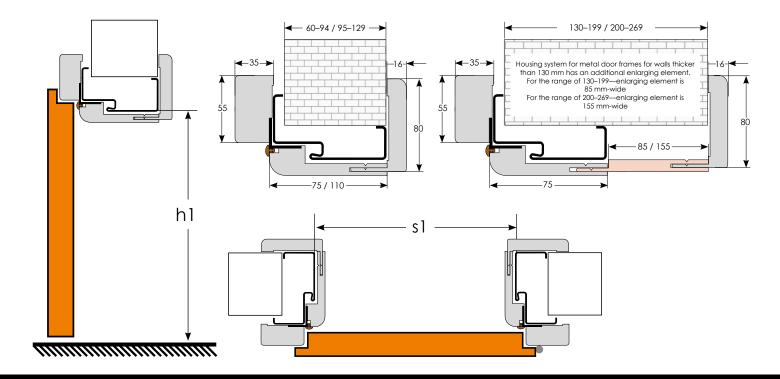

ACCESSORIES **Foiled and modular doors**



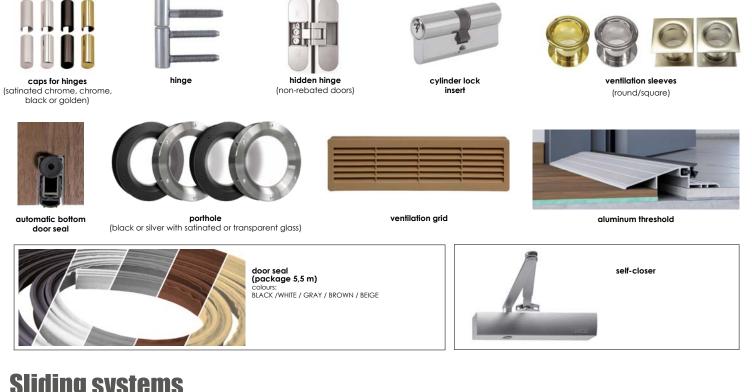

Sliding systems









grip and thimble

strike plate

soft-close hardware for sliding door



 $WC \setminus KEY$

door seal (pocket door sliding system)



grip with WC knob,

thimble and striking

plate

profiles and architraves (pocket door sliding system)



brush (pocket door sliding system)



(wall-mounted sliding system)

der

0

rail cover (wall-mounted sliding system)

KICK and PUSH metal panels

thimble and striking

plate

- material: polished stainless steel
- dimensions: width matched to the door leaf, height 300 mm, thickness 0,6 mm
- ventilation undercut—height: 15 mm
- ventilation sleeves-diameter: 40 mm (depending on the width of the door leaf, a different number of ventilation sleeves are used: "60"-3 sleeves / "70"-4 sleeves / "80"-5 sleeves / "90"-"100"-6 sleeves
- . ventilation grid—dimensions: 430 x 110 mm

KICK/PUSH bottom panel with handle holes

KICK bottom panel

with ventilation sleeves



KICK bottom panel with ventilation undercut

KICK bottom panel with ventilation grid



HANDLES

HANDLLJ				
NEW	Escutcheons:			i matt golden
Management of the second s	Salati - Sulat	CARL COM	Market (Met 2	matt copper
The second se			0	glossy chrome
			ALL	matt chrome
handle SPIGOLA-QR photo: matt copper				6 black
NEW				glossy chrome
N. T				matt nickel
				white
				glossy gold
handle FOSTER-BI				black
	D			satin nickel/chrome
handle DUO				graphite/chrome
photo: graphite/chrome				
				satin nickel/chrome
handle ENTRA photo: anthracite/chrome				anthracite/chrome
Eter entrecite/chore				Satin nickel/chrome Image: Satin nickel/chrome Image: Satin nickel/chrome
Endle EUFORIO brote: block	l	1		b lack
handle SPARK FIT Pote: block	I	1		b lack
Endle September Bardie September)	3		stainless steel



	Escutcheons:			
handle SPARK Poter satin nicket	0	1		satin nickel
Endle TOTAL-Q Detre glosy of trans]	?		 matt chrome glossy chrome black
NEW handle SPLASH	0	0	6	 glossy chrome matt chrome black
NEW CONTRACTOR Andle VIOLA Photo: glossy chrome				 glossy chrome matt chrome glossy gold black
Andle GIUSSY photo: rickel/chrome	0			 nickel/chrome brown grafiatto
handle INVADO Prote: rickel/ctrome	0			e nickel/chrome
handle PRESTO Prote: rickel/chrome	0			ickel/chrome
handle UNO-R photo: stainless steel				stainless steel
handle INC	Standard Key Escutcheon	Euro Key Escutcheon	Bathroom Thumbturn Escutcheon	
handle UNO photo: stainless steel				stainless steel

SKIRTINGS COLLECTION




WATCH ON OUR YOUTUBE CHANNEL PRESTIGE **SKIRTINGS** INSTALLATION

model P124















dimension (mm): 110 x 16 x 2400

available decors:

white primer foil B145 (for painting)

ENDURO foil-white B134

ADDITIONAL OPTIONS AT EXTRA CHARGE

- finishing element 20 x 20 x 120 mm
- clips—30 pcs/package

Skirting length—240 cm. Skirtings are packed 5 pcs/package. The price is for 1 piece







16

P403









ENDURO foil-white B134

ENDURO foil-white B134





-

-

-

-_ - 3

invado.pl/en/

0 f in

facebook.com/**invado** linkedin.com/company/**invado-sp-z-o-o**-instagram.com/**invado.drzwi.otwieramymarzenia**/

DOOR BUYING AND INTERIOR DECORATING TIPS: invado.pl/en/blog

EXPORT MANAGERS:

tel. +48 34 351 38 82 mob. +48 513 120 072

tel. +48 34 351 05 49 mob. +48 509 680 283

teL +48 34 351 38 78 mob. +48 503 186 762

mob. +48 508 052 407

INVADO Sp. z o.o.

Dzielna, ul. Leśna 2 42-793 Ciasna, Polska

e-mail: biuro@invado.pl tel. +48 34 351 05 40 fax +48 34 353 56 02



ARBONIA 🏠 Group

Distributor's stamp:

All information in the catalogue do not constitute an offer within the meaning of the Civil Code and are published for Informational purposes only. Manufacturer reserves the right to make changes.

Note! Due to the printing technique the colors of the products presented in the catalogue may differ from the original. All rights reserved. Copying and publication of this catalogue on web sites and in other media without the written consent from INVADO Sp. z o.o. is prohibited.